INCH-POUND

MIL-PRF-1/1099G
AMENDMENT 1
20 August 1999

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, THYRATRON
TYPES 5948A AND 5948B

This amendment forms a part of MIL-PRF-1/1099G, dated 18 July 1997, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title: Delete "TYPES 5948A AND 5948B" and substitute: "TYPES 5948A, 5948B, AND 5948C".

PAGE 2

Table I: Inspection column, delete "Quality conformance inspection" and substitute "Conformance inspection" (3 places).

PAGE 3

Table I: Inspection column, delete "Quality conformance inspection" and substitute "Conformance inspection".

Table I: Inspection column, delete "Dc" and substitute: "DC" (2 places).

PAGE 5

Figure 1, dimension table, delete "Quality conformance inspection" and substitute "Conformance inspection" (2 places).

Figure 1, dimension table, delete "See note K" and substitute "See note k".

PAGE 7

Figure 2, dimension table, delete "Quality conformance inspection" and substitute "Conformance inspection" (2 places).

Figure 2, dimension table, delete "See note K" and substitute "See note k".

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
8a	New
8b	New

DISTRIBUTION STATEMENT A. Approved for public use, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11

Review activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19, 99

Preparing activity:
DLA - CC

(Project 5960-3542)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:09Z
Check the source to verify that this is the current version before use.

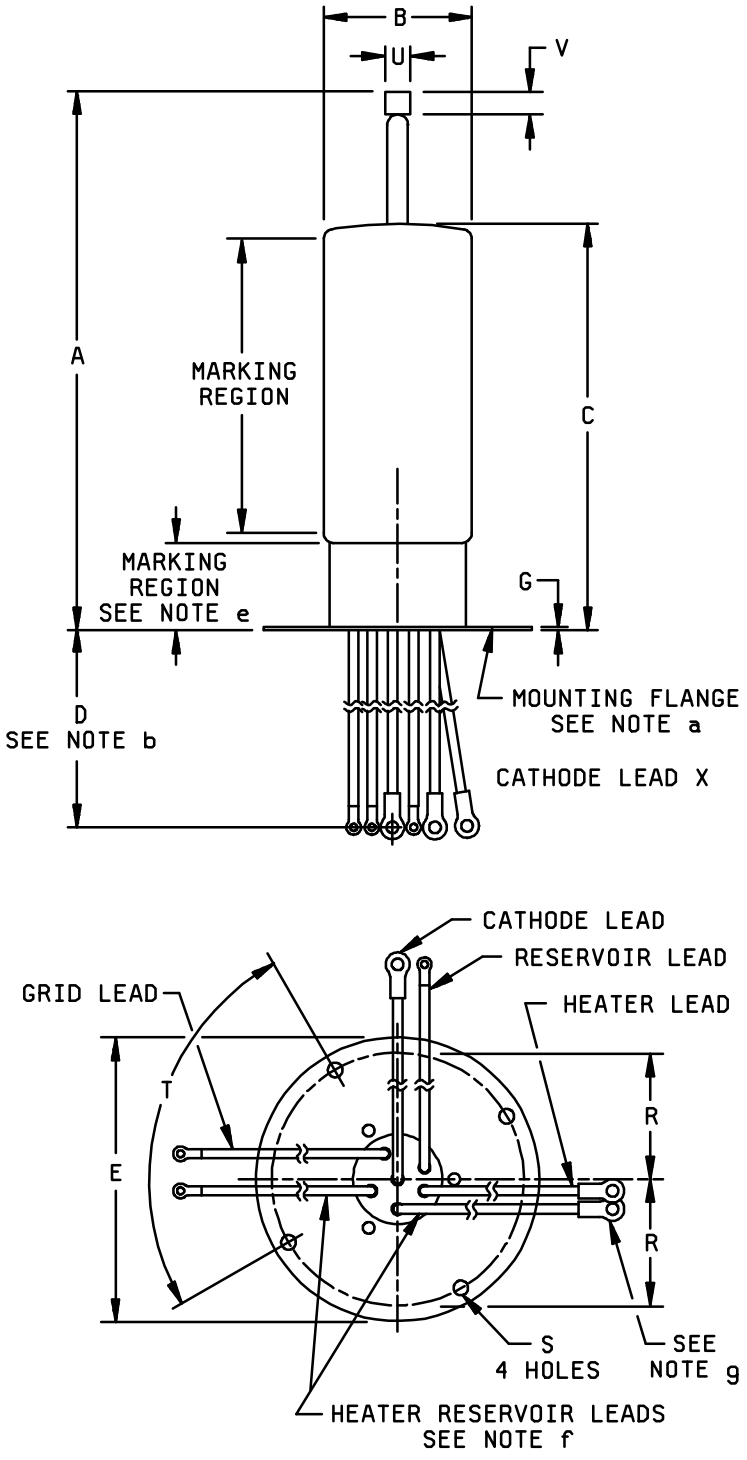

FIGURE 5. Outline drawing of electron tube type 5948C (alternate glass version).

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:09Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	11.530	12.281	292.87	311.93
B	---	3.312	---	84.12
C	8.343	9.469	211.90	240.50
R	2.662	2.682	67.61	68.12
T	89°60'	90°40'	89°60'	90°40'
Conformance inspection, part 3 (see note j)				
D	7.500	8.500	190.50	215.90
E	5.938	6.062	150.83	153.97
S	.309	.315	7.85	8.00
U	.559	.573	14.20	14.55
V	.500	---	12.70	---
Reference dimensions				
G	.063		1.60	
W	14 AWG		2.5 mm^2	
X	10 AWG		6.0 mm^2	

NOTES:
a. Mounting flange is electrically isolated.
b. Dimension D is measured from bottom of flange to center of lead lug hole.
c. Leads shall be flexible. Leads shall be identified as follows:

Lead	Color	Sleeving	Reference dimension	Lug (see note h)
G (grid)	Green	H-A-1 (see note d)	W	MS25036-108
H (heater)	Yellow	H-A-1 or H-8-1	W	MS25036-157
HR (heater) (see note f)	Yellow with black sleeve	H-A-1 or H-8-1	W	MS25036-157
HR (reservoir) (see note f)	Red with yellow sleeve	H-A-1 or H-8-1	W	MS25036-108
R (reservoir)	Red	H-A-1 or H-8-1	W	MS25036-108
K (cathode)	Black	H-A-1 or H-8-1	X	MS25036-157

d. As specified in MIL-I-3190.
e. Reservoir voltage shall be inscribed once above each mounting hole on aluminum base shell.
f. Heater lead HR internally connected to reservoir lead HR.
g. Cathode heater connection to this lead.
h. Lugs shall be permanently identified with symbols as follows:
G (grid), K (cathode), H (heater), R (reservoir), and HR (heater-reservoir).
i. Holes shall be inspected for orientation by using the base gauge outlined in figure 4.

FIGURE 5. Outline drawing of electron tube type 5948C (alternate glass version) - Continued.

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:09Z
Check the source to verify that this is the current version before use.