DDD-B-151F
October 8, 1970
SUPERSEDING
Fed. Spec. DDD-B-151e
January 25, 1966

FEDERAL SPECIFICATION

BEDSPREAD, COTTON OR COTTON/RAYON BLEND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a cotton or a cotton/rayon blend bedspread.

1.2 Classification. Bedspreads shall be of the following types, styles, and sizes as specified in table I (see 6.2).

Type I - Crinkle
Sizes 1, 3, 4

Type II - Dimity

Type III - Herringbone stripe
Sizes 1, 2, 3

Type IV - Corded
Style A
Style B
Sizes 1, 2, 3, 4

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Federal Specifications:

V-T-276	-	Thread, Cotton.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-636	-	Box, Fiberboard.
PPP-T-45	-	Tape, Gummed Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

FED-STD-4	-	Glossary of Fabric Imperfections.
FED-STD-123	-	Marking for Domestic Shipment (Civilian Agencies).
FED-STD-191	-	Textile Test Methods.
FED-STD-751	-	Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies).

Military Specification:

MIL-B-17757	-	Boxes, Fiberboard, Corrugated (Modular Sizes).

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-16686	-	Medical Services Symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Rules and Regulations Under the Textile Fiber Products

Identification Act

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D. C. 20580).

Technical Manual and Year Book of American Association

of Textile Chemists and Colorists

(Application for copies should be addressed to AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, N.C. 27709).

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W. Washington, D. C. 20036).

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill., 60606).

3. REQUIREMENTS

3.1 Samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the sample in which case this specification shall govern.

3.1.2 Standard sample. The finished bedspread shall match the standard sample for shade, design and pattern, and shall be equal or better than the standard sample in all characteristics for which the standard sample is referenced (see 6.3). When a commercial design is selected, the approved sample shall, for the contract, become the standard for the characteristics for which it has been approved.

3.2 First article. When specified (see 6.2), before production is commenced, a sample of the finished bedspread of each type, style and size being procured, shall be submitted or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production item.

Table I. Physical requirements

Type	Size of finished bedspread (after laundering) Minimum Inches	Weight of finished bedspreads Minimum Ounces	Yarns/Inch Minimum Warp	Yarns/Inch Minimum Filling	Breaking strength Minimum Warp Pounds	Breaking strength Minimum Filling Pounds
I Crinkle Size 1	63 by 97	24.0	72 in plain ground	62	50	50
Size 3	72 by 97	27.0	62 in crinkle stripe	62	50	50
Size 4	72 by 106	29.0	62	62	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements (cont'd)

Type	Size finished bedspread (after laundering)	Weight of finished bedspreads	Yarns/Inch Minimum		Breaking strength Minimum	
	Minimum Inches	Minimum Ounces	Warp	Filling	Warp Pounds	Filling Pounds
II Dimity	81 by 103	32.5	70	60	75	45
III Herring-bone stripe 1/						
Size 1	56 by 88	23.0	68	38	80	50
Size 2	63 by 106	31.0	68	38	80	50
Size 3	72 by 106	35.0	68	38	80	50
IV Corded Style A Bedspreads with four square cut corners						
Size 1	63 by 103	38.0	65 including the cotton cords	32	85	65
Size 2	76 by 103	46.0	65	32	85	65
Size 3	76 by 113	49.0	65	32	85	65
Size 4	90 by 113	57.0	65	32	85	65
Style B Bedspreads with two square cut corners at one end, and two round corners at the opposite end						
Size 1	63 by 103	37.0	65 including the cotton cords	32	85	65
Size 2	76 by 103	45.0	65	32	85	65
Size 3	76 by 113	48.0	65	32	85	65
Size 4	90 by 113	56.0	65	32	85	65

1/ The herringbone stripe shall consist of solid color bands of narrow ribbed and chevron stripes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Bedspreads. The bedspreads shall be either all cotton or a blend of cotton/rayon as specified in 3.3.1.1 or 3.3.1.2 (see 6.2).
Note: Bedspreads for Defense Medical procurements shall be all cotton (see 6.2).

3.3.1.1 Bedspreads, cotton. The yarn for the bedspreads shall be made from cotton which has been carded, drawn and spun into singles yarn for both warp and filling. The bedspreads shall meet the requirements specified in table I when tested as specified in 4.4.

3.3.1.2 Bedspreads, cotton/rayon blend. The yarn for the bedspreads, except for the cords for type IV bedspreads which shall be all cotton, shall consist of a blend of 50 percent cotton, as specified in 3.3.1.1, and 50 percent high wet-strength modulus type rayon, with a tolerance of plus or minus 5.0 percent for fiber content on a conditioned basis when tested as specified in 4.4.1. The bedspreads shall meet all requirements specified in table I when tested as specified in 4.4.

3.3.2 Thread. The thread used for hemming shall be 3 ply, ticket number 40, conforming to type 1A2 and 1A3 of V-T-276. The color of the thread shall match the color of the basic material. The dyed thread shall show good colorfastness to laundering, light, and bleaching when tested as specified in V-T-276.

3.4 Construction. The bedspread shall be fabricated from one piece of fabric that has straight woven selvages with the ends of the bedspread cut parallel to the filling yarns. The ends of the bedspread shall be hemmed. As an alternate the bedspreads may be fabricated with the sides of the bedspreads cut parallel to the warp yarns. The four corners shall be square cut, except for type IV bedspreads, which shall have either four square cut corners, or two square cut corners at one end, and two rounded corners at the opposite end (see table I and 6.2). The ends and sides of the bedspread shall be hemmed as specified in 3.4.2.

3.4.1 Stitches, seams and stitching. The stitches, seams and stitching types shall conform to FED-STD-751. Thread breaks shall be secured by stitching back or break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.4.2 Hems. The finished hems for the four square cut corner bedspreads shall be not less than 3/4 inch wide, with the raw edges turned under not less than 1/4 inch, using stitching type EFb-1. The finished hems for bedspreads with two square cut corners at one end and two round corners at the opposite end shall be not less than 5/16 inch wide, with the raw edges turned under not less than 3/16 inch, using stitching type EFb-1. All hems shall be stitched with not less than 5, nor more than 8 stitches per inch, using stitch type 301. The stitching shall be 1/16 to 1/8 inch from the turned edge. Bedspreads furnished with selvage sides shall not be side hemmed.

3.5 Design. Unless otherwise specified in the contract or order (see 6.2), selected commercial designs shall be furnished for the bedspreads.

3.6 Sizes. Bedspreads shall be furnished in the sizes specified in table I (see 6.2).

3.7 Weave and finish.

3.7.1 Type I - Crinkle.

3.7.1.1 Weave. Type I bedspreads shall be of any weave or combination of weaves that will produce an alternate crinkle stripe and smooth stripe in the finished bedspreads. The ground ends, adjacent to all crinkle stripes which measure 3/8 inch or more, shall be reinforced as follows: Eight ground ends on each side of the crinkle stripes shall be drawn in so that two ends are weaving as one (eight ends weaving as four). The stripe shall run lengthwise in the bedspreads.

3.7.1.2 Color and colorfastness. The cloth for type I bedspreads shall be either bleached white or of alternating bleached and yarn-dyed colored stripes. The colored stripes shall be the crinkled warp yarns and shall be of the color as specified (see 6.2). The colored stripes shall have good colorfastness to laundering, light and bleaching when tested in accordance with 4.4.

3.7.1.3 Identification marking. When specified (see 6.2), type I bedspreads shall be marked with the letters "U.S." in block style, one inch high, in a black marking medium, centered 18 inches from end on underside. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.4.

3.7.2 Type II - dimity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.7.2.1 Weave. Type II bedspreads shall be of any weave or combination of weaves that will produce a series of narrow, medium, and wide corded stripes which run lengthwise in the bedspread.

3.7.2.2 Color. The cloth for type II bedspreads shall be bleached white.

3.7.2.3 Marking for medical procurement. When specified (see 6.2), type II bedspreads shall be marked with black indelible ink with the stock number 1/4 inch in height and with a caduceus of appropriate size centered between the letters "U" and "S" in accordance with type I of MS 16686. The marking shall be placed midway between the two sides on the underside of the 3/4 inch hem. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.4.

3.7.3 Type III.- herringbone stripe.

3.7.3.1 Weave. Type III bedspreads shall be a combination weave consisting of alternating solid-color bands of narrow ribbed and chevron stripes (see fig. 1). The stripes shall run lengthwise in the bedspread.

3.7.3.2 Color and colorfastness. The cloth for type III bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.7.4 Type IV - corded.

3.7.4.1 Weave. Type IV bedspreads shall be of a plain weave construction with a pronounced warp-wise cord. The cord shall be a single corded cotton yarn not less than 1/16 inch in width. The cloth shall contain not less than 4 warp cords per inch.

3.7.4.2 Color and colorfastness. The cloth for type IV bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.7.4.3 Round corners. When specified (see 6.2), the round corners for style B bedspreads shall be made as follows: An arc 20 inches in radius shall be swung from the midpoint of the intersection of two straight lines of a 20-inch square, formed at the corners to be shaped round.

3.8 Nonfibrous material content. The starch and protein content, including cholorform-soluble and water-soluble materials shall not exceed 5.0 percent when tested as specified in 4.4.

3.9 Fiber identification. Bedspreads shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations under the Textile Fiber Products Identification Act.

3.10 Workmanship. The finished bedspreads shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. The first article sample submitted in accordance with 3.2 shall be inspected as specified in 4.3.2.1.1, 4.3.2.1.2 and 4.3.2.1.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Examination of the end item.

4.3.2.1 Visual examination. The defects found during this examination shall be classified in accordance with 4.3.2.1.1, 4.3.2.1.2, and 4.3.2.1.3. The fabric imperfections listed in table I are defined in Section I of FED-STD-4.

4.3.2.1.1 Examination of the end item. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the bedspread, in which case only the more serious defect will be counted. The sample unit shall be one bedspread. The lot size shall be expressed in units of one bedspread each. The acceptable quality level (AQL) shall be 2.5 major defects and 6.5 total defects per 100 units. The inspection level shall be level I.

Defects	Classification Major	Minor
Cut, hole, or tear (including selvage) - Any	X	
Smash - Any	X	
Floats or skips (other than those which are characteristic of the approved weave or weaves)		
Multiple	X	
Single, 3 inches or longer		X
Broken or missing yarns:		
Three or more adjoining, regardless of length	X	
Two, 9 inches or more missing	X	
Single, 3 inches or more missing or two, regardless of length		X
Hitch-back:		
Distorted area 1 square inch or more*	X	
Distorted area less than 1 square inch*		X
Slub, slug-more than three times the thickness of normal yarn		X
Slough-off, jerked in filling-three or more yarn thickness		X
Double pick or mispick - two or more yarns in shed or abrupt break in continuity of weave of pattern	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Open place, crack, pick-out or starting mark - any full width - any width opening at widest point more than two yarn thicknesses		X
Bowed or biased filling - two or more inches from horizontal at highest point		X
Tight or pulled yarn - clearly noticeable pucker or ridge		X
Wrong draw		X
Crease or wrinkle - embedded, cannot be removed by manual pressure		X
Odor, bad or objectionable	X	
Spot, stain, or streak:		
1 inch or more in combined length and width dimensions*	X	
less than 1 inch in combined length and width dimensions*		X
Heavy filling bar - any*		X
Light or fine filling bar - any	X	
Uneven weaving*		X
Color-off shade, not as specified	X	
Color - not uniform or shaded		X
Pattern or design - not as specified	X	
Untrimmed end or oversized knot protruding from face of bedspread		X
Temple cuts or abrasion marks	X	
Selvage (when edges are not hemmed):		
Rolled, folded, doubled, scalloped*, loose		X
Tight (puckered or wavey)*	X	
Cut or torn	X	
Tenter pin marks		X
WORKMANSHIP		
Seam and stitch type:		
Wrong seam type	X	
Wrong stitch type	X	
Stitch tension:		
Loose, resulting in a loosely secured seam		X
Tight, stitches break when normal strain is applied to the seam or stitching		X
Note: Puckering is evidence of tight tension. When puckering is evident seam shall be tested by exerting pull.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Stitches per inch:		
Less than 5 or more than 8 stitches per inch		X
Hem:		
Varies in width by more than 1/8 inch for type IV, style B		X
Varies in width by more than 1/4 inch for all other types		X
Badly twisted, pleated, or puckered		X
Needle chews	X	
Stitching less than 1/16 or more than 1/8 inch from the turned edge		X
Omitted on one or both sides where there is no woven selvage	X	
Omitted on either end	X	
Corners not square cut or rounded as specified		X
Open seam:		
Due to broken thread or broken stitch	X	
Due to skipped stitches or run-off		X
Raw edge:		
Any length not securely caught in stitching of hem		X
Note: Raw edge not securely caught in stitching shall be classified as an open seam.		
Identification marking (when required):		
Missing, incomplete, incorrect, wrong color, illegible, or misplaced	X	
Characters or design not as specified	X	
Dimensions not as specified	X	
Method of application not as specified	X	

*Clearly visible at normal inspection distance (approximately 3 feet).

4.3.2.1.2 Dimensional Examination. The sample unit shall be one finished bedspread. The lot size shall be expressed in units of one bedspread. The AQL shall be 2.5 defects per 100 units. The sample size shall be in accordance with inspection level S-3. The bedspreads shall be examined for the defects listed below. The same type of defect shall be counted no more than once in each bedspread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Length less than specified after laundering (see Table I).
Length uneven by more than 1 1/2 inches.
Width less than specified after laundering (see Table I).
Width uneven by more than 1 inch.
Hem width less than specified (see 3.4.2).
Turnunder less than specified (see 3.4.2).

4.3.2.1.3 Seconds. Second quality bedspreads shall be considered for acceptance at a reduction from contract price as stipulated in the Invitation for Bid (see 6.2). Seconds shall not exceed ten (10) percent of the total contract quantity. Seconds shall be presented to the Government separated from regular, first quality lots, and they shall be clearly designated as seconds on the shipping and inspection documents. There shall be no marking within such a lot that would show it to be second quality. Second quality lots shall be examined as specified for first quality bedspreads in 4.3.2.1.1 and 4.3.2.1.2, except that the first two minor defects in any one bedspread, as classified under 4.3.2.1.1, shall be disregarded. Second quality bedspreads shall meet all physical and chemical tests specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling; bulging or distortion of container.
Content	Number of items per container is more or less than required. Name, type, style and size on the package not as specified on container.

4.4 Testing of the end item. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in table III shall be followed. The physical and chemical values specified in section 3 apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The sample unit shall be one full bedspread for determination of weight and size after laundering and two yards full width of the cloth for all other tests. The lot size shall be expressed in units of one bedspread each. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample size shall be as specified in table II.

Table II.

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and up	5

Table III. Test methods

Characteristics	Requirement	Test method
Yarn identification	3.3.1.1 and 3.3.1.2	1200 and 1500 1/
Fiber content	3.3.1.2	4.4.1 1/
Size after laundering	Table I	5550 2/
Weight per bedspread	Table I	3/
Yarns per inch	Table I	5050
Breaking strength	Table I	5100 4/
Nonfibrous materials	3.8	2611
Weave	3.7	Visual 6/
Colorfastness to:		
Light	3.7	5660 5/
Laundering	3.7	5612 5/
Bleaching	3.7	5600 5/

1/ Unless otherwise specified, a supplier's certificate of compliance shall be accepted for this characteristic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

2/ Except the test specimen shall be one full bedspread and a commercial type mangler shall be used for pressing. The average of three measurements taken from the full width and length directions, respectively, shall be reported.
3/ One full bedspread shall be weighed and the results reported to the nearest 0.1 ounce. The weight shall be recorded prior to the laundering test and shall be obtained on a nonconditioned basis.
4/ Front jaws shall be centered on ground threads.
5/ Applicable only for bedspreads containing dyed yarn or colored design or insignia.
6/ One determination per unit with result reported as "pass" or "fail".

4.4.1 Fiber content for the blended fabric. The blended fabric shall contain the specified fiber percentages when tested in accordance with test method 20A-1959T (chemical method No. 4-59.5 percent sulfuric acid test) listed in the Technical Manual of the American Association of Textile Chemists and Colorists (see 2.2). Two specimens shall be tested from each sample unit.

4.4.1.1 Calculations. When the weights of both the original sample and residue have been found, the fiber content percentages on a conditioned basis shall be calculated by the following formula and shall be reported to the nearest 0.1 percent:

Percentage of cotton fiber (based on dryweight) $c = \frac{R\ (100)}{DW}$

Percentage of rayon fiber (based on dryweight) $v = 100 - c$

Percentage of corrected (regain) cotton fiber $CW = \frac{c\ (100)}{100 - 0.075}$

Percentage of corrected (regain) rayon fiber $VW = \frac{v\ (100)}{100 - 0.110}$

Percentage of cotton on conditioned basis $C = \frac{CW\ (100)}{CW + VW}$

Percentage of rayon on conditioned basis $V = 100 - CW$

Where:
R = Weight of residue (ovendry)
DW = Weight of original specimen (ovendry)
c = percentage of cotton (ovendry)
v = percentage of rayon (ovendry)
CW = corrected (regain) cotton
VW = corrected (regain) rayon
C = percentage of cotton on conditioned basis
V = percentage of rayon on conditioned basis

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging for types I, II and III bedspreads. Each bedspread neatly folded to approximate dimensions of 14 by 23 inches shall be placed in a properly fitted polyethylene bag. The polyethylene film for the bag shall be not less than 0.00125 inch thickness (± 20% tolerance). All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape. Alternatively, the polyethylene bag may be the tuck-in overlap type, heat seal closure not required.

5.1.1.2 Unit packaging for type IV bedspreads. Each size 1, 2 and 3 bedspreads shall be neatly folded to an approximate dimension of 11 by 18 inches; each size 4 bedspread shall be folded to an approximate dimension of 9 by 22 inches. Each folded bedspread shall be placed in a properly fitted polyethylene bag of not less than 0.00125 inch thickness (± 20% tolerance). All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape. Alternatively, the polyethylene bag may be the tuck-in overlap type, heat seal closure not required.

5.1.1.3 Standard packaging (civil agencies). Four identical bedspreads, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be stacked flat, with each bedspread reversed end to end, and completely wrapped in 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with a 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, or with cotton tape or twine.

5.1.1.3.1 Special packaging. When specified (see 6.2), six bedspreads without individual wrapping in polyethylene bags, may be folded to approximate dimensions of 14 by 23 inches for types I, II, and III bedspreads, 11 by 18 inches for type IV, sizes 1, 2 and 3 bedspreads and 9 by 22 inches for type IV, size 4 bedspreads. The bedspreads shall be stacked flat, with each bedspread reversed end to end and completely wrapped in 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-286. The wrap shall be secured with a 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Bedspreads shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A.

5.2.1.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, and size only, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be packed in the quantity as specified in table IV, within a snug-fitting shipping container conforming to style SFF-L, grade V3c or V3s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-B-636. Each shipping container shall be closed, waterproofed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.1.2 Type III bedspreads. Bedspreads, packaged as specified in 5.1.1.1, shall be packed in the quantity as specified in table IV, within a shipping container, assembled, closed and reinforced conforming to class weather resistant, size 3A of MIL-B-17757.

5.2.2 Level B.

5.2.2.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, and size only, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be packed in the quantity as specified in table IV, within a snug fitting shipping container conforming to style SFF-L, type CF, class domestic, variety SW, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to CF, class domestic, variety SW, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

5.2.2.2 Type III bedspreads. Bedspreads shall be packed in the quantity as specified in table IV within a shipping container conforming to class domestic, size 3A of MIL-B-17757, except that the bursting strength for the shipping container shall be 275 p.s.i. and the bursting strength for the fiberboard liner shall be 200 p.s.i. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Bedspreads shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face; or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Stock number
Nomenclature
Type, size, color and style (when applicable)
Quantity

Table IV. Number of items in shipping containers

Type	Size	Total number of items in each shipping container
I	63 by 97	32
	72 by 97	24
	72 by 106	24
II	81 by 103	24
III	56 by 88	30
	63 by 106	24
	72 by 106	24
IV	63 by 103	24
	76 by 103	20
	76 by 113	20
	90 by 113	16

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Bedspreads covered by this specification are intended for use by the Department of Defense, Medical Departments of the Armed Services, and General Services Administration. The following types are used by the agencies:

(a) Type I (General Services Administration)
(b) Type II (Medical)
(c) Type III (Navy) and (Air Force)
(d) Type IV (General Services Administration)

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification
(b) Type, style and size required (see 1.2, Table I, 3.4 and 3.6)
(c) Whether first article sample is required (see 3.2)
(d) Whether all cotton bedspreads shall be specified (see 3.3.1)
(e) Design required (see 3.5)
(f) Colors required (see 3.7.1.2, 3.7.3.2, and 3.7.4.2)
(g) Whether type I bedspreads shall be bleached white or bleached with colored stripes (see 3.7.1.2)
(h) When required, the marking for type I or II bedspreads (see 3.7.1.3 or 3.7.2.3)
(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
(j) When special packaging is required (see 5.1.1.3.1)
(k) Discount from unit price for seconds (see 4.3.2.1.3)

Note: In the preparation of the contract or order, it must be noted that the supplier has the option of submitting either an all cotton or a cotton/rayon blend bedspread as specified in 3.3.1, except that the bedspreads for Defense Medical shall be all cotton.

6.3 Samples. For access to samples of the end item, address the procuring office issuing the invitation for bids (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

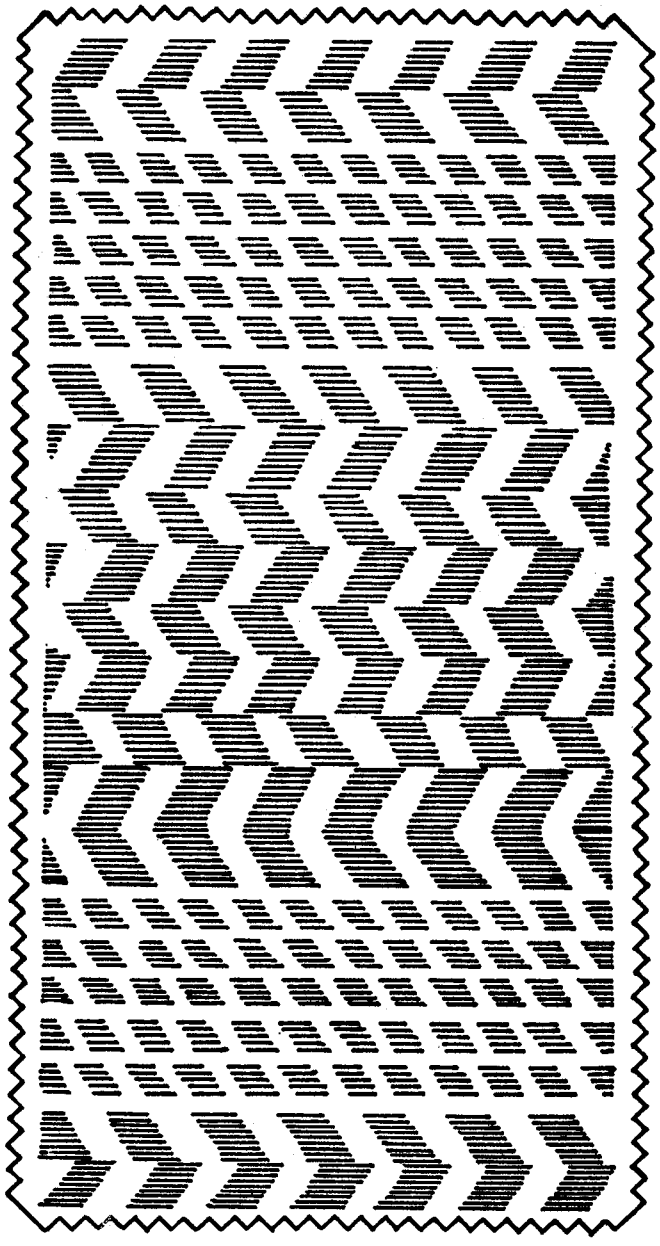


FIGURE 1. Diagram of ground weave for type III bedspread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:
Navy - SA
Air Force - 82

Review activities:
Navy - MS
Air Force - 82

User activities:
Navy - MS, YD

Preparing Activity:
Navy - SA

CIVIL AGENCIES INTEREST:
HEW
COM - NBS
VA
GSA-FSS

Project No. 7210-0095

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein. Price cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.