DDD-B-151G
November 8, 1974
SUPERSEDING
DDD-B-151F
October 8, 1970

FEDERAL SPECIFICATION

BEDSPREAD, COTTON OR COTTON/RAYON BLEND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use by all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a cotton or a cotton/rayon blend bedspread.

1.2 Classification. Bedspreads shall be of the following types, styles, and sizes as specified in Table I (see 6.2).

Type I - Crinkle
  Sizes 1, 3, 4

Type II - Dimity

Type III - Herringbone stripe
  Sizes 1, 2, 3

Type IV - Corded
  Style A
  Style B
  Sizes 1, 2, 3, 4, 5

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

Federal Standards:

FED-STD-4 - Glossary of Fabric Imperfections
FED-STD-123 - Marking for Domestic Shipment (Civilian Agencies)
FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-B-17757 - Boxes, Fiberboard, Corrugated (Modular Sizes)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MS-16686 - Medical Services Symbol

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

RULES AND REGULATIONS UNDER THE TEXTILE FIBER PRODUCTS IDENTIFICATION ACT

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D. C. 20580.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

TECHNICAL MANUAL AND YEAR BOOK OF AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

(Application for copies should be addressed to AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, N.C. 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Standard sample. The finished bedspread shall match the standard sample for shade, design and pattern, and shall be equal or better than the standard sample in all characteristics for which the standard sample is referenced (see 6.3). When a commercial design is selected, the approved sample shall, for the contract, become the standard for the characteristics for which it has been approved.

3.2 First article approval. If specified by the contract or order (see 6.2), one bedspread shall be submitted and subjected to the inspection requirements set forth in 4.2.

3.3 Materials.

3.3.1 Bedspreads. The bespreads shall be either all cotton or a blend of cotton/rayon as specified in 3.3.1.1 or 3.3.1.2 (see 6.2). NOTE: Bedspreads for Defense Medical procurements shall be all cotton (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements

Type	Size of finished bedspread (after laundering) (minimum) (inches)	Weight of finished bedspread (minimum) (ounces)	Yarns/Inch (minimum)		Breaking strength (minimum) (pounds)	
			Warp	Filling	Warp	Filling
I Crinkle						
Size 1	63 by 97	24.0	72 in plain ground 62 in crinkle stripe	62	50	50
Size 3	72 by 97	27.0	72 in plain ground 62 in crinkle stripe	62	50	50
Size 4	72 by 106	29.0	72 in plain ground 62 in crinkle stripe	62	50	50
II Dimity	81 by 103	32.5	70	60	75	45
III Herringbone stripe 1/						
Size 1	56 by 88	23.0	68	38	80	50
Size 2	63 by 106	31.0	68	38	80	50
Size 3	72 by 106	35.0	68	38	80	50
IV Corded Style A Bedspreads with four square cut corners			Including the cotton cords			
Size 1	63 by 103	38.0	45	30	35	25
Size 2	76 by 103	46.0	45	30	35	25
Size 3	76 by 113	49.0	45	30	35	25
Size 4	90 by 113	57.0	45	30	35	25
Size 5	56 by 88	28.0	45	30	35	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements (cont'd)

Type	Size of finished bedspread (after laundering) (minimum) (inches)	Weight of finished bedspread (minimum) (ounces)	Yarns/Inch (minimum) Warp	Filling	Breaking strength (minimum) (pounds) Warp	Filling
IV Corded (cont'd) Style B Bedspreads with two square cut corners at one end, and two round corners at the opposite end			Including the cotton cords			
Size 1	63 by 103	37.0	45	30	35	25
Size 2	76 by 103	45.0	45	30	35	25
Size 3	76 by 113	48.0	45	30	35	25
Size 4	90 by 113	56.0	45	30	35	25
Size 5	56 by 88	27.0	45	30	35	25

1/ The herringbone stripe shall consist of solid color bands of narrow ribbed and chevron stripes.

3.3.1.1 Bedspreads, cotton. The yarn for the bedspreads shall be made from cotton which has been carded, drawn and spun into singles yarn for both warp and filling. The bedspreads shall meet the requirements specified in Table I when tested as specified in 4.4.

3.3.1.2 Bedspreads, cotton/rayon blend. The yarn for the bedspreads, except for the cords for type IV bedspreads which shall be all cotton, shall consist of a blend of 50 percent cotton, as specified in 3.3.1.1, and 50 percent high wet-strength modulus type rayon, with a tolerance of plus or minus 5.0 percent for fiber content on a conditioned basis when tested as specified in 4.4.1. The bedspreads shall meet all requirements specified in Table I when tested as specified in 4.4.

3.3.2 Thread. The thread used for hemming shall be 3 ply, ticket No. 40, conforming to type IA2 and IA3 of V-T-276. The color of the thread shall match the color of the basic material. The dyed thread shall show good colorfastness to laundering, light, and bleaching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.4 Construction. The bedspread shall be fabricated from one piece of fabric that has straight woven selvages with the ends of the bedspread cut parallel to the filling yarns. The ends of the bedspread shall be hemmed. As an alternate, the bedspreads may be fabricated with the sides of the bedspreads cut parallel to the warp yarns. The four corners shall be square cut, except for type IV bedspreads, which shall have either four square cut corners, or two square cut corners at one end, and two rounded corners at the opposite end (see Table I and 6.2). The ends and sides of the bedspread shall be hemmed as specified in 3.4.2.

3.4.1 Stitches, seams, and stitching. The stitches, seams, and stitching types shall conform to FED-STD-751. Thread breaks shall be secured by stitching back of break not less than 1/2 inch.

3.4.2 Hems. The finished hems for the four square cut corner bedspreads shall be not less than 3/4 nor more than 1 inch wide, with the raw edges turned under not less than 1/4 inch, using stitching type EFb-1. The finished hems for bedspreads with two square cut corners at one end and two round corners at the opposite end shall be not less than 5/16 nor more than 7/16 inch wide, with the raw edges turned under not less than 3/16 inch, using stitching type EFb-1. All hems shall be stitched with not less than 5, nor more than 8 stitches per inch, using stitch type 301. The stitching shall be 1/16 to 1/8 inch from the turned edge. Bedspreads furnished with selvage sides need not be side hemmed.

3.5 Design. Unless otherwise specified in the contract or order (see 6.2), selected commercial designs shall be furnished for the bedspreads.

3.6 Sizes. Bedspreads shall be furnished in the sizes specified in Table I (see 6.2).

3.7 Weave and finish. Bedspreads may be treated with a no press finish.

3.7.1 Type I - Crinkle.

3.7.1.1 Weave. Type I bedspreads shall be of any weave or combination of weaves that will produce an alternate crinkle stripe and smooth stripe in the finished bedspreads. The ground ends, adjacent to all crinkle stripes which measure 3/8 inch or more, shall be reinforced as follows: Eight ground ends on each side of the crinkle stripes shall be drawn in so that two ends are weaving as one (eight ends weaving as four). The stripe shall run lengthwise in the bedspreads.

3.7.1.2 Color and colorfastness.- The cloth for type I bedspreads shall be either bleached white or of alternating bleached and yarn-dyed colored stripes. The colored stripes shall be the crinkled warp yarns and shall be of the color as specified (see 6.2). The colored stripes shall have good colorfastness to laundering, light and bleaching when tested in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.7.1.3 Identification marking. When specified (see 6.2), type I bedspreads shall be marked with the letters "U.S." in block style, one inch high, in a black marking medium, centered 18 inches from one end on underside. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.4.

3.7.2 Type II - Dimity.

3.7.2.1 Weave. Type II bedspreads shall be of any weave or combination of weaves that will produce a series of narrow, medium, and wide corded stripes which run lengthwise in the bedspread.

3.7.2.2 Color. The color for type II bedspreads shall be bleached white.

3.7.2.3 Marking for medical procurement. When specified (see 6.2), type II bedspreads shall be marked with black indelible ink with the stock number 1/4 inch in height and with a caduceus of appropriate size centered between the letters "U" and "S" in accordance with type I of MS-16686. The marking shall be centered between the two sides on the underside of the 3/4 inch hem. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.4.

3.7.3 Type III - Herringbone stripe.

3.7.3.1 Weave. Type III bedspreads shall be a combination weave consisting of alternating solid-color bands of narrow ribbed and chevron stripes (see Figure 1). The stripes shall run lengthwise in the bedspread.

3.7.3.2 Color and colorfastness. The cloth for type III bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.7.4 Type IV - Corded.

3.7.4.1 Weave. Type IV bedspreads shall be of a plain weave construction with a pronounced warp-wise cord. The cord shall be a single corded cotton yarn not less than 1/16 inch in width. The cloth shall contain not less than 4 warp cords per inch.

3.7.4.2 Color and colorfastness. The cloth for type IV bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering and light when tested in accordance with 4.4.

3.7.4.3 Round corners. When specified (see 6.2), the round corners for style B bedspreads shall be made as follows: An arc 20 inches in radius shall be swung from the midpoint of the intersection of two straight lines of a 20-inch square, formed at the corners to be shaped round.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.8 Nonfibrous material content. The starch and protein content, including chloroform-soluble and water-soluble materials shall not exceed 5.0 percent when tested as specified in 4.4.

3.9 Fiber identification. Each bedspread shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations Under the Textile Fiber Products Identification Act.

3.10 Workmanship. The finished bedspreads shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.3.2.1.1, 4.3.2.1.2 and 4.3.2.1.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Examination of the end item.

4.3.2.1 Visual examination. The defects found during this examination shall be classified in accordance with 4.3.2.1.1, 4.3.2.1.2, and 4.3.2.1.3. The fabric imperfections listed in 4.3.2.1.1 are defined in Section I of FED-STD-4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4.3.2.1.1 Examination of the end item. The bedspreads shall be examined on the face side only. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the bedspread, in which case only the more serious defect will be counted. The sample unit shall be one bedspread. The lot size shall be expressed in units of one bedspread each. The acceptable quality level (AQL) shall be 2.5 major defects and 6.5 total defects per 100 units. The inspection level shall be level I of MIL-STD-105.

Defect	Classification	
	Major	Minor
Cut, hole, or tear (including selvage) - Any	X	
Smash - Any	X	
Floats or skips (other than those which are characteristic of the approved weave or weaves):		
Multiple	X	
Single, 3 inches or longer		X
Broken or missing yarns:		
Three or more contiguous regardless of length	X	
Two contiguous 9 inches or more missing	X	
Single, 3 inches or more missing or two, less than 9 inches		X
Hitch-back:		
Distorted area 1 square inch or more*	X	
Distorted area less than 1 square inch*		X
Knots exceeding the "E" limit shown on Sears Fabric Defect Scales**		X
Slubs exceeding the "G" limit shown on Sears Fabric Defect Scales**		X
Slough-off, jerked in filling - three or more yarn thickness		X
Double pick or mispick - two or more yarns in shed or abrupt break in continuity of weave pattern	X	
Open place, crack, pick-out or starting mark - any full width more than two yarn thicknesses at widest point		X
Bowed or biased filling - two or more inches from horizontal at highest point		X
Tight or pulled yarn - clearly noticeable pucker or ridge		X
Wrong harness draw		X
Crease or wrinkle - embedded, cannot be removed by manual pressure		X
Spot, stain, or streak:		
1 inch or more in combined length and width dimensions*	X	
Less than 1 inch in combined length and width dimensions*		X
Heavy filling bar - any*		X
Light or fine filling bar - any	X	
Uneven weaving*		X
Color not as specified	X	
Color - not uniform or shaded		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
Pattern or design - not as specified	X	
Loose yarn or untrimmed end protruding from face of bedspread		X
Temple cuts or abrasion marks	X	
Selvage (when edges are not hemmed):		
Rolled, folded, doubled, scalloped*, loose		X
Tight (puckered or wavey)*	X	
Cut or torn	X	
Tenter pin or tenter marks		X
WORKMANSHIP		
Seam and stitch type:		
Wrong seam type	X	
Wrong stitch type	X	
Stitch tension:		
Loose, resulting in a loosely secured seam		X
Tight, stitches break when normal strain is applied to the seam or stitching		X
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull.		
Stitches per inch:		
Less than 5 or more than 8 stitches per inch		X
Hem:		
Varies in width by more than 1/8 inch for type IV, style B		X
Varies in width by more than 1/4 inch for all other types		X
Badly twisted, pleated, or puckered		X
Needle chews	X	
Stitching less than 1/16 or more than 1/8 inch from the turned edge		X
Any required hem omitted	X	
Corners not square cut or rounded as specified		X
Open seam:		
Due to broken thread or broken stitch	X	
Due to skipped stitches or run-off		X
Raw edge not securely caught in stitching shall be classified as an open seam		
Identification marking (when required):		
Missing, incomplete, incorrect, wrong color, illegible, or misplaced		X
Characters or design not as specified		X
Dimensions not as specified		X
Method of application not as specified		X

*Clearly visible at normal inspection distance (approximately 3 feet).
**See 6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Dimensional examination. The sample unit shall be one finished bedspread. The lot size shall be expressed in units of one bedspread. The AQL shall be 2.5 defects per 100 units. The sample size shall be in accordance with inspection level S-3. The bedspreads shall be examined for the defects listed below. The same type of defect shall be counted no more than once in each bedspread.

Length uneven by more than 1-1/2 inches.
Width uneven by more than 1 inch.
Hem width less than specified (see 3.4.2).
Turnunder less than specified (see 3.4.2).

4.3.2.1.3 Seconds. Second quality bedspreads shall be considered for acceptance at a reduction from contract price as stipulated in the Invitation for Bid (see 6.2). Seconds shall not exceed ten (10) percent of the total contract quantity. Seconds shall be presented to the Government separated from regular, first quality lots, and they shall be clearly designated as seconds on the shipping and inspection documents. There shall be no marking within such a lot that would show it to be second quality. Second quality lots shall be examined as specified for first quality bedspreads in 4.3.2.1.1 and 4.3.2.1.2, except that the first two minor defects in any one bedspread, as classified under 4.3.2.1.1, shall be disregarded. Second quality bedspreads shall meet all physical and chemical tests specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine whether packaging, packing and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, polyethylene bags improperly sealed; bulged or distorted container. Alternative polyethylene bags not provided with tuck or reverse flap.
Content	Number of items per container is more or less than required. Name, type, style and size on the package not as specified on container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4.4 Testing of the end item. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in Table III shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The sample unit shall be one full bedspread for determination of weight and shrinkage and two yards full width of the cloth for all other tests. The lot size shall be expressed in units of one bedspread each. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample size shall be as specified in Table II.

Table II.

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and up	5

Table III. Test methods

Characteristic	Requirement	Test method
Yarn identification	3.3.1.1 and 3.3.1.2	1200 and 1500 1/
Fiber content	3.3.1.2	4.4.1 1/
Size after laundering	Table I	5550 2/
Weight per bedspread	Table I	3/
Yarns per inch	Table I	5050
Breaking strength	Table I	5100 4/
Nonfibrous materials	3.8	2611
Weave	3.7	Visual 6/
Colorfastness to:		
Light	3.7	5660 5/
Laundering	3.7	5612 5/
Bleaching	3.7	5600 5/

1/ Unless otherwise specified, a supplier's certificate of compliance shall be accepted for this characteristic.

2/ Except the test specimens shall be one full bedspread and a commercial type mangler shall be used for pressing. The average of three measurements taken from the full width and length directions, respectively, shall be reported.

3/ One full bedspread shall be weighed and the results reported to the nearest 0.1 ounce. The weight shall be recorded prior to the laundering test and shall be obtained on a nonconditioned basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4/ Front jaws shall be centered on ground threads.

5/ Not applicable to undyed bedspreads.

6/ One determination per unit with result reported as "pass" or "fail."

4.4.1 Fiber content for the blended fabric. The blended fabric shall contain the specified fiber percentages when tested in accordance with test method 20A-1971 (chemical method No. 4-59.5 percent sulfuric acid test) listed in the Technical Manual of the American Association of Textile Chemists and Colorists (see 2.2). Two specimens shall be tested from each sample unit.

4.4.1.1 Calculations. When the weights of both the original sample and residue have been found, the fiber content percentages on a conditioned basis shall be calculated by the following formula and shall be reported to the nearest 0.1 percent:

Percentage of cotton fiber (based on dryweight) $c = \frac{R\ (100)}{DW}$

Percentage of rayon fiber (based on dryweight) $v = 100 - c$

Percentage of corrected (regain) cotton fiber $CW = \frac{c\ (100)}{100 - 0.075}$

Percentage of corrected (regain) rayon fiber $VW = \frac{v\ (100)}{100 - 0.110}$

Percentage of cotton on conditioned basis $C = \frac{CW\ (100)}{CW + VW}$

Percentage of rayon on conditioned basis $V = 100 - CW$

Where:
R = Weight of residue (ovendry)
DW = Weight of original specimen (ovendry)
c = Percentage of cotton (ovendry)
v = Percentage of rayon (ovendry)
CW = Corrected (regain) cotton
VW = Corrected (regain) rayon
C = Percentage of cotton on conditioned basis
V = Percentage of rayon on conditioned basis

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.1.1.1 Unit packaging for types I, II and III bedspreads. Each bedspread neatly folded to approximate dimensions of 14 by 23 inches shall be placed in a properly fitted polyethylene bag. The polyethylene film for the bag shall be 0.0012 inch thickness (± 25% tolerance). All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape. Alternatively, the polyethylene bag may be the tuck-in overlap type, heat seal closure not required.

5.1.1.2 Unit packaging for type IV bedspreads. Each bedspread, size 1, 2, 3, and 5, shall be neatly folded to an approximate dimension of 11 by 18 inches; each size 4 bedspread shall be folded to an approximate dimension of 9 by 22 inches. Each folded bedspread shall be placed in a properly fitted polyethylene bag of 0.0012 inch thickness (± 25% tolerance). All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape. Alternatively, the polyethylene bag may be the tuck-in overlap type, heat seal closure not required.

5.1.2 Level B.

5.1.2.1 Unit packaging. Each bedspread shall be folded and packaged as specified in 5.1.1.1, 5.1.1.2, or wrapped in commercial grade kraft paper.

5.1.2.2 Intermediate packaging. Four (4) bedspreads packaged as specified in 5.1.2.1 shall be stacked and completely wrapped with commercial grade kraft paper. The wrap shall be secured with tape or twine to prevent accidental opening.

5.1.2.3 Special packaging. When specified (see 6.2), six bedspreads of like description shall be folded as specified in 5.1.1.1 and 5.1.1.2, stacked and wrapped as specified in 5.1.2.2.

5.1.3 Level C (Commercial Packaging). Bedspreads shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table IV. Number of items in shipping containers

Type	Size	Total number of items in each shipping container
I	1 (63 by 97)	32
	3 (72 by 97)	24
	4 (72 by 106)	24
II	81 by 103	24
III	1 (56 by 88)	30
	2 (63 by 106)	24
	3 (72 by 106)	24
IV	1 (63 by 103)	24
	2 (76 by 103)	20
	3 (76 by 113)	20
	4 (90 by 113)	16
	5 (56 by 88)	30

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A.

5.2.1.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, color and size only, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a snug-fitting shipping container conforming to style SFF-L, grade V3c or V3s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-F-320. Each shipping container shall be closed, waterproofed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.1.2 Type III bedspreads. Bedspreads, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a shipping container, assembled, closed and reinforced conforming to class weather-resistant, size 3A of MIL-B-17757.

5.2.2 Level B.

5.2.2.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, color and size only, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a snug-fitting shipping container conforming to style SFF-L, type CF, class domestic, variety SW, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-F-320. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.2.2.2 Type III bedspreads. Bedspreads shall be packed in the quantity as specified in Table IV within a shipping container conforming to class domestic, size 3A of MIL-B-17757, except that the bursting strength for the shipping container shall be 275 p.s.i. and the bursting strength for the fiberboard liner shall be 200 p.s.i. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

5.2.3 Level C (Commercial Packing). Bedspreads, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face; or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Stock Number
Nomenclature
Type, size, color and style (when applicable)
Quantity

6. NOTES

6.1 Intended use. Bedspreads covered by this specification are intended for use by the Department of Defense, Medical Departments of the Armed Services, and General Services Administration. The following types are used by the agencies:

(a) Type I (General Services Administration)
(b) Type II (Medical)
(c) Type III (Navy) and (Air Force)
(d) Type IV (General Services Administration) (Navy) and (Air Force)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and size required (see 1.2, Table I, 3.4 and 3.6).
(c) Whether first article sample is required (see 3.2).
(d) Whether all cotton bedspreads shall be specified (see 3.3.1).
(e) Design required (see 3.5).
(f) Colors required (see 3.7.1.2, 3.7.3.2, and 3.7.4.2).
(g) Whether type I bedspreads shall be bleached white or bleached with colored stripes (see 3.7.1.2).
(h) When required, the marking for type I or II bedspreads (see 3.7.1.3 or 3.7.2.3).
(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(j) When special packaging is required (see 5.1.2.3).
(k) Discount from unit price for seconds (see 4.3.2.1.3).
(l) Quantities required (see 5.2.3).
(m) Marking document required (see 5.3).

NOTE: In the preparation of the contract or order, it must be noted that the supplier has the option of submitting either an all cotton or a cotton/rayon blend bedspread as specified in 3.3.1, except that the bedspreads for Defense Medical shall be all cotton.

6.3 Samples. For access to samples of the end item, address the procuring office issuing the invitation for bids (see 3.1).

6.4 Sears Fabric Defect Scales. "Fabric Defect Replica Kit" available from Sears Roebuck and Company, Dept. 769, 925 South Homan Avenue, Chicago, Illinois 60607.

Military custodians:
Navy - SA
Air Force - 82

Review activities:
Navy - MS
Air Force - 82
DSA - DM

User activity:
Navy - YD

Preparing activity:
Navy - SA

Civil agencies interest:
HEW
VA
GSA-FSS

Project No. 7210-0179

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

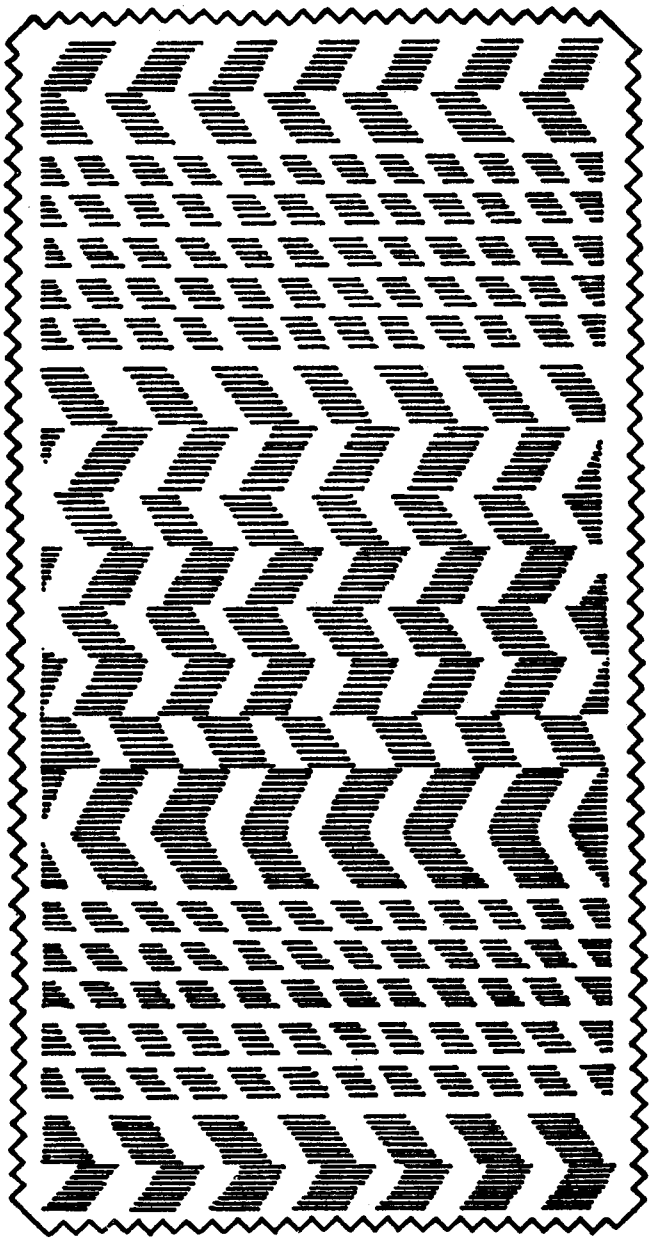


FIGURE 1. Diagram of ground weave for type III bedspread.

Orders for this publication are to be placed with ini-
stration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain copies and other documents referenced herein. Price (cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

DDD-B-151G; Bedspread, Cotton or Cotton/Rayon Blend

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

FOLD

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.