DDD-B-151H
October 21, 1981
SUPERSEDING
DDD-B-151G
November 8, 1974

FEDERAL SPECIFICATION

BEDSPREAD, COTTON, COTTON/RAYON, COTTON/POLYESTER OR POLYESTER/RAYON BLEND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a cotton, cotton/rayon, cotton/polyester, or polyester/rayon blend bedspread.

1.2 Classification. Bedspreads shall be of the following types, styles, and sizes as specified in Table I (see 6.2).

Type I - Crinkle
  Sizes 3, 4

Type II - Dimity

Type III - Herringbone stripe
  Sizes 1, 2, 3

Type IV - Corded
  Style A
  Style B
  Sizes 1, 2, 3, 4, 5

Type V - Corded
  Style A
  Style B
  Sizes 1, 2, 3, 4, 5

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

V-T-276 - Thread, Cotton
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

Federal Standards:

FED-STD-4 - Glossary of Fabric Imperfections
FED-STD-123 - Marking for Shipment (Civil Agencies)
FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

(Activities outside the Federal Government may obtain copies of Federal specifications, standards and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications, standards and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; San Francisco; Los Angeles; and Seattle, WA.

(Federal Government activities may obtain copies of Federal specifications, standards, commercial item descriptions and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specifications:

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548 - Thread, Polyester, Cotton-Covered

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MS 16686 - Medical Services Symbol

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:33Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

RULES AND REGULATIONS UNDER THE TEXTILE FIBER PRODUCTS IDENTIFICATION ACT

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D. C. 20580.)

TECHNICAL MANUAL AND YEAR BOOK OF AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

(Application for copies should be addressed to AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, N.C. 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Standard sample. The finished bedspread shall match the standard sample for shade, design and pattern, and shall be equal or better than the standard sample in all characteristics for which the standard sample is referenced (see 6.3). When a commercial design is selected, the approved sample shall, for the contract, become the standard for the characteristics for which it has been approved.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials. (see 6.5)

3.3.1 Bedspreads. The bedspreads shall be either all cotton, a blend of cotton/rayon, cotton/polyester, or polyester/rayon as specified in 3.3.1.1 through 3.3.1.4 (see 6.2). NOTE: Bedspreads for Defense Medical procurements shall be all cotton (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.3.1.1 Bedspreads, cotton. The yarn for the bedspreads shall be made from cotton which has been carded, drawn and spun into singles yarn for both warp and filling. The bedspreads shall meet the requirements specified in Table I when tested as specified in 4.5.

3.3.1.2 Bedspreads, cotton/rayon blend. The yarn for the bedspreads, except for the cords for type IV bedspreads which shall be all cotton, shall consist of a blend of 50 percent cotton, as specified in 3.3.1.1, and 50 percent high wet-strength modulus type rayon, with a tolerance of plus or minus 5.0 percent for fiber content on a conditioned basis when tested as specified in 4.5.1. The bedspreads shall meet all requirements specified in Table I when tested as specified in 4.5.

3.3.1.3 Bedspreads cotton/polyester blend. The yarn for the Type IV bedspreads shall consist of a blend of cotton, as specified in 3.3.1.1 and up to 50 percent polyethylene glycol terephthalate with a tolerance of plus or minus 5.0 percent for fiber content on a conditioned basis when tested as specified in 4.4.2. The bedspreads shall meet all requirements specified in Table I when tested as specified in 4.5.

3.3.1.4 Bedspreads polyester/rayon blend. The yarn for the Type V bedspreads shall consist of a blend of 75 percent polyester and 25 percent rayon with a tolerance of plus or minus 5.0 percent for either fiber component on a conditioned basis when tested as specified in 4.5.2. The bedspreads shall meet all requirements in Table I when tested as specified in 4.5.

3.3.2 Physical requirements. The finished cloth shall conform to the requirements shown in Table I when tested as specified in 4.5.

Table I. Physical requirements

Type	Size of finished bedspread (after laundering) (minimum) (inches)	Weight of finished bedspread (minimum) (ounces)	Yarns/Inch (minimum)		Breaking strength (minimum) (pounds)	
			Warp	Filling	Warp	Filling
I Crinkle						
Size 3	72 by 97	27.0	72 in plain ground 62 in crinkle stripe	62	50	50
Size 4	72 by 106	29.0	72 in plain ground 62 in crinkle stripe	62	50	50
II Dimity	81 by 103	32.5	70	50	75	45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements (cont'd)

Type	Size of finished bedspread (after laundering) (minimum) (inches)	Weight of finished bedspread (minimum) (ounces)	Yarns/Inch (minimum) Warp	Filling	Breaking strength (minimum) (pounds) Warp	Filling
III Herringbone stripe 1/						
Style 1	56 by 88	23.0	68	38	80	50
Size 2	63 by 106	31.0	68	38	80	50
Size 3	72 by 106	35.0	68	38	80	50
IV Corded Style A Bedspreads with four square cut corners			Including the cords			
Size 1	63 by 103	32.0	45	30	35	25
Size 2	76 by 103	39.0	45	30	35	25
Size 3	76 by 113	43.0	45	30	35	25
Size 4	90 by 113	51.0	45	30	35	25
Size 5	56 by 88	24.0	45	30	35	25
Style B Bedspreads with two square cut corners at one end, and two round corners at the opposite end			Including the cords			
Size 1	63 by 103	31.0	45	30	35	25
Size 2	76 by 103	38.0	45	30	35	25
Size 3	76 by 113	42.0	45	30	35	25
Size 4	90 by 113	50.0	45	30	35	25
Size 5	56 by 88	23.0	45	30	35	25
V Corded Style A Bedspreads sith four square cut corners			Including the cords			
Size 1	63 by 103	32.0	54	23	100	75
Size 2	76 by 103	39.0	54	23	100	75
Size 3	76 by 113	43.0	54	23	100	75
Size 4	90 by 113	51.0	54	23	100	75
Size 5	56 by 88	24.0	54	23	100	75

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements (cont'd)

Type	Size of finished bedspread (after laundering) (minimum) (inches)	Weight of finished bedspread (minimum) (ounces)	Yarns/Inch (minimum)		Breaking strength (minimum) (pounds)	
			Warp	Filling	Warp	Filling
V Corded (cont'd)						
Style B Bedspreads						
With two square cut corners at one end and two round corners at the opposite end			Including the cords			
Size 1	63 by 103	31.0	54	23	100	75
Size 2	76 by 103	38.0	54	23	100	75
Size 3	76 by 113	42.0	54	23	100	75
Size 4	90 by 113	50.0	54	23	100	75
Size 5	56 by 88	23.0	54	23	100	75

1/ The herringbone stripe shall consist of solid color bands of narrow ribbed and chevron stripes.

3.3.3 Thread

3.3.3.1 Thread cotton. The cotton thread used for hemming shall be 3 ply, ticket No. 40, conforming to Types IA2 and IA3 of V-T-276. The color of the thread shall match the color of the basic material. The dyed thread shall show good colorfastness to laundering, light and bleaching.

3.3.3.2 Polyester, cotton-covered. As an alternate to the cotton thread, all bedspreads manufactured of a blend material (see 3.3.1) may use a 3 ply polyester, cotton covered thread conforming to ticket No. 40 of MIL-T-43548. The color of the thread shall match the color of the basic material. The dyed thread shall show good colorfastness to laundering, light and bleaching.

3.4 Construction. The bedspreads shall be fabricated from one piece of fabric that has straight woven selvages with the ends and/or sides of the bedspread cut parallel to the filling yarns. The cut ends and/or sides of the bedspread shall be hemmed. As an alternate, the bedspreads may be fabricated with the sides and/or ends of the bedspread cut parallel to the warp yarns. The four corners shall be square cut, except for types IV and V bedspreads, which shall have either four square cut corners, or two square cut corners at one end, and two rounded corners at the opposite end (see Table I and 6.2). The ends and sides of the bedspread shall be hemmed as specified in 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.4.1 Stitches, seams, and stitching. The stitches, seams, and stitching types shall conform to FED-STD-751. Thread breaks shall be secured by stitching back of break not less than 1/2 inch.

3.4.2 Hems. The finished hems for the four square cut corner bedspreads shall be not less than 3/4 nor more than 1 inch wide, with the raw edges turned under not less than 1/4 inch, using stitching type EFB-1. The finished hems for bedspreads with two square cut corners at one end and two round corners at the opposite end shall be not less than 5/16 nor more than 7/16 inch wide, with the raw edges turned under not less than 3/16 inch, using stitching type EFB-1. All hems shall be stitched with not less than 5, nor more than 10 sitiches per inch, using stitch type 301. The stitching shall be 1/16 to 1/8 inch from the turned edge. Bedspreads furnished with selvage sides need not be side hemmed.

3.5 Design. Unless otherwise specified in the contract or order (see 6.2), selected commercial designs shall be furnished for the bedspreads.

3.6 Sizes. Bedspreads shall be furnished in the sizes specified in Table I (see 6.2).

3.7 Weave and finish. Bedspreads may be treated with a no press finish.

3.7.1 Type I - Crinkle.

3.7.1.1 Weave. Type 1 bedspreads shall be of any weave or combination of weaves that will produce an alternate crinkle stripe and smooth stripe in the finished bedspreads. The ground ends, adjacent to all crinkle stripes which measure 3/8 inch or more, shall be reinforced as follows: Eight ground ends on each side of the crinkle stripes shall be drawn in so that two ends are weaving as one (eight ends weaving as four). The stripe shall run lengthwise in the bedspreads.

3.7.1.2 Color and Colorfastness. The cloth for type I bedspreads shall be either bleached white or of alternating bleached and yarn-dyed colored stripes. The colored stripes shall be the crinkled warp yarns and shall be of the color as specified (see 6.2). The colored stripes shall have good colorfastness to laundering, light and bleaching when tested in accordance with 4.5.

3.7.1.3 Identification marking. When specified (see 6.2), type I bedspreads shall be marked with the letters "U.S." in block style, 1± 1/16 inch high, in a black marking medium, centered 16 to 18 inches from one end of underside. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.5.

3.7.2 Type II - Dimity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.7.2.1 Weave. Type II bedspreads shall be of any weave or combination of weaves that will produce a series of narrow, medium, and wide corded stripes which run lengthwise in the bedspread.

3.7.2.2 Color. The color for type II bedspreads shall be bleached white.

3.7.2.3 Marking for Medical Procurement. When specified (see 6.2), type II bedspreads shall be marked with black indelible ink with the stock number 1/4 inch in height and with a caduceus of appropriate size centered between the letters "U" and "S" in accordance with type I of MS-16686. The marking shall be centered between the two sides on the underside of the 3/4 inch hem. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.5.

3.7.3 Type III - Herringbone stripe.

3.7.3.1 Weave. Type III bedspreads shall be a combination weave consisting of alternating solid-color bands of narrow ribbed and chevron stripes (see Figure 1). The stripes shall run lengthwise in the bedspread.

3.7.3.2 Color and colorfastness. The cloth for type III bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.5.

3.7.4 Type IV and V - Corded.

3.7.4.1 Weave. Type IV and V bedspreads shall be of a plain weave construction with a pronounced cord. The cord shall be a single or two or more ply corded yarn not less than 1/16 inch in width. The cloth shall contain not less than 4 cords per inch.

3.7.4.2 Color and colorfastness. The cloth for type IV and V bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering and light when tested in accordance with 4.5.

3.7.4.3 Rounded corners. When specified (see 6.2), the round corners for style B bedspreads shall be made as follows: An arc 20 inches in radius shall be swung from the midpoint of the intersection of two straight lines of a 20-inch square, formed at the corners to be shaped round.

3.8 Nonfibrous material content. The starch and protein content, including chloroform-soluble and water-soluble materials shall not exceed 5.0 percent when tested as specified in 4.5.

3.9 Fiber identification. Each bedspread shall be labeled or ticketed for fiber content in accordance with the Rules and Regulations Under the Textile Fiber Products Identification Act.

3.10 Workmanship. The finished bedspreads shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2.1.1, 4.4.2.1.2 and 4.4.2.1.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be in accordance with MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item.

4.4.2.1 Visual examination. The defects found during this examination shall be classified in accordance with 4.4.2.1.1, 4.4.2.1.2, and 4.4.2.1.3. The fabric imperfections listed in 4.4.2.1.1 are defined in Section I of FED-STD-4.

4.4.2.1.1 Examination of the end item. The bedspreads shall be examined on the face side only. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the bedspread, in which case only the more serious defect will be counted. The sample unit shall be one bedspread. The lot size shall be expressed units of one bedspread each. The acceptable quality level (AQL) shall be 2.5 major defects and 6.5 total defects per 100 units. The inspection level shall be level I of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
Cut, hole, or tear (including selvage) - Any	X	
Smash - Any	X	
Floats or skips (other than those which are characteristic of the approved weave or weaves):		
Multiple	X	
Single, 3 inches or longer		X
Broken or missing yarns:		
Three or more contiguous regardless of length	X	
Two contiguous 9 inches or more missing	X	
Single, 3 inches or more missing or two, less than 9 inches		X
Hitch-back:		
Distorted area 1 square inch or more*	X	
Distorted area less than 1 square inch*		X
Knots exceeding the "E" limit shown on Sears Fabric Defect Scales**		X
Slubs exceeding the "G" limit shown on Sears Fabric Defect Scales**		X
Slough-off, jerked in filling - three or more yarn thickness		X
Double pick or mispick - two or more yarns in shed or abrupt break in continuity of weave pattern	X	
Open place, crack, pick-out or starting mark - any full width more than two yarn thicknesses at widest point		X
Bowed or biased filling - two or more inches from horizontal at highest point		X
Tight or pulled yarn - clearly noticeable pucker or ridge		X
Wrong harness draw		X
Crease or winkle - embedded, cannot be removed by manual pressure		X
Spot, stain, or streak:		
1 inch or more in combined length and width dimensions*	X	
Less than 1 inch in combined length and width dimensions*		X
Heavy filling bar - any*		X
Light or fine filling bar - any	X	
Uneven weaving*		X
Color not as specified	X	
Color - not uniform or shaded		X
Pattern or design - not as specified	X	
Loose yarn or untrimmed end protruding from face of bedspread		X
Temple cuts or abrasion marks	X	
Selvage (when edges are not hemmed):		
Rolled, folded, doubled, scalloped*, loose		X
Tight (puckered or wavy)*	X	
Cut or torn	X	
Tenter pin or tenter marks		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
WORKMANSHIP		
Seam and stitch type:		
Wrong seam type	X	
Wrong stitch type	X	
Stitch tension:		
Loose, resulting in a loosely secured seam		X
Tight, stitches break when normal strain is applied to the seam or stitching		X
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull.		
Stitches per inch:		
Less than 5 or more than 8 stitches per inch		X
Hem:		
Varies in width by more than 1/8 inch for type IV, style B		X
Varies in width by more than 1/4 inch for all other types		X
Badly twisted, pleated, or puckered		X
Needle chews	X	
Stitching less than 1/16 or more than 1/8 inch from the turned edge		X
Any required hem omitted	X	
Corners not square cut or rounded as specified		X
Open seam:		
Due to broken thread or broken stitch	X	
Due to skipped stitches or run-off		X
Raw edge not securely caught in stitching shall be classified as an open seam		
Identification marking (when required):		
Missing, incomplete, incorrect, wrong color, illegible, or misplaced		X
Characters or design not as specified		X
Dimensions not as specified		X
Method of application not as specified		X

*Clearly visible at normal inspection distance (approximately 3 feet).
**See 6.4.

4.4.2.1.2 Dimensional examination. The sample unit shall be one finished bedspread. The lot size shall be expressed in units of one bedspread. The AQL shall be 2.5 defects per 100 units. The sample size shall be in accordance with inspection level S-3. The bedspreads shall be examined for the defects listed below. The same type of defect shall be counted no more than once in each bedspread.

Source: https://assist.dla.mil Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Length uneven by more than 1-1/2 inches.
Width uneven by more than 1 inch.
Hem width less than specified (see 3.4.2).
Turnunder less than specified (see 3.4.2).

4.4.2.1.3 Seconds. Second quality bedspreads shall be considered for acceptance at a reduction from contract price as stipulated in the invitation for Bid (see 6.2). Seconds shall not exceed ten (10) percent of the total contract quantity. Seconds shall be presented to the Government separated from regular, first quality lots, and they shall be clearly designated as seconds on the shipping and inspection documents. There shall be no marking within such a lot that would show it to be second quality. Second quality lots shall be examined as specified for first quality bedspreads in 4.4.2.1.1 and 4.4.2.1.2, except that the first two minor defects in any one bedspread, as classified under 4.4.2.1.1, shall be disregarded. Second quality bedspreads shall meet all physical and chemical tests specified in 4.5.

4.3.3 Examination of preparation for delivery An examination shall be made to determine compliance with the requirements of Section 5. The sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of percent defective.

4.5 Testing of the end item The methods of testing specified in FED-STD-191, where applicable, and as listed in Table III shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The sample unit shall be one full bedspread for determination of weight and shrinkage and two yards full width of the cloth for all other tests. The lot size shall be expressed in units of one bedspread each. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample size shall be as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Table II

Lot Size	Sample Size
800 or less	2
801 thru 22,000	3
22,001 and up	5

Table III - Test methods

Characteristic	Requirement	Test method
Yarn identification	3.3.1.1	1200 1/
	3.3.1.2	1200 and 1500 1/
	3.3.1.3	1200 and 1600 1/
	3.3.1.4	1500 and 1600 1/
Fiber content	3.3.1.2	4.5.1 1/
	3.3.1.3 and 3.3.1.4	4.5.2 and 2100 1/
Size after laundering	Table I	5550 2/
Weight per bedspread	Table I	3/
Yarns per inch	Table I	5050
Breaking strength	Table I	5100 4/
Nonfibrous materials	3.8	2611
Weave	3.7	Visual 5/
Colorfastness to:		
Light	3.7	5660 6/
Laundering	3.7	5612 6/
Bleaching	3.7	5600 6/

1/ Unless otherwise specified, a supplier's certificate of compliance shall be accepted for this characteristic.

2/ Except the test specimens shall be one full bedspread and a commercial type mangler shall be used for pressing. The average of three measurements taken from the full width and length directions, respectively, shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3/ One full bedspread shall be weighed and the results reported to the nearest 0.1 ounce. The weight shall be recorded prior to the laundering test and shall be obtained in a nonconditioned basis.

4/ Front jaws shall be centered on ground threads.

5/ One determination per unit with result reported as "pass" or "fail."

6/ Not applicable to undyed bedspreads.

4.5.1 Fiber content for the cotton/rayon blend fabric. The cotton/rayon blend fabric shall contain the specified fiber percentages when tested in accordance with test method 20A-1971 (chemical method No. 4-59.5 percent sulfuric acid test) listed in the Technical Manual of the American Association of Textile Chemists and Colorists (see 2.2). Two specimens shall be tested from each sample unit.

4.5.1.1 Caluclations. When the weights of both the original sample and residue have been found, the fiber content percentages on a conditioned basis shall be calculated by the following formula and shall be reported to the nearest 0.1 percent:

Percentage of cotton fiber (based on dryweight) $c = \frac{R\ (100)}{DW}$

Percentage of rayon fiber (based on dryweight) $v = 100 - c$

Percentage of corrected (regain) cotton fiber $CW = \frac{c\ (100)}{100 - 0.075}$

Percentage of corrected (regain) rayon fiber $VW = \frac{v\ (100)}{100 - 0.110}$

Percentage of cotton on conditioned basis $C = \frac{CW\ (100)}{CW + VW}$

Percentage of rayon on conditioned basis $V = 100 - CW$

Where:
R = Weight of residue (ovendry)
DW = Weight of original specimen (ovendry)
c = Percentage of cotton (ovendry)
v = Percentage of rayon (ovendry)
CW = Corrected (regain) cotton
C = Percentage of cotton on conditioned basis
V = Percentage of rayon on conditioned basis

4.5.2 Fiber content for the cotton/polyester and polyester/rayon blend fabrics. The general procedure of method 2100 shall be followed and the fiber content percentage calculated as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

ight of dry residual fiber X 100 = percent polyester
ight of dry desized specimen

0 - percent polyester - percent cotton or rayon

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or Commercial specified (see 6.2).

5.1.1 Level A

5.1.1.1 Unit packaging for types I, II and III bedspreads. Each bedspread atly folded to approximate dimensions of 14 by 23 inches shall be placed a properly fitted polyethylene bag. The polyethylene film for the bag all be 0.0012 inch thickness (± 25% tolerance). All seams and closures all be heat sealed. A hole of not more than 1/4 inch in diameter shall made at one corner of each bag to allow the excess air within the bag escape. Alternatively, the polyethylene bag may be the tuck-in overlap pe, heat seal closure not required.

5.1.1.2 Unit packaging for type IV and V bedspreads. Each bedspread, size 1, 3, and 5, shall be neatly folded to an approximate dimension of 11 by 18 ches; each size 4 bedspread shall be folded to an approximate dimension by 22 inches. Each folded bedspread shall be placed in a properly d polyethylene bag of 0.0012 inch thickness (± 25% tolerance). All ams and closures shall be heat sealed. A hole of not more than 1/4 inch diameter shall be made at one corner of each bag to allow the excess air thin the bag to excape. Alternatively, the polyethylene bag may be the ck-in overlap type, heat sealed closure not required.

5.1.2 Level B.

5.1.2.1 Unit packaging. Each bedspread shall be folded and packaged as ecified in 5.1.1.1, 5.1.1.2, or wrapped in commercial grade Kraft paper.

5.1.2.2 Intermediate packaging. Four (4) bedspreads packaged as specified 5.1.2.1 shall be stacked and completely wrapped with commercial grade aft paper. The wrap shall be secured with tape or twine to prevent cidental opening.

5.1.2.3 Special packaging. When specified (see 6.2), six bedspreads of ke description shall be folded as specified in 5.1.1.1 and 5.1.1.2, acked and wrapped as specified in 5.1.2.2.

5.1.3 Level C (Commercial Packaging). Bedspreads shall be packaged to fford adequate protection against physical damage during shipment from the ntractor to the first receiving activity. The package and the quantity per ckage shall be the same as that normally used by the contractor for retail stribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A

5.2.1.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, color and size only, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a snug-fitting shipping container conforming to class weather resistant, style SFF-L, type CF, variety SW, grade V3c of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-F-320. Each shipping container shall be closed, waterproofed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.1.2 Type III bedspreads. Bedspreads, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a shipping container, assembled, closed and reinforced conforming to class weather-resistant, size 3A of MIL-B-17757.

5.2.2 Level B.

5.2.2.1 Types I, II, and IV bedspreads. Bedspreads of one type, style, color and size only, packaged as specified in 5.1, shall be packed in the quantity as specified in Table IV, within a snug-fitting shipping container conforming to style SFF-L, type CF, class domestic, variety SW, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-F-320. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

5.2.2.2 Type III bedspreads. Bedspreads shall be packed in the quantity as specified in Table IV within a shipping container conforming to class domestic, size 3A of MIL-B-17757, except that the bursting strength for the shipping container shall be 275 p.s.i. and the bursting strength for the fiberboard liner shall be 200 p.s.i. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

Table IV. Number of items in shipping containers

Type	Size	Total number of items in each shipping container
I	3 (72 by 97)	24
	4 (72 by 106)	24
II	81 by 103	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Type	Size	Total number of items in each shipping container
III	1 (56 by 88)	30
	2 (63 by 106)	24
	3 (72 by 106)	24
IV and V	1 (63 by 103)	24
	2 (76 by 103)	20
	3 (76 by 113)	20
	4 (90 by 113)	16
	5 (56 by 88)	30

5.2.3 Level C (Commercial Packing). Bedspreads, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking

5.3.1 Civil agencies Marking shall be in accordance with FED-STD- No. 123.

5.3.2 Military agencies Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Bedspreads covered by this specification are intended for use by the Department of Defense, Medical Departments of the Armed Services, and General Services Administration. The following types are used by the agencies:

(a) Type I (General Services Administration)
(b) Type II (Medical)
(c) Type III (Navy) and (Air Force)
(d) Type IV (General Services Administration) (Navy) and (Air Force)

6.2 Ordering data Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and size required (see 1.2, Table I, 3.4 and 3.6).
(c) Whether first article sample is required (see 3.2).
(d) Whether all cotton bedspreads shall be specified (see 3.3.1).
(e) Design required (see 3.5).
(f) Colors required (see 3.7.1.2, 3.7.3.2, and 3.7.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(g) Whether type I bedspreads shall be bleached white or bleached with colored stripes (see 3.7.1.2).
(h) When required, the marking for type I or II bedspreads (see 3.7.1.3 or 3.7.2.3).
(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(j) Marking required (see 5.3).
(k) Discount from unit price for seconds (see 4.3.2.1.3).

NOTE: In the preparation of the contract or order, it must be noted that the supplier has the option of submitting either an all cotton or bedspreads composed of various material bands as specified in 3.3.1, except that the bedspreads for Defense Medical shall be all cotton.

6.3 Samples. For access to samples of the end item, address the procuring office issuing the invitation for bids (see 3.1).

6.4 Sears Fabric Defect Scales. Sears Fabric Defect Scales are available from Sears, Roebuck and Company, Department 769, "Fabric Defect Replica Kit", 925 South Homan Avenue, Chicago, Illinois 60607.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:33Z
Check the source to verify that this is the current version before use.

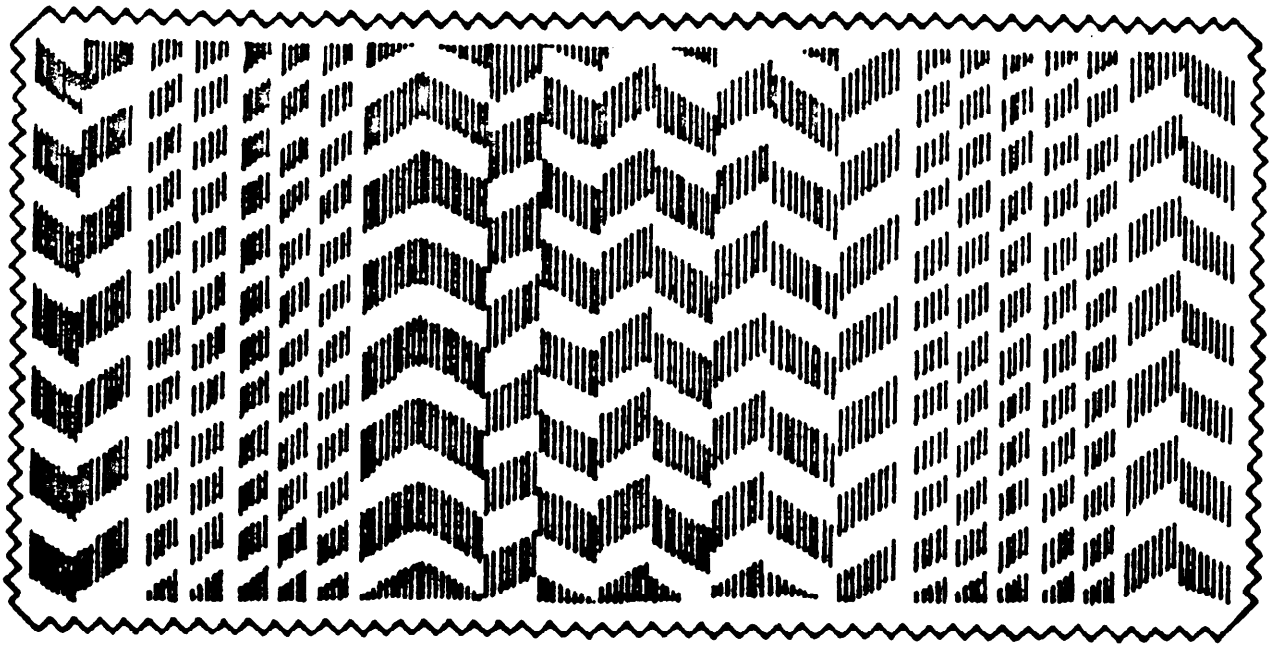


FIGURE 1. Diagram of ground weave for type III bedspread.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:33Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Navy - NU
Air Force - 99

Review Activities

Navy - MS
DLA - CT

User Activities

Navy - YD

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA-FSS
HSS
VA-OSS

PREPARING ACTIVITY:

Navy - NU

Project No. 7210-0242

Orders for this publication are to be placed with General Services Administration, acting as agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION –	4. TYPE OF ORGANIZATION *(Mark one)*
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:33Z
Check the source to verify that this is the current version before use.