DDD-C-48e
March 27, 1968
SUPERSEDING
Fed. Spec. DDD-C-48d
July 23, 1959

FEDERAL SPECIFICATION

CAP, OPERATING, SURGICAL, GREEN

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for the manufacture of cotton operating caps.

1.2 Classification.

1.2.1 Classes and sizes. The caps shall be of one type in two classes in the size or sizes as specified (see 6.2):

Class 1 - Cap, operating, surgical, green.
Size - Medium, large, extra large.
Class 2 - Cap, operating, surgical, green, adjustable.
Size - Adjustable (6-3/4 through 7-1/2).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
CCC-C-444 - Cloth, Cotton, Jean, (bleached).
CCC-T-191 - Textile Test Methods.
DDD-L-20 - Label; for Clothing, Equipage, and Tentage, (General Use).
DDD-T-86 - Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed).
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MS-16686	-	Medical Services Symbol.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids, or request for proposal, shall apply.

Textile Fiber Products Identification Act (March 3, 1960).

(Copies may be obtained free of charge from the Federal Trade Commission, Washington, D. C. 20402.)

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill., 60606.)

National Motor Freight Classification Rules.

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N. W., Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 Guide sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. When specified (see 6.2), before production is commenced, a finished cap made in accordance with this specification shall be submitted to the contracting officer or his authorized representative for inspection as specified in 4.2.1. The approval of the preproduction sample authorized the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the product items.

3.3 Materials.

3.3.1 Basic fabric, classes 1 and 2 caps. The basic fabric for classes 1 and 2 caps shall be cotton jean, conforming to requirements of CCC-C-444, except that it shall be dyed Grayish Green Shade No. 180 to match the standard sample and shall show colorfastness to combined laundering and bleaching, perspiration and light, equal to or better than the standard sample when tested as specified in 4.2.2.2. When no standard sample is available, the dyed cloth shall show "good" fastness to laundering and bleaching, perspiration, and light. The dyed and finished cloth shall show no more labile sulfur than shown by the standard sample when tested as specified in 4.2.2.2. When no standard sample is available there shall be a minimum of staining of the test paper when tested as specified in 4.2.2.2.

3.3.2 Tape. The tying tape for the class 2 cap shall be 1/2 to 5/8 inch wide conforming to type I of DDD-T-86, and shall be dyed Gray Green Shade AN, Cable No. 66055.

3.3.2.1 Colorfastness. The tape shall show color fastness to laundering and bleaching equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" fastness to laundering and bleaching.

3.3.3 Thread. The thread for seaming and stitching shall be cotton, conforming to type IA3, ticket No. 50, 3-ply and 70, 2-ply of V-T-276 and shall be dyed Gray Green Shade AN, Cable No. 66055.

3.3.3.1 Colorfastness. The dyed thread shall show fastness to laundering and bleaching equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to laundering and bleaching.

3.3.4 Label. Each cap shall have a combination identification and size label conforming to type
2 I or IV, class 4 of DDD-L-20. In addition, when specified (see 6.2), the class 1 cap shall include

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:31Z
Check the source to verify that this is the current version before use.

a type IV, class 9 Medical Services Symbol design in accordance with type I of MS-16686. The "U" and "S" of the symbol shall be 1/4 inch high with the caduceus of appropriate size. Each cap procured by civil agencies shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations under the Textile Fiber Products Identification Act (see 2.2). The fastness to laundering requirements of DDD-L-20 shall apply.

3.4 Design.

3.4.1 Class 1 cap. The class 1 cap is cylindrical in form and consists of a flat circular crown joined to a side body. The cap has a hem on the bottom (see fig. 1).

3.4.2 Class 2 cap. The class 2 cap is constructed of two pieces of material consisting of one-piece oval crown and a band-like piece of fabric (folded double) which goes around the head to form the side body. The fold of the band is at the bottom of the cap and the open end is at the back. The finished ends shall overlap to permit adjustment of the head size. Each cap has two tying tapes for closing the back opening, permitting a snug fit. The band is higher on the sides than at the front and back (see figs. 2 and 3).

3.5 Figures. The figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall govern.

3.6 Patterns.

3.6.1 Class 1 cap. For the class 1 cap, standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembling and shall not be altered in any way. The patterns provide an allowance of 1/4 inch for joining side body to crown, 1/2 inch for double-lapped, double-stitched seam, and 3/8 inch for the hem turnunder.

3.6.1.1 List of pattern parts. The component parts of the class 1 cap shall be cut from the specified material in accordance with the number of parts required as shown in table I.

TABLE I. Pattern parts - class 1 cap

Material	Nomenclature of parts	Cut parts
Cotton jean cloth	Crown Side body	1 1

3.6.2 Class 2 cap. Patterns for the class 2 cap shall be processed by the supplier and shall comply with the finished measurements in table V.

3.6.2.1 List of pattern parts. The component parts of the class 2 cap (see fig. 3) shall be cut from specified material in accordance with the number of parts required as shown in table II.

TABLE II. Pattern parts - class 2 cap

Material	Nomenclature of parts	Cut parts
Cotton jean cloth	Crown Side body (cut double with fold on bottom edge)	1 1

3.7 Construction.

3.7.1 Stitches, seams, and stitching. The stitch, seam, and stitching types specified in table III shall conform to Fed. Std. No. 751. When two or more seam or stitching types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the garment. Double needle stitching shall be 3/16 to 1/4 inch gage with the outer row of stitching 1/16 inch from turned edge on outside of cap. Seam allowance shall be maintained with seams properly sewn so that no raw edges, run-offs, twists, pleats, or puckers shall result.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

3.7.3 Thread breaks and ends of seams. The ends of all seams and stitchings produced with 301 stitching type, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks, on all stitch types shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming may be repaired using a 301 stitch type.

3.8 Manufacturing operations requirements. The caps shall be manufactured in accordance with operations requirements specified in table III. The supplier is not required to follow the exact sequence of operations listed.

3.8.1 Marking. Parts of the cap shall be marked to insure a uniform shade and size. Any method of marking may be used except:

(a) Corrosive metal fastening devices.
(b) Adhesive type tickets which leave an impression or traces of paper or adhesive on material upon removal of ticket.

TABLE III. Manufacturing operations requirements

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
1.	Cutting - classes 1 and 2 caps.					
	a. Cut caps so that the finished cap conforms to finished measurements shown in tables IV or V, as applicable					
	b. Cut the component parts of the cap from one piece of the basic material.					
	c. Cut the crown piece with center (front to back) in the direction of the warp or filling.					
	d. Cut the side body in single ply in the warp direction. The cut piece of the class 2 cap shall be folded in half lengthwise with the fold becoming the bottom of the cap (see fig. 3).					
	e. Cut tie tapes for the class 2 cap of sufficient length so that when positioned on the back edges of cap, each tape shall finish 12 ± 1/4 inches long (see operation 11).					
2.	Replacement of damaged parts					
	a. Replace, at time of cutting, any part containing a hold, smash, multiple float or loose slub.					
	b. Replace any part damaged during manufacturing process, by needle chews, tears, cuts, holes, burns, mends, or large exposed drill holes.					
3.	Marking (see 3.8.1).					
	a. Mark, ticket, or bundle all component parts to insure correct size and a uniform shade in the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements (cont'd.)

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
	Class 1 cap					
4.	Labeling.					
	a. Caduceus (when specified): (1.) Apply caduceus to inside of cap, on the hem, 1 ± 1/4 inch to the right of the back seam.					
	b. Combination label: (1.) Position the type I combination label on the cap, before hemming, to finish no larger than width of hem, adjacent to the caduceus, or when specified for the caduceus. The label shall be stitched on all four sides.	301	LSbj-1	12-16	50-3	50-3
	or					
	(2.) Apply type IV combination label in same position as specified in (1.) above.					
5.	Join ends of side body.					
	Finished appearance. The ends of the side body, when joined, shall start and finish evenly without pleats, puckers, or raw edges.					
	a. Join ends of the side body with a double lapped and double stitched seam.	301 or 401	LSc-2 LSc-2	12-16 12-16	50-3 50-3	50-3 70-2
6.	Hem bottom edge of side body.					
	Finished appearance. The hem shall be uniform in width without pleats, puckers, or raw edges. The joining seams of the side body and hem, when turned up, shall be superimposed (1/4 inch tolerance). Finished hem shall measure 1-3/4 ± 1/8 inches wide.					
	a.. Turn in the raw edge at bottom of cap, fold back and stitch 1/16 to 1/8 inch from edge.	301	EFb-1	12-16	50-3	50-3
7.	Join side body to crown.					
	a. Position top edge of side body even with edge of crown and join parts with a stitch and overedge stitch. The stitch and overedge stitching shall be performed in one operation. The bight of the overedge stitching shall be 3/16 inch gage.	515 or 516	SSa-2	12-16	50-3 (chain stitching) 70-2 (overedge stitching)	70-2 70-2
		519 517 or 518	SSa-2	12-16	50-3 (lock stitching) 70-2 (overedge stitching)	50-3 70-2

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:31Z
Check the source to verify that this is the currenversion before use.

TABLE III. Manufacturing operations requirements (cont'd.)

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
	Class 2 cap					
8.	Labeling.					
	a. Combination label: (1.) Position the type I combination label on the cap, before attaching side body to crown, to finish adjacent to the hem of opening at right side, close to bottom fold, and stitch on all four sides.	301	LSbj-1	12-16	50-3	50-3
	or					
	(2.) Apply type IV combination label in same position as specified in (1.) above.					
9.	Hem ends of side body.					
	Finished appearance. The ends of the side body, when hemmed, shall be uniform in width without pleats, puckers, or raw edges showing. The finished hem shall measure not less than 3/4 inch wide.					
	a. Fold side body in half lengthwise, turn back edges of each back opening, turning in the raw edges and stitch 1/16 to 1/8 inch from edge through hem and side body.	301	EFb-1	12-16	50-3	50-3
10.	Join side body to crown.					
	a. With left back of side body overlapped on right notch to notch (see fig. 2), and with top edges of side body even with edge of crown, join parts with a stitch and overedge stitch. The stitch and overedge stitching shall be performed in one operation. The bight of the overedge stitching shall be 3/16 inch gage.	515 or 516	SSa-2	12-16	50-3 (chain stitching)	50-3
					70-2 (overedge stitching)	70-2
		519 517 or 518	SSa-2	12-16	50-3 (lock stitching)	50-3
					70-2 (overedge stitching)	70-2
11.	Attach tie tapes.					
	a. With back left opening lapped over right, at bottom, position tie tapes at bottom edge, 2-1/2 ± 1/4 inches from outside edge of back opening (see fig. 2). Turn under one end of each tape and secure with a 3/8 to 1/2 inch bartack through tape and side body, catching the turned back portion of the tape. Tapes shall finish 12 ± 1/4 inches long.	Bartack		28 per bartack	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements (cont'd.)

No.	Requirements	Stitch type	Seam and stitching type	stitches per inch	Thread	
					Needle	Bobbin or looper
12.	Secure top of overlapped edge. a. Secure the left back edge of overlap 1/2 + 1/8 inch below crown seam, with 3/8 to 1/2 inch bartack, centered across hemmed end of overlap (see fig. 2). Classes 1 and 2 caps	Bartack		28 per bartack	50-3	50-3
13.	Clean caps. a. Remove all spots, stains, and shade tickets. b. Clip all thread ends and remove loose threads. c. Shade markings, when exposed on the outside, shall be removed.					

3.9 Finished measurements.

3.9.1 Class 1 cap. The finished measurements of the class 1 caps shall conform to table IV.

TABLE IV. Class 1 cap - finished measurements (in inches)

Size	Open end (side section) 1/2 circumference 1/	Height of cap (crown to bottom edge of side piece) 2/
Medium	11-3/4	6
Large	12	6
Extra large	12-1/2	6
Tolerance (±)	1/8	1/2

1/Open end - 1/2 circumference - Fold cap in half and measure across the bottom edge of side section, from folded edge to folded edge.

2/Height of cap - Measure height of side section from bottom of hem to top edge of side section.

3.9.2 Class 2 cap. The finished measurement of the class 2 caps shall conform to table V.

TABLE V. Class 2 cap - finished measurements

Key points	Dimensions (inches)
Length of crown	9-1/2
Width of crown	5-3/4
Height (front)	3-1/2
Height (back)	4
Height (sides)	5
Circumference of open end (unfastened)	26-3/4
Length of tie tapes	12
Tolerance (± on all measurements)	1/4

3.10 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Preproduction sample inspection. When specified, the preproduction sample submitted in accordance with 3.2 shall be inspected as specified in tables VII and VIII and 4.2.3.2, for compliance with design, workmanship, and dimensional requirements.

4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. All test reports shall contain the individual values utilized in expressing the final result.

4.2.2.1 Sampling for testing. Testing for characteristics listed in table VI will require a sample of 1/2 yard full width in addition to that specified in the subsidiary specification. The sampling plan of the subsidiary specification shall apply.

4.2.2.2 The method of testing specified in CCC-T-191, whenever applicable, and as listed in table VI, shall be followed. All requirements are applicable to the sample unit. When the data in the "number of determinations per sample unit" and the "results reported as" columns are not specified in table VI, they shall be as required by the referenced test method.

TABLE VI. Test methods

Component	Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as
Cotton jean cloth	Color	3.3.1	Visual	1	"Pass" or "fail"
	Colorfastness to:				
	-Combined laundering and bleaching	3.3.1	5605	1	--
	-Perspiration	3.3.1	5680	1	--
	-Light	3.3.1	5660	1	--
	Labile sulfur	3.3.1	2020	1	--

4.2.3 Examination of the end item. The classification of the defects found during the examination shall be in accordance with the defects listed in tables VII, VIII, and 4.2.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.3.3. The sample unit shall be one cap.

4.2.3.1 Classification of defect. All visual defects shall be classified as indicated below:

TABLE VII. General defects

Defect	Classification	
	Major	Minor
Material defects and workmanship damages:		
a. Any hole.	X	
b. Needle chew, scissor, or knife cut, tear or mend.	X	
c. Any weakening defect such as smash, multiple float or loose slub.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE VII. General defects (cont'd.)

Defect	Classification	
	Major	Minor
Shaded parts:		
a. Any outside part shaded.		X
Cleanness:		
a. Spot or stain on outside.		X
b. Shade stamping exposed on outside.		X
c. Thread ends not trimmed.		X
d. Two or more shade tickets not removed.		X
Component and assembly:		
a. Any component part or operation omitted.	X	
Cutting:		
a. Any component part not cut in conformance with directional lines on pattern.	X	
Seams and stitching:		
a. General:		
1. Any part of cap caught in any unrelated operation.		X
2. Seams twisted, puckered, or pleated (unless otherwise specified herein).		X
3. Ends of all stitching, when not caught in other seams or stitching, backtaked less than 1/4 inch.		X
4. Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break.		X
5. Continuous line of stitching overlapped less than 1/2 inch.		X
b. Gage of stitching:		
1. Unevenly gaged or various stitching not uniform.		X
2. Beyond width specified or varies more than 1/16 inch when no range is specified.		X
c. Open seams:		
-up to 1/4 inch inclusive.		X
-over 1/4 inch.	X	
NOTE: One or more broken or two or more continuous skipped or run-off stitches are considered an open seam. Double-stitched seams are considered open when either one or both sides of seams are open.		
d. Raw edges:		
1. On outside:		
-more than 1/8 inch but not more than 1/4 inch.		X
-more than 1/4 inch.	X	
2. On inside:		
-more than 1/4 inch, but not more than 1 inch.		X
-more than 1 inch.	X	
3. On overedges seam:		
-stitching omitted for a distance of more than 3 inches.		X
4. Raw edge protruding from folded edge on outside of double needle seam more than 1-1/2 inches (class 1 cap).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE VII. General defects (cont'd.)

Defect	Classification	
	Major	Minor
NOTE: Raw edges are classified as such only where they occur at places where edge is required to be turned under or over-edged. Raw edges not securely caught in stitching shall be classified as open seams.		
e. Run-offs (see classification of open seams).		
f. Seam and stitch types:		
1. Not specified seam or stitch type.		X
2. Looper thread of 401 stitch type finished on outside of cap.		X
g. Stitch tension:		
1. Loose tension, resulting in a loose seam.		X
2. Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.		
h. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching):		
1. Less than minimum specified by:		
-one or two stitches.		X
-three or more stitches.	X	
2. More than maximum specified.		X
Bartacks:		
a. Less than 3/8 inch or more than 1/2 inch long.		X

TABLE VIII. Detailed defects applicable to specific parts

Defect	Classification	
	Major	Minor
Outside of cap		
Crown (classes 1 and 2):		
a. Twisted, puckered, or pleated at joining to side body.		X
b. Center from front to back on bias because of incorrect joining to sides.		X
Side body (classes 1 and 2):		
a. Twisted, puckered, or pleated at joining to crown.		X
Back opening (class 2):		
a. Overlapped right over left.		X
b. Bartack securing overlap less than 3/8 inch or more than 5/8 inch below crown seam.		X
c. Bartack not across hemmed end of overlap.		X
Tie tapes (class 2):		
a. Not specified type.	X	
b. One or both omitted.	X	
c. End of one or both tapes insecurely bartacked.	X	
d. Turned back end of one or both tapes not caught in bartack.	X	
e. End(s) of tapes, positioned 1/4 inch or more from bottom edge of cap.		X
f. End(s) of tape more than 2-3/4 inches or less than 2-1/4 inches		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

Objectionable odor present.

TABLE VIII. Detailed defects applicable to specific parts (cont'd.)

Defect	Classification	
	Major	Minor
Tie tapes (class 2): (cont'd.)		
from back opening edges.		
Combination label (classes 1 and 2):		
a. On outside.	X	
b. Missing, incorrect, or illegible.	X	
c. Not stitched on all four sides (cloth label).		X
d. Not positioned as specified.		X
Caduceus (class 1, when specified):		
a. On outside.	X	
b. Missing, incorrect, or illegible.		X
c. Not positioned as specified.		X
Hems:		
a. Class 1 (at bottom edge):		
1. Uneven in width by more than 1/4 inch.		X
2. Less than 1-5/8 inches or more than 1-7/8 inches wide.		X
3. Back seam in hem turn-up not aligned with back seam in side body at top of hem by more than 1/4 inch.		X
4. Badly twisted, or top edge puckered or pleated in stitching.		X
b. Class 2 (back opening seam):		
1. Uneven in width by more tha 1/8 inch.		X
2. Less than 3/4 inch wide.		X
3. Badly twisted, or inner edge puckered or pleated in stitching.		X

4.2.3.2 Size measurements (see 3.9). Any measurement deviating from dimensions and tolerances specified in tables IV or V, as applicable, shall be scored as a size measurement defect.

4.2.3.3 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels, expressed in defects per hundred units (DHU) shall be as follows:

	AQL	Inspection level
For defects listed in tables VII and VIII.		II
Major	2.5	
Total	10.0	
For defects listed in 4.2.3.	4.0	S-2

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with the packaging, packing, and marking requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level shall be 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:31Z
Check the source to verify that this is the currentversion before use.

TABLE IX. Classification of preparation for delivery defects

Examine	Defects
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, open and noncontinuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number of intermediate packages per shipping container is more or less than required. Number of caps per intermediate package is more or less than required. 1/ Size shown on one or more caps not as specified on shipping container.

1/For this defect, one container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each cap shall be laid flat on its side with the back ties of the class 2 caps neatly placed along the side of the cap. Twenty-four (24) caps of one class and size only shall be evenly stacked and securely tied with cotton tape or twine to form a bundle. Each bundle shall be inserted into a snug-fitting polyethylene bag. The polyethylene bag shall be flat style, made from clear polyethylene film of 0.003 inch thickness (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape.

5.1.1.2 Intermediate packaging. Sixteen unit packages (384) of one class and size only packaged as specified in 5.1.1.1 shall be placed in a fiberboard intermediate container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 175 of PPP-B-636. Level A packages shall be placed flat one in length, two in width, and eight in depth. Inside dimensions of each container shall be 15 inches in length, 11-1/2 inches in width and 15 inches in depth. Box closure shall be effected with gummed paper tape, minimum 2 inches in width, conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. Caps shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Two intermediate fiberboard boxes (768 caps) of one class and size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat two in length, one in width and one in depth. Inside dimensions of each container shall approximate 23-3/4 inches in length, 15-1/2 inches in width and 15-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed, waterproofed, and reinforced with strapping or tape banding in accordance with the appendix of PPP-B-636. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Two intermediate fiberboard boxes (768 caps) of one class and size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat two in length, one in width and one in depth. Inside dimensions of each container shall approximate 23-3/4 inches in length, 15-1/2 inches in width and 15-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method II in the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same container.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C. Caps packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The containers shall comply with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, each unit, intermediate package and shipping container shall be marked in accordance with Fed. Std. No. 123 and with the markings specified in 5.3.2.1 and 5.3.2.2.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2.1 Labels, mixed sizes. Each shipping container packed with the mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5- by 4-inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

6. NOTES

6.1 Intended use. The surgical operating caps are intended for wear by surgical personnel of the Department of Defense (class 1 caps) and Public Health Service (class 2 caps).

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Class and size required (see 1.2).
(c) When preproduction sample is required (see 3.2).
(d) When stamping of caduceus is required (see 3.3.4).
(e) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples of the cap and shade samples of the material, address the procuring activity issuing the invitations for bid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.



FIGURE 1. Caps, Operating, Surgical, Green.

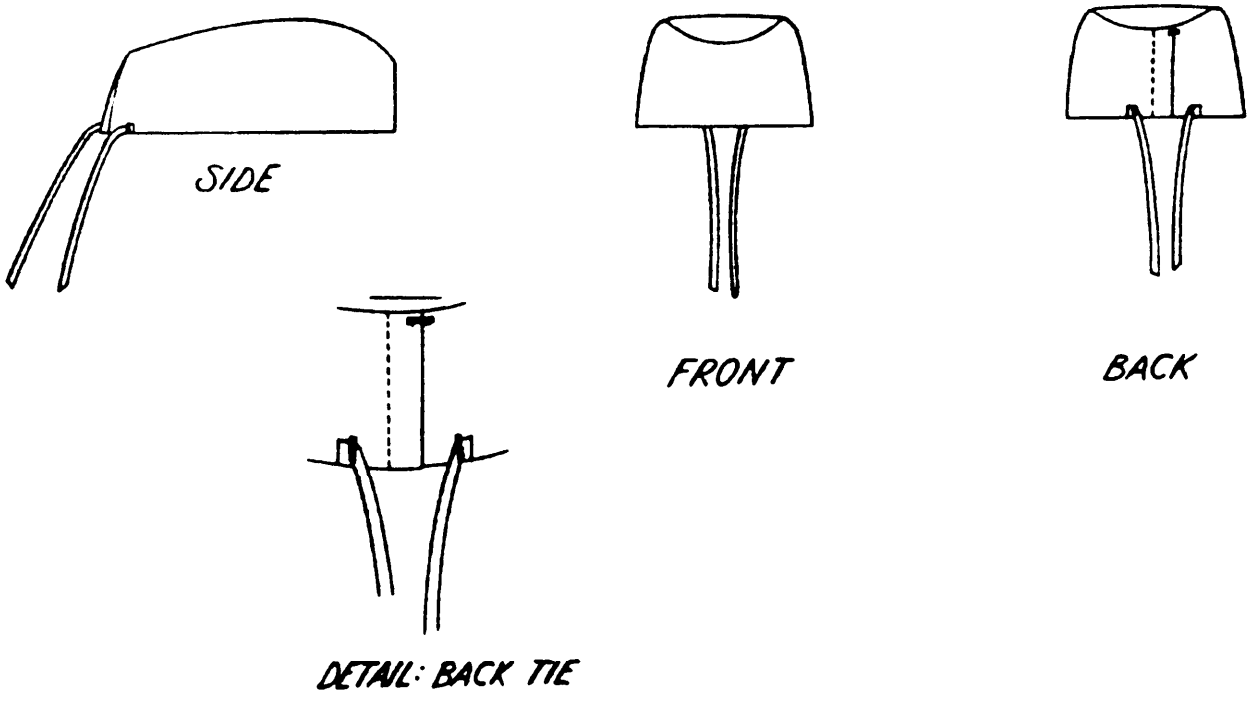


FIGURE 2. Caps, Operating, Surgical, Green, Adjustable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

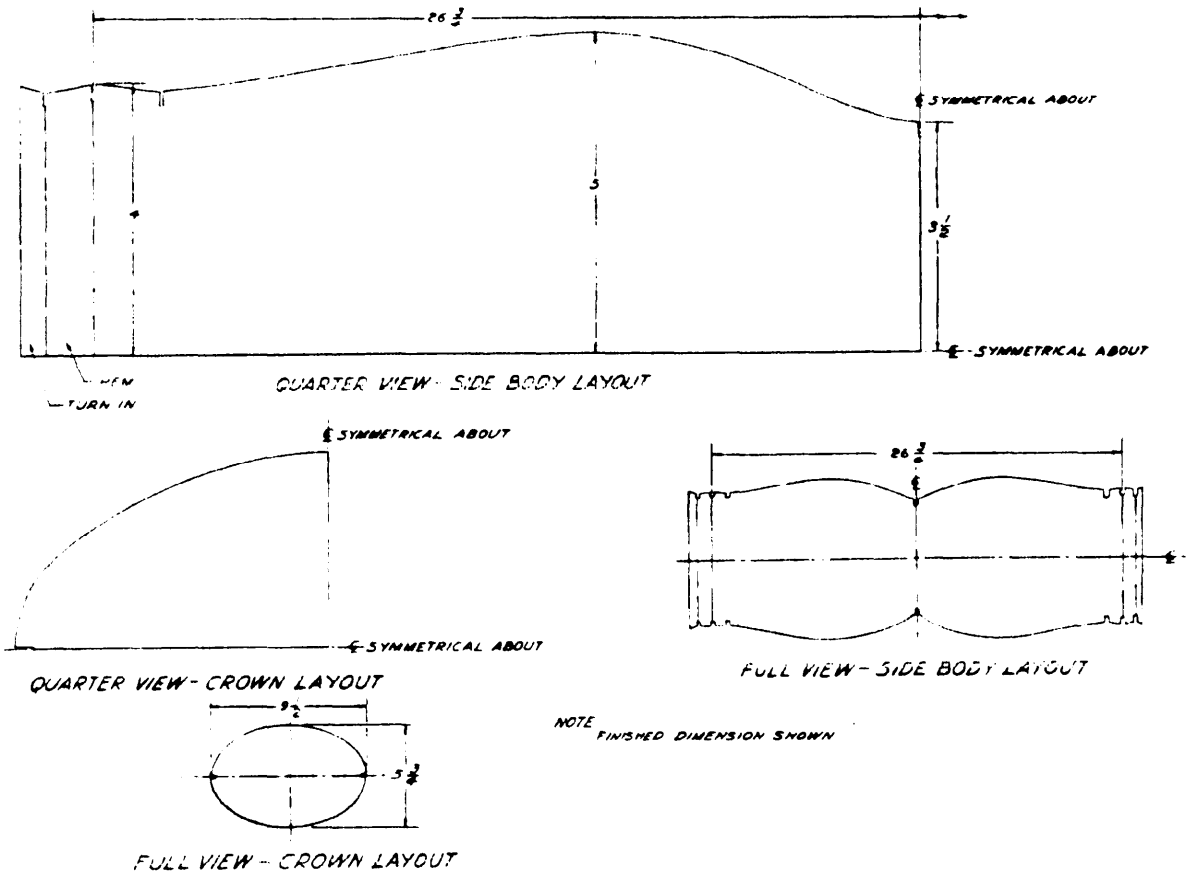


FIGURE 3. Caps, Operating, Surgical, Green, Adjustable; Pattern Layouts.

MILITARY CUSTODIANS:

Army - GL
Navy - MS
Air Force - 82

Review activities:

Army - MD
Navy - MS
Air Force - 03, 82
DSA-DM

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA-FSS
HEW-PHS
VA-DMS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:31Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION (Of submitter) | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4883, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:31Z
Check the source to verify that this is the currentversion before use.

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
Attn: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

PLATE NO. 15418 (BACK)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:31Z
Check the source to verify that this is the current version before use.