MILITARY SPECIFICATION SHEET

COUPLING ASSEMBLIES, QUICK-DISCONNECT, GENERAL PURPOSE, FOR SUBMINIATURE WAVEGUIDE FLANGES

This specification sheet forms a part of the latest issue of Military Specification MIL-C-39004.

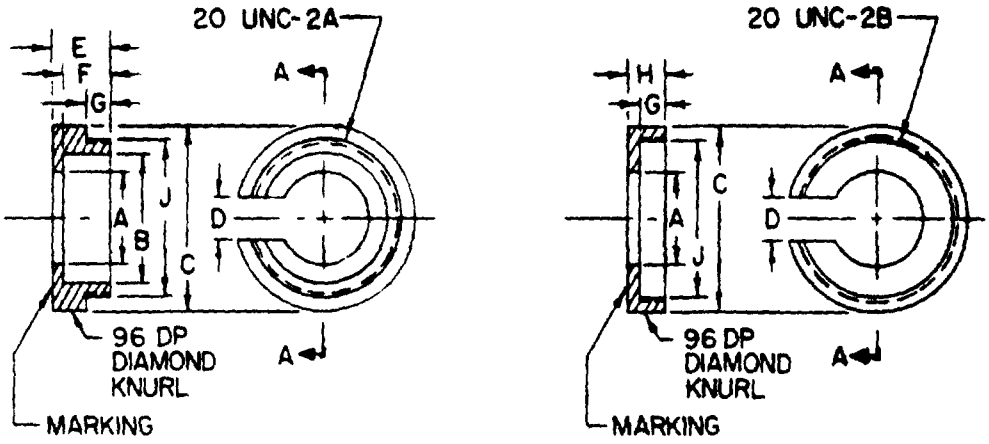


TABLE I - DIMENSIONS AND PART NUMBERS

Dimension	Dash No 001		Dash No 002		Dash No 003		Dash No 004		Dash No 005	
	in	MM	in	MM	in	MM	in	MM	in	MM
A	1 12	28 4	0 75	19 1	0.62	15 7	0 50	12 7	0 40	10 2
B	1 875	47.62	1.250	31 75	1 000	25 40	1 188	30 17	0 575	14 60
C	2 25	57 2	1 75	44 4	1 25	31 8	1 44	36 6	0 81	20 6
D	0 500	12 70	0 312	7 94	0.312	7 94	0 250	6 35	0 184	4.67
E	0 50	12 7	0 44	11 2	0.38	9 7	0 38	9 7	0 25	6.3
F	0 280	7 14	0 312	7 94	0 250	6 35	0 250	6 35	0 210	5 33
G	0 19	4 8	0 19	4 8	0 19	4 8	0 12	3 0	0 11	2 8
H	0 31	7 9	0.31	7 9	0.31	7.9	0 19	4 8	0 16	4 1
J	2 000	50.80	1 500	38.10	1.125	28 58	1 312	33 32	0 687	17.45

1 Unless otherwise specified, tolerances for all dimensions in Table I are as follows

a Two (0 00) place decimal inches ±0 05 in c One (0.0) place decimal millimeters ±1 3 MM

b Three (0 000) place decimal inches ±0 005 in d Two (0 00) place decimal millimeters ±0.13 MM

2. Metric dimensions for general information only and are based upon one inch=25.4 mm

Requirements:

Dimensions and configuration: See above Figure and Table I.

Design;

Type: Quick-disconnect coupling assemblies.
Material: Metallic (alloy specified in General Spec. MIL-C-39004)

Materials supplied with each coupling assembly: Two each applicable type alignment pins in accordance with dimensions specified in Table III.

Part number: Consists of the basic number of this specification sheet and a dash number taken from Table I. Example: M39004/1-001


Basic Document No.	Dash No. from Table I

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:07Z
Check the source to verify that this is the current version before use.

TABLE II - REFERENCE DATA

PART NUMBER	USED WITH FLANGE TYPE
M-39004/1-001	UG-419/U UG-541A/U
M-39004/1-002	UG-595/U UG-596A/U UG-1530/U
M-39004/1-003	UG-599/U UG-600/U
M-39004/1-004	UG-1521/U UG-1529/U
M-39004/1-005	UG-1522/U UG-1523/U UG-1524/U UG-1525/U UG-1526/U UG-1527/U UG-1528/U



TYPE I



TYPE II

TABLE III - ALIGNMENT PIN DIMENSIONS

Coupling Assmb. Part Number[1]	PIN TYPE	DIMENSION	INCHES MIN.	INCHES NOM.	INCHES MAX.	MILLIMETERS MIN.	MILLIMETERS MAX.	THREAD SIZE
M-39004/1-001	I	A	.220	.225	.230	5.59	5.84	
		B	.141	.144	.144	3.58	3.66	
	II	A	.282	.287	.292	7.16	7.42	6-32 UNC-2B
		B	.105	.110	.115	2.67	2.92	
		C	.141	.144	.144	3.58	3.66	
M-39004/1-002	I	A	.344	.349	.354	8.74	8.99	
		B	.113	.116	.116	2.87	2.95	
	II	A	.313	.318	.323	7.95	8.20	4-40 UNC-2B
		B	.167	.172	.177	4.24	4.50	
		C	.113	.116	.116	2.87	2.95	
M-39004/1-003	I	A	.344	.349	.354	8.74	8.99	
		B	.113	.116	.116	2.87	2.95	
	II	A	.266	.271	.276	6.76	7.01	4-40 UNC-2B
		B	.167	.172	.177	4.24	4.50	
		C	.113	.116	.116	2.87	2.95	
M-39004/1-004	II	A	.506	.511	.516	12.85	13.11	4-40 UNC-2B
		B	.248	.253	.258	6.30	6.55	
		C	.087	.089	.091	2.21	2.31	

[1] Two (2) each type alignment pins to be supplied with each coupling assembly as specified above in Table III.

Custodians:
Army - EL
Navy - Ships
AirForce - SEG

Reviewers:
Army - EL,MI, MU
Navy - Ships
Air Force -

Users:
Army - MO
Navy -

Preparing activity:
Navy - Ships
(Project 5985-0333)

Review/User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:07Z
Check the source to verify that this is the current version before use.