
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, (NONPOLARIZED, SINTERED SLU), ESTABLISHED RELIABILILTY, STYLE CSR91


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-39003.

FAILURE RATE LEVELS "M", "P" AND "R" ARE INACTIVE FOR NEW DESIGN AFTER 2 FEBRUARY, 1984.

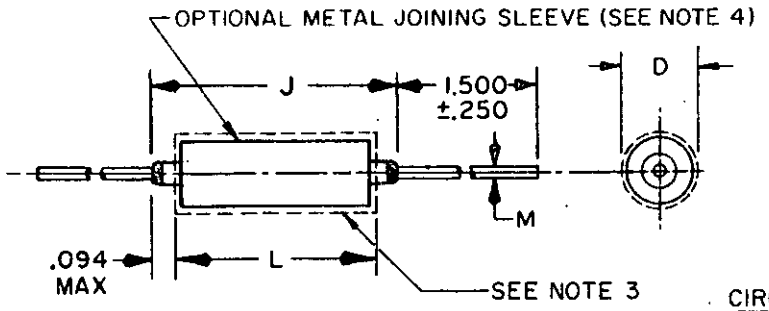

CIRCUIT DIAGRAM



Case size	Dimensions L ±.031	D +.010 -.015	M ±.0002	M max
W	.575	.161	.020	.750
X	.955	.207	.020	1.130
Y	1.350	.314	.025	1.525
Z	1.550	.376	.025	1.725

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.161	4.09	.955	24.26
.010	.25	.207	5.26	1.130	28.70
.015	.38	.250	6.35	1.350	34.29
.020	.51	.314	7.98	1.500	38.10
.025	.64	.376	9.55	1.525	38.74
.031	.79	.575	14.61	1.550	39.37
.094	2.39	.750	19.05	1.725	43.82

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. The case insulation shall extend .015 (.38 mm) minimum beyond each end. However, when a shrink-fitted insulation is used, it shall lap over the ends of the capacitor body.
4. Two style CSR13 capacitors placed "back-to-back" (negative terminal-to-negative terminal).
© 5. Lead length may be a minimum of 1-inch long for use in tape and reel automatic insertion equipment, when specified.

FIGURE 1. Dimensions and configurations.

© denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

© TABLE I. Style CSR91 characteristics and dash numbers.

Rated voltage	Capacitance (nom)	Capacitance tolerance	DC leakage (max) +25°C	Dissipation factor (max) +25°C	Case size	Dash number Failure rate level (%/1,000 hours) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.01)	C (0.01)	D (0.001)
Volts,NP	µF	percent	µA	percent								
6	2.8	10	.3	4	W	0221	0441	0661	0881	3001	4001	5001
6	3.4	10	.3	6	W	0222	0442	0662	0882	3002	4002	5002
6	3.4	20	.3	6	W	0223	0443	0663	0883	3003	4003	5003
6	23.0	10	1.5	6	X	0224	0444	0664	0884	3004	4004	5004
6	23.0	20	1.5	6	X	0225	0445	0665	0885	3005	4005	5005
6	28.0	10	1.5	6	X	0226	0446	0666	0886	3006	4006	5006
6	75.0	10	4.5	8	Y	0227	0447	0667	0887	3007	4007	5007
6	75.0	20	4.5	8	Y	0228	0448	0668	0888	3008	4008	5008
6	90.0	10	5.5	8	Y	0229	0449	0669	0889	3009	4009	5009
6	130.0	10	6.5	8	Z	0231	0451	0671	0891	3010	4010	5010
6	160.0	10	7.5	8	Z	0233	0453	0673	0893	3011	4011	5011
6	160.0	20	7.5	8	Z	0234	0454	0674	0894	3012	4012	5012
10	1.9	10	.3	4	W	0235	0455	0675	0895	3013	4013	5013
10	2.3	10	.4	4	W	0236	0456	0676	0896	3014	4014	5014
10	2.3	20	.4	4	W	0237	0457	0677	0897	3015	4015	5015
10	13.0	10	2.0	6	X	0238	0458	0678	0898	3016	4016	5016
10	16.0	10	2.5	6	X	0239	0459	0679	0899	3017	4017	5017
10	16.0	20	2.5	6	X	0240	0460	0680	0900	3018	4018	5018
10	19.0	10	2.5	6	X	0241	0461	0681	0901	3019	4019	5019
10	41.0	10	4.0	6	Y	0242	0462	0682	0902	3020	4020	5020
10	50.0	10	5.0	8	Y	0243	0463	0683	0903	3021	4021	5021
10	50.0	20	5.0	8	Y	0244	0464	0684	0904	3022	4022	5023
10	60.0	10	6.0	8	Y	0245	0465	0685	0905	3023	4023	5023
10	90.0	10	9.0	8	Z	0247	0467	0687	0907	3024	4024	5024
10	110.0	10	10.0	8	Z	0248	0468	0688	0908	3025	4025	5025
10	110.0	20	10.0	8	Z	0249	0469	0689	0909	3026	4026	5026
15	1.3	10	.3	4	W	0250	0470	0690	0910	3027	4027	5027
15	1.6	10	.4	4	W	0251	0471	0691	0911	3028	4028	5028
15	1.6	20	.4	4	W	0252	0472	0692	0912	3029	4029	5029
15	9.0	10	2.0	6	X	0253	0473	0693	0913	3030	4030	5030
15	11.0	10	2.0	6	X	0254	0474	0694	0914	3031	4031	5031
15	11.0	20	2.0	6	X	0255	0475	0695	0915	3032	4032	5032
15	28.0	10	4.0	6	Y	0256	0476	0696	0916	3033	4033	5033
15	34.0	10	5.0	6	Y	0257	0477	0697	0917	3034	4034	5034
15	34.0	20	5.0	6	Y	0258	0478	0698	0918	3035	4035	5035
15	60.0	10	9.0	8	Z	0259	0479	0699	0919	3036	4036	5036
15	75.0	10	10.0	8	Z	0260	0480	0700	0920	3037	4037	5037
15	75.0	20	10.0	8	Z	0261	0481	0701	0921	3038	4038	5038
20	.6	10	.3	4	W	0262	0482	0702	0922	3039	4039	5039
20	.75	10	.3	4	W	0263	0483	0703	0923	3040	4040	5040
20	.75	20	.3	4	W	0264	0484	0704	0924	3041	4041	5041
20	.9	10	.3	4	W	0265	0485	0705	0925	3042	4042	5042
20	1.1	10	.4	4	W	0266	0486	0706	0926	3043	4043	5043
20	1.1	20	.4	4	W	0267	0487	0707	0927	3044	4044	5044
20	4.1	10	1.0	6	X	0268	0488	0708	0928	3045	4045	5045
20	5.0	10	1.5	6	X	0269	0489	0709	0929	3046	4046	5046
20	5.0	20	1.5	6	X	0270	0490	0710	0930	3047	4047	5047

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

© TABLE I. Style CSR91 characteristics and dash numbers - Continued.

Rated voltage	Capacitance (nom)	Capacitance tolerance	DC leakage (max) +25°C	Dissipation factor (max) +25°C	Case size	Dash number						
						Failure rate level (%/1,000 hours)						
						M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.01)	C (0.01)	D (0.001)
Volts,NP	µF	percent	µA	percent								
20	6.0	10	1.8	6	X	0271	0491	0711	0931	3048	4048	5048
20	7.5	10	2.0	6	X	0272	0492	0712	0932	3049	4049	5049
20	7.5	20	2.0	6	X	0273	0493	0713	0933	3050	4050	5050
20	13	10	2.5	6	Y	0274	0494	0714	0934	3051	4051	5051
20	16	10	3.5	6	Y	0275	0495	0715	0935	3052	4052	5052
20	16	20	3.5	6	Y	0276	0496	0716	0936	3053	4053	5053
20	19	10	4.0	6	Y	0277	0497	0717	0937	3054	4054	5054
20	23	10	4.5	6	Y	0278	0498	0718	0938	3055	4055	5055
20	23	20	4.5	6	Y	0279	0499	0719	0939	3056	4056	5056
20	28	10	5.5	6	Z	0280	0500	0720	0940	3057	4057	5057
20	34	10	7.0	6	Z	0281	0501	0721	0941	3058	4058	5058
20	34	20	7.0	6	Z	0282	0502	0722	0942	3059	4059	5059
20	41	10	8.0	6	Z	0283	0503	0723	0943	3060	4060	5060
20	50	10	10.0	6	Z	0284	0504	0724	0944	3061	4061	5061
20	50	20	10.0	6	Z	0285	0505	0725	0945	3062	4062	5062
35	2.8	10	1.3	4	X	0289	0509	0729	0949	3063	4063	5063
35	3.4	10	1.5	6	X	0290	0510	0730	0950	3064	4064	5064
35	3.4	20	1.5	6	X	0291	0511	0731	0951	3065	4065	5065
35	11.0	10	4.0	6	Y	0292	0512	0732	0952	3066	4066	5066
35	11.0	20	4.0	6	Y	0293	0513	0733	0953	3067	4067	5067
35	13.0	10	4.5	6	Z	0294	0514	0734	0954	3068	4068	5068
35	16.0	10	5.5	6	Z	0295	0515	0735	0955	3069	4069	5069
35	16.0	20	5.5	6	Z	0296	0516	0736	0956	3070	4070	5070
35	19.0	10	7.0	6	Z	0297	0517	0737	0957	3071	4071	5071
35	23.0	10	8.0	6	Z	0298	0518	0738	0958	3072	4072	5072
35	23.0	20	8.0	6	Z	0299	0519	0739	0959	3073	4073	5073
50	.0023	10	.3	2	W	1171	1241	1311	1381	3074	4074	5074
50	.0023	20	.3	2	W	1172	1242	1312	1382	3075	4075	5075
50	.0028	10	.3	2	W	1173	1243	1313	1383	3076	4076	5076
50	.0034	10	.3	2	W	1174	1244	1314	1384	3077	4077	5077
50	.0034	20	.3	2	W	1175	1245	1315	1385	3078	4078	5078
50	.0041	10	.3	2	W	1176	1246	1316	1386	3079	4079	5079
50	.005	10	.3	2	W	1177	1247	1317	1387	3080	4080	5080
50	.005	20	.3	2	W	1178	1248	1318	1388	3081	4081	5081
50	.006	10	.3	2	W	1179	1249	1319	1389	3082	4082	5082
50	.0075	10	.3	2	W	1180	1250	1320	1390	3083	4083	5083
50	.0075	20	.3	2	W	1181	1251	1321	1391	3084	4084	5084
50	.009	10	.3	2	W	1182	1252	1322	1392	3085	4085	5085
50	.011	10	.3	2	W	1183	1253	1323	1393	3086	4086	5086
50	.011	20	.3	2	W	1184	1254	1324	1394	3087	4087	5087
50	.013	10	.3	2	W	1185	1255	1325	1395	3088	4088	5088
50	.016	10	.3	2	W	1186	1256	1326	1396	3089	4089	5089
50	.016	20	.3	2	W	1187	1257	1327	1397	3090	4090	5090
50	.019	10	.3	2	W	1188	1258	1328	1398	3091	4091	5091
50	.023	10	.3	2	W	1189	1259	1329	1399	3092	4092	5092
50	.023	20	.3	2	W	1190	1260	1330	1400	3093	4093	5093
50	.028	10	.3	2	W	1191	1261	1331	1401	3094	4094	5094
50	.034	10	.3	2	W	1192	1262	1332	1402	3095	4095	5095
50	.034	20	.3	2	W	1193	1263	1333	1403	3096	4096	5096
50	.041	10	.3	2	W	1194	1264	1334	1404	3097	4097	5097

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

© TABLE I. Style CSR91 characteristics and dash numbers - Continued.

Rated voltage	Capacitance (nom)	Capacitance tolerance	© DC leakage (max) +25°C	Dissipation factor (max) +25°C	Case size	Dash number						
						Failure rate level (%/1,000 hours)						
						M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.01)	C (0.01)	D (0.001)
Volts,NP	µF	percent	µA	percent								
50	.05	10	.3	2	W	1195	1265	1335	1405	3098	4098	5098
50	.05	20	.3	2	W	1196	1266	1336	1406	3099	4099	5099
50	.06	10	.3	2	W	1197	1267	1337	1407	3100	4100	5100
50	.075	10	.3	2	W	1198	1268	1338	1408	3101	4101	5101
50	.075	20	.3	2	W	1199	1269	1339	1409	3102	4102	5102
50	.09	10	.3	2	W	1200	1270	1340	1410	3103	4103	5103
50	.11	10	.3	2	W	1201	1271	1341	1411	3104	4104	5104
50	.11	20	.3	2	W	1202	1272	1342	1412	3105	4105	5105
50	.13	10	.3	2	W	1203	1273	1343	1413	3106	4106	5106
50	.16	10	.3	2	W	1204	1274	1344	1414	3107	4107	5107
50	.16	20	.3	2	W	1205	1275	1345	1415	3108	4108	5108
50	.19	10	.3	2	W	1206	1276	1346	1416	3109	4109	5109
50	.23	10	.3	2	W	1207	1277	1347	1417	3110	4110	5110
50	.23	20	.3	2	W	1208	1278	1348	1418	3111	4111	5111
50	.28	10	.3	2	W	1209	1279	1349	1419	3112	4112	5112
50	.34	10	.3	2	W	1210	1280	1350	1420	3113	4113	5113
50	.34	20	.3	2	W	1211	1281	1351	1421	3114	4114	5114
50	.41	10	.3	2	W	0300	0520	0740	0960	3115	4115	5115
50	.50	10	.4	2	W	0301	0521	0741	0961	3116	4116	5116
50	.50	20	.4	2	W	0302	0522	0742	0962	3117	4117	5117
50	.60	10	.4	4	X	1212	1282	1352	1422	3118	4118	5118
50	.75	10	.6	4	X	2001	2101	2201	2301	3119	4119	5119
50	.75	20	.6	4	X	2002	2102	2202	2302	3120	4120	5120
50	.90	10	.7	4	X	1215	1285	1355	1425	3121	4121	5121
50	1.1	10	.8	4	X	1216	1286	1356	1426	3122	4122	5122
50	1.1	20	.8	4	X	1217	1287	1357	1427	3123	4123	5123
50	1.3	10	1.0	4	X	1218	1288	1358	1428	3124	4124	5124
50	1.6	10	1.2	4	X	1219	1289	1359	1429	3125	4125	5125
50	1.6	20	1.2	4	X	1220	1290	1360	1430	3126	4126	5126
50	1.9	10	1.5	4	X	1221	1291	1361	1431	3127	4127	5127
50	2.3	10	1.7	4	X	1222	1292	1362	1432	3128	4128	5128
50	2.3	20	1.7	4	X	1223	1293	1363	1433	3129	4129	5129
50	2.8	10	2.2	4	Y	1224	1294	1364	1434	3130	4130	5130
50	3.4	10	2.2	6	Y	1225	1295	1365	1435	3131	4131	5131
50	3.4	20	2.2	6	Y	1226	1296	1366	1436	3132	4132	5132
50	4.1	10	2.5	6	Y	1227	1297	1367	1437	3133	4133	5133
50	5.0	10	2.5	6	Y	1228	1298	1368	1438	3134	4134	5134
50	5.0	20	2.5	6	Y	1229	1299	1369	1439	3135	4135	5135
50	6.0	10	3.0	6	Y	0303	0523	0743	0963	3136	4136	5136
50	7.5	10	4.0	6	Y	0304	0524	0744	0964	3137	4137	5137
50	7.5	20	4.0	6	Y	0305	0525	0745	0965	3138	4138	5138
50	9.0	10	4.5	6	Y	0306	0526	0746	0966	3139	4139	5139
50	11.0	10	5.5	6	Z	0307	0527	0747	0967	3140	4140	5140
50	11.0	20	5.5	6	Z	0308	0528	0748	0968	3141	4141	5141
75	.34	10	.3	2	W	0309	0529	0749	0969	3142	4142	5142
75	.34	20	.3	2	W	0310	0530	0750	0970	3143	4143	5143
75	.41	10	.3	2	X	2008	2108	2208	2308	3144	4144	5144
75	.50	10	.4	2	X	2009	2109	2209	2309	3145	4145	5145
75	.50	20	.4	2	X	2010	2110	2210	2310	3146	4146	5146
75	.60	10	.4	4	X	2011	2111	2211	2311	3147	4147	5147

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

© TABLE I. Style CSR91 characteristics and dash numbers - Continued.

Rated voltage	Capacitance (nom)	Capacitance tolerance	DC leakage (max) +25°C	Dissipation factor (max) +25°C	Case size	Dash number Failure rate level (%/1,000 hours) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.01)	C (0.01)	D (0.001)
Volts,NP	µF	percent	µA	percent								
75	.75	10	.6	4	X	2012	2112	2212	2312	3148	4148	5148
75	.75	20	.6	4	X	2013	2113	2213	2313	3149	4149	5149
75	.90	10	.7	4	X	2014	2114	2214	2314	3150	4150	5150
75	1.1	10	.8	4	X	2015	2115	2215	2315	3151	4151	5151
75	1.1	20	.8	4	X	2016	2116	2216	2316	3152	4152	5152
75	1.3	10	1.0	4	X	2017	2117	2217	2317	3153	4153	5153
75	1.6	10	1.2	4	X	0311	0531	0751	0971	3154	4154	5154
75	1.6	20	1.2	4	X	0312	0532	0752	0972	3155	4155	5155
75	1.9	10	1.5	4	X	0313	0533	0753	0973	3156	4156	5156
75	2.3	10	3.0	4	Y	2003	2103	2203	2303	3157	4157	5157
75	2.3	20	3.0	4	Y	2004	2104	2204	2304	3158	4158	5158
75	2.8	10	3.0	6	Y	2005	2105	2205	2305	3159	4159	5159
75	3.4	10	5.0	6	Y	2006	2106	2206	2306	3160	4160	5160
75	3.4	20	5.0	6	Y	2007	2107	2207	2307	3161	4161	5161
75	4.1	10	5.0	6	Y	0314	0534	0754	0974	3162	4162	5162
75	5.0	10	5.0	6	Y	0315	0535	0755	0975	3163	4163	5163
75	5.0	20	5.0	6	Y	0316	0536	0756	0976	3164	4164	5164
75	6.0	10	5.0	6	Z	0317	0537	0757	0977	3165	4165	5165
75	7.5	10	7.0	6	Z	0318	0538	0758	0978	3166	4166	5166
75	7.5	20	7.0	6	Z	0319	0539	0759	0979	3167	4167	5167
100	.0023	10	.3	2	W	0320	0540	0760	0980	3168	4168	5168
100	.0023	20	.3	2	W	0321	0541	0761	0981	3169	4169	5169
100	.0028	10	.3	2	W	0322	0542	0762	0982	3170	4170	5170
100	.0034	10	.3	2	W	0323	0543	0763	0983	3171	4171	5171
100	.0034	20	.3	2	W	0324	0544	0764	0984	3172	4172	5172
100	.0041	10	.3	2	W	0325	0545	0765	0985	3173	4173	5173
100	.005	10	.3	2	W	0326	0546	0766	0986	3174	4174	5174
100	.005	20	.3	2	W	0327	0547	0767	0987	3175	4175	5175
100	.006	10	.3	2	W	0328	0548	0768	0988	3176	4176	5176
100	.0075	10	.3	2	W	0329	0549	0769	0989	3177	4177	5177
100	.0075	20	.3	2	W	0330	0550	0770	0990	3178	4178	5178
100	.009	10	.3	2	W	0331	0551	0771	0991	3179	4179	5179
100	.011	10	.3	2	W	0332	0552	0772	0992	3180	4180	5180
100	.011	20	.3	2	W	0333	0553	0773	0993	3181	4181	5181
100	.013	10	.3	2	W	0334	0554	0774	0994	3182	4182	5182
100	.016	10	.3	2	W	0335	0555	0775	0995	3183	4183	5183
100	.016	20	.3	2	W	0336	0556	0776	0996	3184	4184	5184
100	.019	10	.3	2	W	0337	0557	0777	0997	3185	4185	5185
100	.023	10	.3	2	W	0338	0558	0778	0998	3186	4186	5186
100	.023	20	.3	2	W	0339	0559	0779	0999	3187	4187	5187
100	.028	10	.3	2	W	0340	0560	0780	1000	3188	4188	5188
100	.034	10	.3	2	W	0341	0561	0781	1001	3189	4189	5189
100	.034	20	.3	2	W	0342	0562	0782	1002	3190	4190	5190
100	.041	10	.3	2	W	0343	0563	0783	1003	3191	4191	5191
100	.05	10	.3	2	W	0344	0564	0784	1004	3192	4192	5192
100	.05	20	.3	2	W	0345	0565	0785	1005	3193	4193	5193
100	.06	10	.3	2	W	0346	0566	0786	1006	3194	4194	5194
100	.075	10	.3	2	W	0347	0567	0787	1007	3195	4195	5195
100	.075	20	.3	2	W	0348	0568	0788	1008	3196	4196	5196
100	.09	10	.3	2	W	0349	0569	0789	1009	3197	4197	5197
100	.11	10	.3	2	W	0350	0570	0790	1010	3198	4198	5198
100	.11	20	.3	2	W	0351	0571	0791	1011	3199	4199	5199

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

© TABLE I. Style CSR91 characteristics and dash numbers - Continued.

Rated voltage	Capacitance (nom)	Capacitance tolerance	DC leakage (max) +25°C	Dissipation factor (max) +25°C	Case size	Dash number Failure rate level (%/1,000 hours) M (1.0)	P (0.1)	R (0.01)	S (0.001)	B (0.01)	C (0.01)	D (0.001)
Volts,NP	µF	percent	µA	percent								
100	.13	10	.3	2	W	0352	0572	0792	1012	3200	4200	5200
100	.16	10	.3	2	W	0353	0573	0793	1013	3201	4201	5201
100	.16	20	.3	2	W	0354	0574	0794	1014	3202	4202	5202
100	.19	10	.3	2	W	0355	0575	0795	1015	3203	4203	5203
100	.23	10	.3	2	W	0356	0576	0796	1016	3204	4204	5204
100	.23	20	.3	2	W	0357	0577	0797	1017	3205	4205	5205
100	.28	10	.3	2	W	0358	0578	0798	1018	3206	4206	5206
100	.34	10	.3	2	X	0359	0579	0799	1019	3207	4207	5207
100	.34	20	.3	2	X	0360	0580	0800	1020	3208	4208	5208
100	.41	10	.4	2	X	0361	0581	0801	1021	3209	4209	5209
100	.50	10	.5	2	X	0362	0582	0802	1022	3210	4210	5210
100	.50	20	.5	2	X	0363	0583	0803	1023	3211	4211	5211
100	.60	10	.5	4	X	0364	0584	0804	1024	3212	4212	5212
100	.75	10	.7	4	X	0365	0585	0805	1025	3213	4213	5213
100	.75	20	.7	4	X	0366	0586	0806	1026	3214	4214	5214
100	.90	10	.7	4	X	0367	0587	0807	1027	3215	4215	5215
100	1.1	10	.9	4	X	0368	0588	0808	1028	3216	4216	5216
100	1.1	20	.9	4	X	0369	0589	0809	1029	3217	4217	5217
100	1.3	10	1.1	4	X	0370	0590	0810	1030	3218	4218	5218

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: In accordance with MIL-C-39003.

Dimensions and configuration: See figure 1.

Case type: Tubular, insulated.

Capacitance (Cap.)(nom): See table I.

Cap. tolerance: ±10 or ±20 percent as shown in table I.

Failure rate level: See table I.

DC leakage: See table I.

Cap. - In accordance with MIL-C-39003, except the maximum voltage applied during measurement shall be 2.2 volts rms at 120 Hz at 25°C. If ac voltage is less than 0.5 volts, no dc bias is required.

Dissipation factor (DE): See table I.

Marking: In accordance with MIL-C-39003.

Part number: M39003/04-(dash number from table I).

Substitutability data:

Substitutability for failure rate levels shall be as follows: In accordance with MIL-C-39003.

Substitutability for capacitance tolerance shall be as follows:

Cap tolerance	Will replace cap tolerance
10%	20%

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - SH
Air Force - 10, 17, 80, 99
DLA - ES

User activities:
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1431-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-39003/4C	CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, NON-POLARIZED, SINTERED SLUG), ESTABLISHED RELIABILITY, STYLE CSR91

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
	☐ VENDOR
	☐ USER
	☐ MANUFACTURER
	☐ OTHER (Specify)
3b. ADDRESS (Street, City, State, ZIP Code)	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) – Optional	b. WORK TELEPHONE NUMBER (Include Area Code) – Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 1426 PREVIOUS EDITIONS ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:04Z
Check the source to verify that this is the current version before use.