INCH-POUND
MIL-PRF-39003/6F
23 August 2012
SUPERSEDING
MIL-PRF-39003/6E
3 December 2009

PERFORMANCE SPECIFICATION SHEET


CAPACITOR, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM (POLARIZED, SINTERED SLUG), ESTABLISHED RELIABILITY, STYLE CSR33


FAILURE RATE LEVELS “M”, “P”, AND “R” ARE INACTIVE FOR NEW DESIGN AFTER 2 FEBRUARY 1984.

FAILURE RATE LEVEL “S” IS INACTIVE FOR NEW DESIGN AFTER 15 AUGUST 1984.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39003.

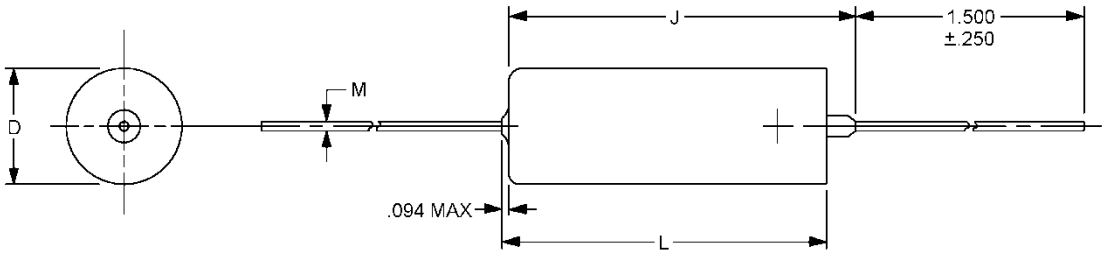

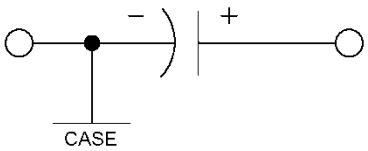

CIRCUIT DIAGRAM

Inches	mm
.094	2.39
.250	6.35
1.500	38.10

CIRCUIT DIAGRAM

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

Case size	Dimensions			
	L ± .031 (0.79)	D + .016 (0.41) - .015 (0.38)	M ± .002 (0.05)	J max
A	.286 (7.26)	.135 (3.43)	.020 (0.51)	.422 (10.72)
B	.474 (12.04)	.185 (4.70)	.020 (0.51)	.610 (15.49)
C	.686 (17.42)	.289 (7.34)	.025 (0.64)	.822 (20.88)
D	.786 (19.96)	.351 (8.92)	.025 (0.64)	.922 (23.42)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are given for general information only.
3. The case insulation shall extend .015 (0.38 mm) minimum beyond each end. However, when a shrink-fitted insulation is used, it shall lap over the ends of the capacitor body.
4. Lead length may be a minimum of 1-inch long for use in tape and reel automatic insertion equipment, when specified.

FIGURE 1. Dimensions and configuration – Continued.

REQUIREMENTS:

Requirements: Requirements shall be in accordance with MIL-PRF-39003, and as specified herein.

Design and construction: Capacitors shall be of the design, construction, and physical dimensions specified on figure 1.

Case type: Tubular, insulated.

Material: Metal (alloy unspecified).

Type of seal: Hermetic.

Leads: Type N-32, N-52, W-32 or W-52 of MIL-STD-1276.

DC rated voltage: See table I. Above +85°C voltage derating is required (see MIL-PRF-39003).

DC leakage (DCL): See table I.

Capacitance (Cap.) (nom): See table I.

Cap. tolerance: See table I.

Dissipation factor (DF): See table I.

Operating temperature: -55°C to +125°C.

Failure rate level: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN's.

DC rated voltage	Capacitance	Capacitance tolerance	DC leakage at +25°C	DC leakage at +85°C +125°C	Dissipation factor at -55°C through +125°C	Case size	PIN M39003/06- 1/ failure rate level for (%1000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	G (1.0)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	percent									
6	10	10	0.5	2	6	A	0001-	0101-	0201-	0301-	5001-	2001-	3001-	4001-
6	10	20	0.5	2	6	A	0002-	0102-	0202-	0302-	5002-	2002-	3002-	4002-
6	12	10	0.5	2	6	A	0003-	0103-	0203-	0303-	5003-	2003-	3003-	4003-
6	100	10	1	3	8	B	0004-	0104-	0204-	0304-	5004-	2004-	3004-	4004-
6	100	20	1	3	8	B	0005-	0105-	0205-	0305-	5005-	2005-	3005-	4005-
6	330	10	2	8	8	C	0006-	0106-	0206-	0306-	5006-	2006-	3006-	4006-
6	330	20	2	8	8	C	0007-	0107-	0207-	0307-	5007-	2007-	3007-	4007-
6	390	10	2	8	10	C	0008-	0108-	0208-	0308-	5008-	2008-	3008-	4008-
6	470	10	2	8	10	C	0009-	0109-	0209-	0309-	5009-	2009-	3009-	4009-
6	470	20	2	8	10	C	0010-	0110-	0210-	0310-	5010-	2010-	3010-	4010-
6	680	10	5	10	10	D	0011-	0111-	0211-	0311-	5011-	2011-	3011-	4011-
6	680	20	5	10	10	D	0012-	0112-	0212-	0312-	5012-	2012-	3012-	4012-
6	820	10	5	10	10	D	0013-	0113-	0213-	0313-	5013-	2013-	3013-	4013-
6	1000	10	5	10	10	D	0014-	0114-	0214-	0314-	5014-	2014-	3014-	4014-
6	1000	20	5	10	10	D	0015-	0115-	0215-	0315-	5015-	2015-	3015-	4015-
10	6.8	10	0.5	2	6	A	0016-	0116-	0216-	0316-	5016-	2016-	3016-	4016-
10	6.8	20	0.5	2	6	A	0017-	0117-	0217-	0317-	5017-	2017-	3017-	4017-
10	8.2	10	0.5	2	6	A	0018-	0118-	0218-	0318-	5018-	2018-	3018-	4018-
10	47	10	1	2	6	B	0019-	0119-	0219-	0319-	5019-	2019-	3019-	4019-
10	47	20	1	2	6	B	0020-	0120-	0220-	0320-	5020-	2020-	3020-	4020-
10	56	10	1	4	6	B	0021-	0121-	0221-	0321-	5021-	2021-	3021-	4021-
10	68	10	1	4	6	B	0022-	0122-	0222-	0322-	5022-	2022-	3022-	4022-
10	68	20	1	4	6	B	0023-	0123-	0223-	0323-	5023-	2023-	3023-	4023-
10	82	10	1	4	6	B	0024-	0124-	0224-	0324-	5024-	2024-	3024-	4024-
10	220	10	1	7	8	C	0025-	0125-	0225-	0325-	5025-	2025-	3025-	4025-
10	220	20	1	7	8	C	0026-	0126-	0226-	0326-	5026-	2026-	3026-	4026-
10	270	10	2	10	8	C	0027-	0127-	0227-	0327-	5027-	2027-	3027-	4027-
10	390	10	2	16	10	D	0028-	0128-	0228-	0328-	5028-	2028-	3028-	4028-
10	470	10	4	16	10	D	0029-	0129-	0229-	0329-	5029-	2029-	3029-	4029-
10	470	20	4	16	10	D	0030-	0130-	0230-	0330-	5030-	2030-	3030-	4030-
10	560	10	4	16	10	D	0031-	0131-	0231-	0331-	5031-	2031-	3031-	4031-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN's. – Continued.

DC rated voltage	Capacitance	Capacitance tolerance	DC leakage at +25°C	DC leakage at +85°C +125°C	Dissipation factor at -55°C through +125°C	Case size	PIN M39003/06- 1/ failure rate level for (%1000 hrs.) M (1.0)	P (0.1)	R (0.01)	S (0.001)	G (1.0)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	percent									
15	4.7	10	0.5	2	4	A	0032-	0132-	0232-	0332-	5032-	2032-	3032-	4032-
15	4.7	20	0.5	2	4	A	0033-	0133-	0233-	0333-	5033-	2033-	3033-	4033-
15	5.6	10	0.5	2	4	A	0034-	0134-	0234-	0334-	5034-	2034-	3034-	4034-
15	33	10	1	2	6	B	0035-	0135-	0235-	0335-	5035-	2035-	3035-	4035-
15	33	20	1	2	6	B	0036-	0136-	0236-	0336-	5036-	2036-	3036-	4036-
15	39	10	1	2	6	B	0037-	0137-	0237-	0337-	5037-	2037-	3037-	4037-
15	150	10	1	7	8	C	0038-	0138-	0238-	0338-	5038-	2038-	3038-	4038-
15	150	20	1	7	8	C	0039-	0139-	0239-	0339-	5039-	2039-	3039-	4039-
15	180	10	2	10	8	C	0040-	0140-	0240-	0340-	5040-	2040-	3040-	4040-
15	220	10	2	10	8	D	0041-	0141-	0241-	0341-	5041-	2041-	3041-	4041-
15	220	20	2	10	8	D	0042-	0142-	0242-	0342-	5042-	2042-	3042-	4042-
15	270	10	2	16	8	D	0043-	0143-	0243-	0343-	5043-	2043-	3043-	4043-
15	330	10	2	16	8	D	0044-	0144-	0244-	0344-	5044-	2044-	3044-	4044-
15	330	20	2	16	8	D	0045-	0145-	0245-	0345-	5045-	2045-	3045-	4045-
20	2.7	10	0.5	2	4	A	0046-	0146-	0246-	0346-	5046-	2046-	3046-	4046-
20	3.3	10	0.5	2	4	A	0047-	0147-	0247-	0347-	5047-	2047-	3047-	4047-
20	3.3	20	0.5	2	4	A	0048-	0148-	0248-	0348-	5048-	2048-	3048-	4048-
20	3.9	10	0.5	2	4	A	0049-	0149-	0249-	0349-	5049-	2049-	3049-	4049-
20	18	10	1	2	6	B	0050-	0150-	0250-	0350-	5050-	2050-	3050-	4050-
20	22	10	1	2	6	B	0051-	0151-	0251-	0351-	5051-	2051-	3051-	4051-
20	22	20	1	2	6	B	0052-	0152-	0252-	0352-	5052-	2052-	3052-	4052-
20	27	10	1	2	6	B	0053-	0153-	0253-	0353-	5053-	2053-	3053-	4053-
20	56	10	1	10	6	C	0054-	0154-	0254-	0354-	5054-	2054-	3054-	4054-
20	68	10	1	10	6	C	0055-	0155-	0255-	0355-	5055-	2055-	3055-	4055-
20	68	20	1	10	6	C	0056-	0156-	0256-	0356-	5056-	2056-	3056-	4056-
20	82	10	1	10	6	C	0057-	0157-	0257-	0357-	5057-	2057-	3057-	4057-
20	100	10	1	10	6	C	0058-	0158-	0258-	0358-	5058-	2058-	3058-	4058-
20	100	20	1	10	6	C	0059-	0159-	0259-	0359-	5059-	2059-	3059-	4059-
20	120	10	1	10	6	C	0060-	0160-	0260-	0360-	5060-	2060-	3060-	4060-
20	150	10	2	10	8	D	0061-	0161-	0261-	0361-	5061-	2061-	3061-	4061-
20	150	20	2	10	8	D	0062-	0162-	0262-	0362-	5062-	2062-	3062-	4062-
20	180	10	2	10	8	D	0063-	0163-	0263-	0363-	5063-	2063-	3063-	4063-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

See footnote at end of table.

TABLE I. Electrical characteristics and PIN's. – Continued.

DC rated voltage	Capacitance	Capacitance tolerance	DC leakage at		Dissipation factor at -55°C through +125°C	Case size	PIN M39003/06- 1/ failure rate level for (%1000 hrs.)							
			+25°C	+85°C +125°C			M (1.0)	P (0.1)	R (0.01)	S (0.001)	G (1.0)	B (0.1)	C (0.01)	D (0.001)
volts	µF	percent	µA	µA	percent									
35	1.8	10	0.5	2	4	A	0064-	0164-	0264-	0364-	5064-	2064-	3064-	4064-
35	8.2	10	1	2	6	B	0065-	0165-	0265-	0365-	5065-	2065-	3065-	4065-
35	10	10	1	2	6	B	0066-	0166-	0266-	0366-	5066-	2066-	3066-	4066-
35	10	20	1	2	6	B	0067-	0167-	0267-	0367-	5067-	2067-	3067-	4067-
35	33	10	1	5	6	C	0068-	0168-	0268-	0368-	5068-	2068-	3068-	4068-
35	33	20	1	5	6	C	0069-	0169-	0269-	0369-	5069-	2069-	3069-	4069-
35	39	10	1	5	6	C	0070-	0170-	0270-	0370-	5070-	2070-	3070-	4070-
35	47	10	1	5	6	C	0071-	0171-	0271-	0371-	5071-	2071-	3071-	4071-
35	47	20	1	5	6	C	0072-	0172-	0272-	0372-	5072-	2072-	3072-	4072-
35	56	10	2	10	6	D	0073-	0173-	0273-	0373-	5073-	2073-	3073-	4073-
35	68	10	2	10	6	D	0074-	0174-	0274-	0374-	5074-	2074-	3074-	4074-
35	68	20	2	10	6	D	0075-	0175-	0275-	0375-	5075-	2075-	3075-	4075-
50	1.2	10	0.5	2	4	A	0076-	0176-	0276-	0376-	5076-	2076-	3076-	4076-
50	1.5	10	0.5	2	4	A	0077-	0177-	0277-	0377-	5077-	2077-	3077-	4077-
50	1.5	20	0.5	2	4	A	0078-	0178-	0278-	0378-	5078-	2078-	3078-	4078-
50	5.6	10	1	2	4	B	0079-	0179-	0279-	0379-	5079-	2079-	3079-	4079-
50	6.8	10	1	2	6	B	0080-	0180-	0280-	0380-	5080-	2080-	3080-	4080-
50	6.8	20	1	2	6	B	0081-	0181-	0281-	0381-	5081-	2081-	3081-	4081-
50	22	10	1	5	6	C	0082-	0182-	0282-	0382-	5082-	2082-	3082-	4082-
50	22	20	1	5	6	C	0083-	0183-	0283-	0383-	5083-	2083-	3083-	4083-
50	27	10	1	5	6	C	0084-	0184-	0284-	0384-	5084-	2084-	3084-	4084-
50	33	10	1	9	6	D	0085-	0185-	0285-	0385-	5085-	2085-	3085-	4085-
50	33	20	1	9	6	D	0086-	0186-	0286-	0386-	5086-	2086-	3086-	4086-
50	39	10	1	9	6	D	0087-	0187-	0287-	0387-	5087-	2087-	3087-	4087-

1/ Dash number shall include a letter that indicates user preference for surge current/high temperature solder or the dash will be deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS – Continued:

Stability at low and high temperatures: In accordance with MIL-PRF-39003.

Step 1 (+25°C):

DCL: See table I.

Capacitance: Within tolerance of table I value.

DF: See table I.

Step 2 (-55°C):

Capacitance: Shall not change more than ± 10 percent of step 1 measured value.

DF: See table I.

Step 3 (+25°C):

DCL: See table I.

Capacitance: Shall not change more than ± 2 percent of step 1 measured value.

DF: See table I.

Step 4 (+85°C):

DCL: See table I.

Capacitance: Shall not change more than ± 8 percent of step 1 measured value.

DF: See table I.

Step 5 (+125°C):

DCL: See table I.

Capacitance: Shall not change more than ± 12 percent of step 1 measured value.

DF: See table I.

Step 6 (+25°C):

DCL: See table I.

Capacitance: Shall not change more than ± 2 percent of step 1 measured value.

DF: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

Surge voltage: In accordance with MIL-PRF-39003.

DCL: See table I.

Capacitance: Shall not change more than ± 2 percent of initial measured value.

DF: See table I.

Life: Method 108 of MIL-STD-202.

240, 1,000, and 2,000 hours:

At +25°C (as applicable):

DCL: See table I.

Capacitance: Shall not change more than ± 5 percent of initial measured value.

DF: See table I.

At +85°C:

DCL: See table I.

At +125°C:

DCL: See table I.

4,000, 6,000, 8,000, and 10,000 hours (exponential only):

At +25°C (as applicable):

DCL: 200 percent of initial limit.

Capacitance: Shall not change more than ±10 percent of initial measured value.

DF: See table I.

At +85°C:

DCL: 200 percent of initial limit.

At +125°C:

DCL: 200 percent of initial limit.

Marking: In accordance with MIL-PRF-39003.

Part or Identifying Number (PIN): M39003/06-(dash number from table I).

Substitutability data: Substitutability for failure rate levels and capacitance tolerances shall be in accordance with MIL-PRF-39003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.

Reference documents. In addition to MIL-PRF-39003, this specification sheet references the following documents.

MIL-STD-202
MIL-STD-1276

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2010-013)

Review activities:
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:05Z
Check the source to verify that this is the current version before use.