MIL-C-60181(MU)
2 March 1965

MILITARY SPECIFICATION

CONTAINER, SHIPPING, REUSABLE: 10539223

1. SCOPE

1.1 This specification covers the fabrication and testing of one type reusable container assembly for the Signal Data Reproducer AN/GSQ-64 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-E-529	Enamel, ALKYD, Semi-Gloss
QQ-S-633	Steel Bars, Carbon, Cold Finished and Hot Rolled, General Purpose

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5090	Adhesives, Heat Resistant, Airframe Structural, Metal to Metal
MIL-A-5092	Adhesive, Rubber, Synthetic and Reclaimed Rubber Base
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-B-7883	Brazing of Steels, Copper, Copper Alloys, and Nickel Alloys
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel, Packaging For
MIL-C-21567	Compound, Silicone, Soft Film
MIL-I-45607	Inspection Equipment, Supply and Maintenance Of

STANDARDS

Federal

FED-STD-595	Colors

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MS16535	Rivet, Tubular Oval Head

DRAWINGS

U.S. Army Munitions Command

A10533221	Plate, Valve Instruction
A10539222	Valve, Relief
A10539223	Case, Shipping for Reproducer, Signal Data AN/GSQ-64
B8246019	Card Holder
B10533212	Plate, Back-up
B10539157	Extrusion Edge, Female
B10539158	Extrusion Edge, Male
C10511987	Handle
C10539217	Clamp Assembly

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as indicated by contracting officer.)

2.2 Other publications.- The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

(Copies of tests may be obtained from American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

3. REQUIREMENTS

3.1 Reusable cases.- Reusable container shall be fabricated in accordance with the requirements specified herein, to provide a pressure tight case capable of protecting equipment against environmental conditions normally encountered

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

during storage and shipment. The cases shall be assembled as shown on Figure 1.

3.1.1 Initial production sample. - Prior to initiation of regular production, the supplier shall submit an initial production sample. The sample shall consist of one container complete with inserts. The sample shall be manufactured, using the same materials, processes and procedures as will be used for regular production. All parts and materials, including packaging and packing, shall be the same as will be used for regular production and shall be obtained from the same source of supply. The Government reserves the right to require new initial production samples until such time as an acceptable sample is submitted.

3.2 Material. - Material used for forming case shells shall be pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used for processing into pressed laminated sheets shall be virgin stock of first use, and shall be capable of passing the fungus resistance test specified in 4.6.2. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

TABLE I

DETAIL REQUIREMENTS FOR RIGID ABS PLASTICS

	ASTM METHOD*	
Tensile strength, Min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), Min. ft. lb. per inch of notch		
23° ± 2°C (73.4° ± 3.6°F)	D256	5.5
-40° ± 2°C (-40° ± 3.6°F)	Method A	2.0
Specific gravity		
Min.	D792	1.0
Max.	Method A	1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C	D543	5.0
Weight change, max. percent		

*These designations refer to the following methods of the American Society of Testing Materials:

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Tests for Specific Gravity and Density of Plastics

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

3.2.1 Color.- Unless otherwise specified, material for forming case shells shall be Olive Drab conforming to Color No. X24087 of FED-STD-595. A material swatch shall be submitted for approval prior to production.

3.3 Fabrication.

3.3.1 Description.- The container assembly fabricated to the requirements of this specification basically consists of a lower and upper shell joined together with a sealing extrusion and secured with closure latches. The interior is provided with four (4) polyethylene cushion inserts.

3.3.2 Case forming process.- The upper and lower shells shown in Figures 3 and 4 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes, with no vacuum vent or thermal shock stress marks visible on outside surfaces of formed piece.

3.3.3 Sealing extrusions.- The upper sealing extrusion shall conform to Drawing B10539157, length as required. The lower sealing extrusion shall conform to Drawing B10539158, length as required. The extrusion shall be formed to exact case radii in one piece by proven forming techniques and controlled tooling to provide uniformity in flatness and alignment. Suitable flexible inserts shall be used to prevent distortion or chatter of formed extrusions. The formed extrusions shall be provided with a maximum gap of 1/32 inch on length to be welded. The upper and lower extrusions shall be joined by butt welding which shall be ground smooth and exhibit soundness of good practices conforming to the requirements of MIL-W-8604.

3.3.3.1 Finish.- The sealing extrusions shall be surface treated by finish No. 7.3 followed by paint finish No. 2L3 of MIL-STD-171, color No. X24087 of FED-STD-595. Finish shall be applied prior to assembly of extrusions to case shells.

3.3.3.2 Bonding of extrusions.- The extrusions shall be attached to the case shells with a two part polyamid epoxy conforming to the general requirements of MIL-A-5090, applied in a manner to provide structural integrity and a pressure tight joint. The extrusions shall be tool rolled and crimped around the periphery to assure a positive attachment to case shells.

3.3.4 Sealing gasket.- Gasket shall be fabricated from tubular rubber conforming to MIL-R-3065, Class SC, Grade 412ABFFK, .265 O.D. by .156 I.D. The gasket may be formed by molding or vulcanizing and bonded in such a manner that assures a uniform fit in female extrusion well. Prior to inserting the gasket, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied in the female extrusion. There shall be no evidence of excess adhesive in the gasket well. The gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.3.5 Clamp, fastener.- Eight (8) fasteners conforming to Drawing C10539217-2 shall be attached to lower sealing extrusion as shown on Figures 1 and 2.

3.3.6 Handles.- A total of two handles (1 each end) conforming to Drawing C10511987 shall be assembled and riveted to case with back-up plates conforming to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

B10533212 as shown on Figure 1. Rivets shall conform to MS16535, diameter .188, steel, length as required, and shall secure handle in a manner so as to provide a pressure tight attachment. Handles shall be painted by finish No. 21.3 of MIL-STD-171. Top coat paint color shall be color No. X24087 of FED-STD-595. Paint finish shall not be applied to Hycar rubber on handle. Rivet heads shall be touched up with paint conforming to TT-E-529, color No. X24087 of FED-STD-595.

3.3.7 Card holders.- Two (2) card holders shall be assembled to the front side of the assembled case as shown on Figure 1. The card holders shall conform to Drawing B8246019-1 and B8246019-2. The card holders shall be secured to the case by seven each rivets conforming to MS16535, diameter .123, steel, length as required.

3.3.8 Automatic breather valve.- A two way automatic breather valve conforming to Drawing A10539222 shall be assembled to the case as shown on Figure 1.

3.3.8.1 Decal.- A decal conforming to Drawing A10533221 shall be installed above breather valve as shown on Figure 1.

3.4 Interior arrangement.

3.4.1 Description.- The interior arrangement consists of four interchangeable polyethylene cushion inserts; two in the body and two in the cover, bonded in position as shown on Figure 6.

3.4.1.1 Cushioning.- Cushion inserts shown on Figure 6 shall be fabricated of polyethylene foam 2 lbs/cubic foot density, color charcoal as shown on Fig. 7.

3.5 Marking.- Marking legends shown on Figure 1 shall be applied by a silk screen or stencil, System No. 21.1 of MIL-STD-171; Color, White 17875 of FED-STD-595.

3.6 Performance requirements.- The reusable case fabricated to the requirements of this specification shall maintain a positive pressure of 1 psi without loss of pressure. Testing for this requirement shall be in accordance with 4.6.1.

3.7 Environmental.

3.7.1 Fungus resistance.- The ABS plastic material shall meet fungus resistance requirements of Procedure I of MIL-E-5272.

3.7.2 Heat resistance.- The container assembly shall be capable of maintaining dimensional and structural integrity when subjected to elevated temperature conditioning. The container shall show no evidence of distortion or delamination and shall be capable of being pressure tight after container is conditioned at ambient temperatures.

3.7.3 Impact resistance (ambient temperature).- The assembled container shall show no evidence of cracking, chipping or delamination when dropped from a height of 30 inches. The container shall then be tested for being pressure tight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

3.7.4 Impact resistance (low temperature).- The container assembly shall show no evidence of cracking or fracture when subjected to low temperature conditioning at -40°F immediately followed by drop test from a height of 18 inches. The container shall be tested for being pressure tight after container is conditioned at ambient temperatures.

3.8 Workmanship.- Cases, fabricated to the requirements of this specification, shall be in accordance with proven commercial forming techniques and shall be free of defects that might affect strength, serviceability, and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The quality assurance provisions of this specification and of other documents referenced herein form the basis for inspection to be performed by the supplier. Inspection of components and subassemblies not covered by specifications shall be in accordance with 4.3.2. Definitions of inspection terms not otherwise defined herein shall be as listed in MIL-STD-109.

4.2 Initial production sample.- The initial production samples specified in 3.1.1 shall be submitted for inspection by the contractor under the surveillance of the Government. This inspection shall be conducted at the contractor's facility, or Government approved laboratory, using test equipment authorized for use on the contract. The samples shall be inspected for all requirements of this specification by utilizing examination and testing methods prescribed herein.

4.2.1 Disposition of rejected initial production samples.- Should the initial production sample specified in 3.1.1 fail to pass the test for Government acceptance, production of those components causing rejection will cease until the defective characteristics have been corrected in the process used to produce the initial production sample. When corrections in the process have been made, new samples shall be submitted, examined and tested by the contractor under the surveillance of the Government. Acceptance of production lots will not commence until acceptable initial production samples are submitted and corrective actions have been taken to eliminate deficiencies.

4.3 Inspection provisions.

4.3.1 Inspection lot.- Unless otherwise specified by the contracting officer, inspection lot size, formation, and presentation of lots shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

defect (individual characteristics) basis in accordance with MIL-STD-105, and the inspection level and sampling plans specified in Table II titled "Classification of Defects". The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot. The Government reserves the right to inspect for any applicable requirement, and to reject individual non-conforming items.

TABLE II - CLASSIFICATION OF DEFECTS

Use Inspection Level II of Table I with
Sampling Plan Table II-A of MIL-STD-105

		REQUIREMENT	TEST PROCEDURE
CRITICAL:	NONE		
MAJOR:	AQL 1.5%		
101.	Certification of materials	3.2	Visual
102.	Improper forming	3.3.2	Visual
103.	Sealing extrusion improperly formed, poor joints, welding, improperly finished	3.3.3 3.3.3.1	Visual
104.	Improper bonding	3.3.3.2	Visual, Certification
105.	Improper fasteners or assembly to case	3.3.5	SME & Visual
106.	Card holders	3.3.7	Visual
107.	Improper handle, improperly assembled	3.3.6	Visual
108.	Improper gasket, improperly secured	3.3.4	Visual
109.	Improper breather valve	3.3.8	Visual
110.	Incorrect decal	3.3.8.1	Visual
111.	Cushion not fabricated to figures, or bonded in position properly	3.4.1, 3.4.1.1	Visual, Tactile
112.	Marking incorrectly applied	3.5	Visual
MINOR:	AQL 2.5%		
201.	Color match	3.2.1	Visual
202.	Excess adhesive on gasket	3.3.4	Visual

4.3.3 Disposition on non-conforming product.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Control tests.

4.4.1 General.- One container shall be selected at random as a control sample from each 100 produced, or from each month's production, whichever occurs first. The control sample shall have successfully met all other acceptance test specified herein, and shall then meet the following requirements and tests:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.1, 3.5	SME - Visual - Figures 1, 2, 3, 4, 5, 6 and 7
302. Workmanship	3.9	Visual - Figures 1, 2, 3, 4, 5, 6 and 7

4.4.2 Environmental and functional. - Two cases shall be selected at random as control samples from each 100 produced, or from each month's production whichever occurs first. The control samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
303. Impact resistance	3.7.3	4.6.4
304. Pressure tight	3.6	4.6.1

4.4.3 Control test failure. - Should any one item of a control test sample fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved.

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall maintain all required measuring and testing equipment in accordance with the applicable requirements specified in MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.5.1 Government furnished inspection equipment. - Where the contract provides for Government furnished test equipment, care and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Contractor design. - The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 and with the "Component Inspection" requirements of MIL-F-13926. Concept, construction, materials, dimensions, and tolerance used in design of test equipment shall be so selected and controlled as to insure that the test equipment will permit positive rejection of a product which exceeds the prescribed tolerance limit, and will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit. Construction shall be such as to facilitate routine calibration of the equipment.

4.5.2.2 Preparation for tests. - The initial production sample shall be fitted with a simulated dummy load of the same weight and mass as the Reproducer, Signal Data AN/GSQ-64 (see 6.4).

4.6 Test methods and procedures.

4.6.1 Pressure retention test. - The container shall have the breather valve

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

removed and replaced by an appropriate plug. A suitable connection shall be made for the introduction of air pressure. A gage shall be connected to indicate pressure within the container. Air pressure shall be applied up to 1 pound per square inch and the intake valve closed to retain pressure. A soap solution shall be applied to all joints, seams and welds. There shall be no evidence of leakage. After five minutes the gage shall be observed to make sure that the original pressure has been maintained.

4.6.2 Fungus resistance.- Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. At the completion of the test period any growth or fungus which would impair the function of the case or any profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their sheet material has been tested by above procedure and is fungus resistant. Test data accumulated from prior listing shall be furnished with certification.

4.6.3 Heat resistance test.- Initial production case with breather valve removed shall be stabilized at 150°F, dry heat in an oven with forced air circulation for a period of 4 hours. After normal air cooling to room temperature, the case shall be examined for defects, including dimensional changes. Any change in dimensions which will adversely affect the appearance, stacking or performance of the cases shall be regarded as a defect. The container shall then be subjected to pressure test specified in 4.6.1 after case has been stabilized at ambient temperatures.

4.6.4 Impact resistance (ambient temperature).- The container sample fitted with simulated load shall be subjected to a 30 inch flat drop, once on the top and once on the bottom and then shall be subjected to the pressure test specified in 4.6.1.

4.6.5 Impact resistance (low temperature).- The initial production container shall be placed in a chamber and the case and contents stabilized at -40°F for a period of 4 hours. The case shall be subjected to a 18 inch flat drop, once on the top and once on the bottom. The container shall then be subjected to pressure test specified in 4.6.1, after container has been stabilized at ambient temperatures.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Unless otherwise specified the cases shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The reusable container defined herein is intended for all types of storage and shipment for Reproducer, Signal Data AN/GSQ-64. The container constitutes the unit package and shipping container, box 1 of 2, as specified in MIL-P-14232/F8575680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Applicable stock number

6.3 Definition.

6.3.1 Standard measuring equipment (SME).- Standard measuring equipment (SME) includes the common hand type measuring devices which are usually stocked by commercial supply houses for ready supply shelf items, and which are normally used by an inspector to prepare dimensional inspection of items under procurement. This category also includes commercial testing equipment.

6.3.2 Tactile.- Skillful manipulation or sensing.

6.4 Weight.- The simulated dummy load for the Reproducer, Signal Data AN/GSQ-64 shall have a weight of 60 pounds.

Custodian:

Army-MU

Preparing activity:

Army-MU

Project No. 1220-A179Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.


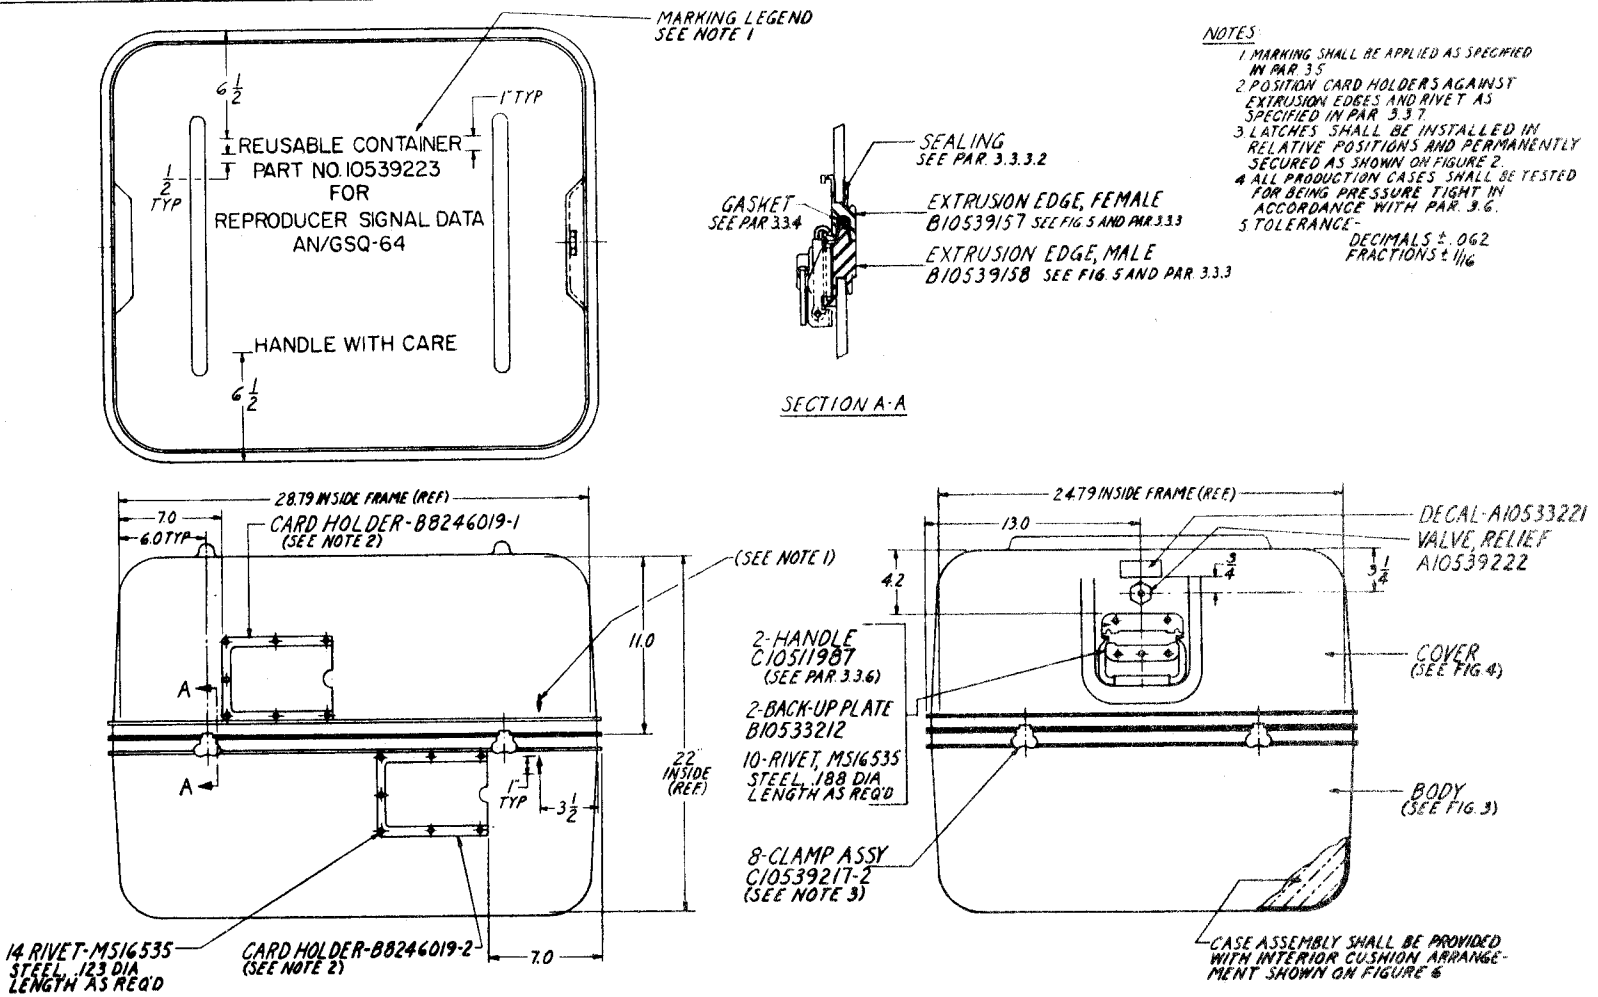



FIGURE 1- CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:19Z
Check the source to verify that this is the current version before use.

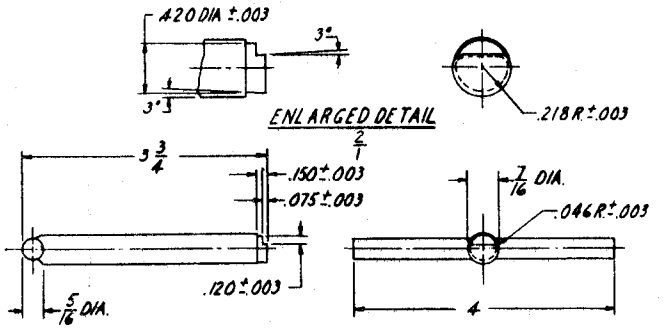


VIEW 1-INSTALLATION TOOL

MATERIAL-STEEL C1045 OF QQ-S-633
BRAZING-MIL-B-7883
ROCKWELL HARDNESS-C45-C50
FINISH-BLACK OXIDE-MIL-STD-171 FINISH NO. 3.3.3

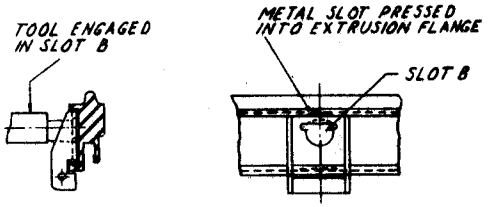

VIEW 2-BASE PLATE POSITIONED IN EXTRUSION

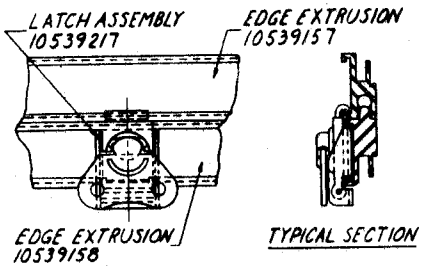

VIEW 3-LATCH ASSEMBLY INSTALLED

INSTALLATION PROCEDURE:
1. LOCATE LATCH ASSEMBLY IN POSITION AS SHOWN ON FIGURE 1.
2. POSITION BASE PLATE IN EXTRUSION FLANGE.
3. ENGAGE INSTALLATION TOOL (VIEW 1) INTO SLOT B AS SHOWN IN VIEW 2.
4. FIRMLY PRESS TOOL DOWNWARD AND TURN TOOL 90° TO THE RIGHT AND 90° TO THE LEFT TO DEFORM SLOT OF BASE PLATE IN EXTRUSION FLANGE AS SHOWN IN VIEW 2.

FIGURE 2-INSTALLATION OF HARDWARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR 3.2 MIL-C-60181
STARTING THICKNESS .250±.005
COLOR-OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
* FORMED THICKNESS MEASURED TOP PORTION .120 $^{+.020}_{-.010}$
2. TOLERANCE-
±.12-PRODUCTION SHELLS MUST BE WITHIN .062 OF EACH OTHER
3. OTHER TOLERANCES-
DECIMALS ±.062
ANGLES $^{+1°}_{-0°}$

SUGGESTED MATERIAL SOURCES
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-1211-CPA 1492
OR
BOLTA PRODUCTS DIVISION OF
GENERAL TIRE AND RUBBER CO.
LAWRENCE, MASS.
BOLTARON SERIES-6000

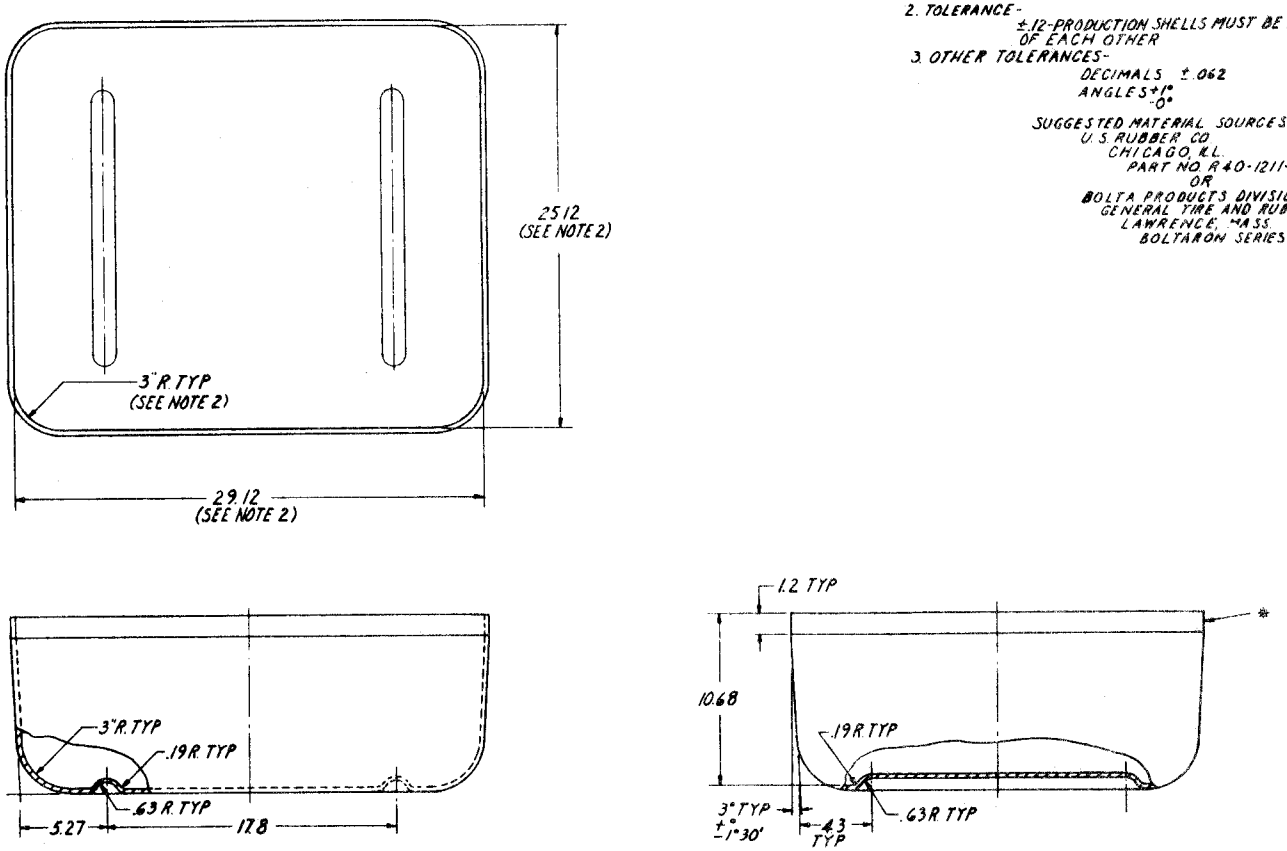
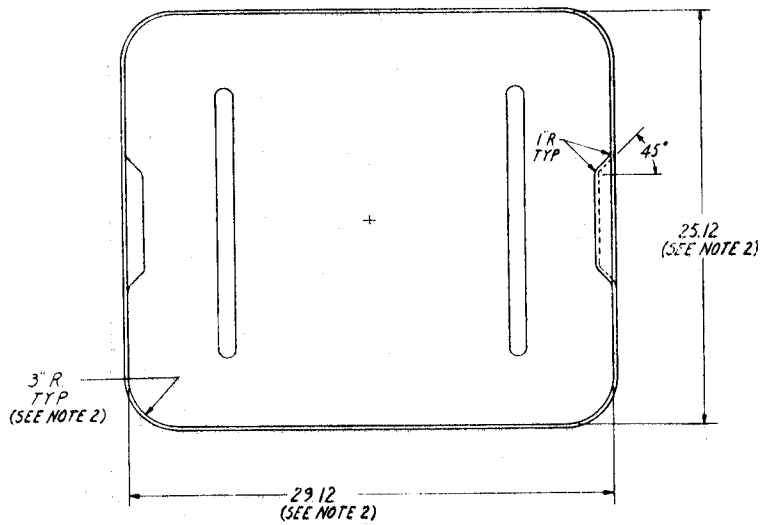



FIGURE 3 - SHELL, BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR 3.2 MIL-C-6018B
STARTING THICKNESS .250 ± .005
COLOR- OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
FINISH- HAIRCELL GRAIN (EXTERIOR SURFACE)
HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
* FORMED THICKNESS MEASURED TOP PORTION .120 $^{+.020}_{-.010}$
2. TOLERANCE- ±.12- PRODUCTION SHELLS MUST BE WITHIN .062 OF EACH OTHER
3. OTHER TOLERANCES-
DECIMALS ±.062
ANGLES $^{+1°}_{-0°}$

SUGGESTED MATERIAL SOURCES:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-1211-CPA 1492
OR
BOLTA PRODUCTS DIVISION OF
GENERAL TIRE AND RUBBER CO.
LAWRENCE, MASS.
BOLTARON SERIES-6000



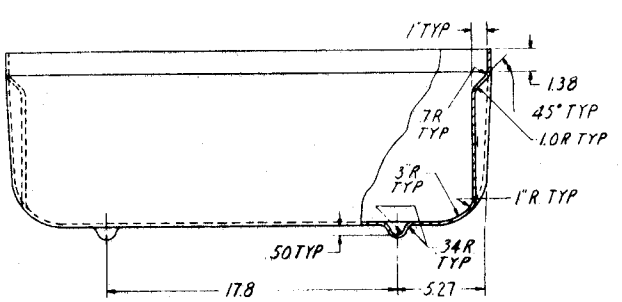



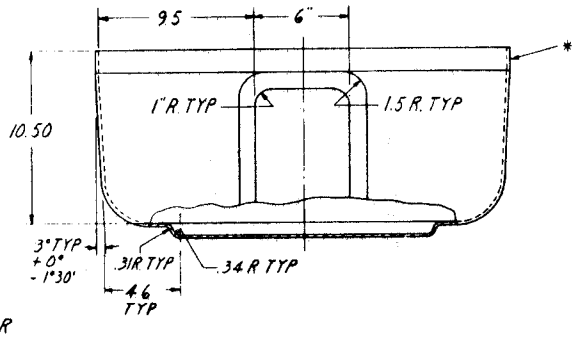


FIGURE 4- SHELL, COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

NOTES
1 COMPLETED EDGE FRAMES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN TYPICAL SECTION
2 MUST MATCH SHELLS SHOWN ON FIGURES 3 AND 4
3 EDGE FRAMES SHALL BE FORMED, WELDED ALODIZED AND FINISHED IN ACCORDANCE WITH PAR 3.3.3 AND 3.3.3.1

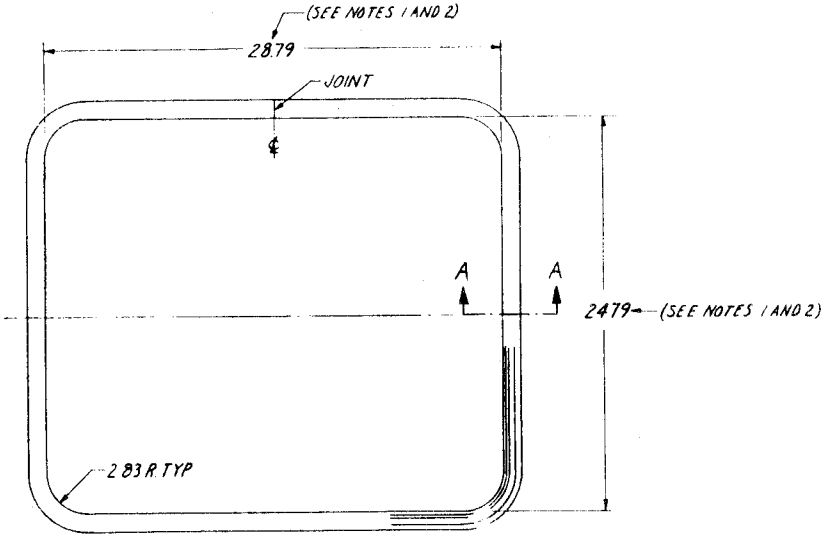

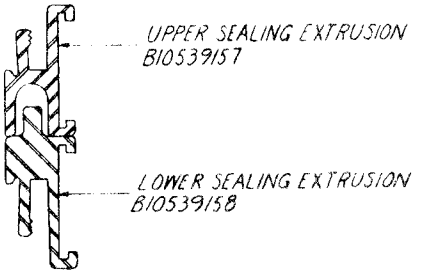

SECTION A-A

FIGURE 5-EDGE FRAME ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

NOTE

1. UPPER AND LOWER CUSHION INSERTS SHALL BE SECURELY BONDED IN POSITION SO AS TO EXHIBIT A SUITABLE PERMANENT TYPE BOND WITH ADHESIVE CONFORMING TO MIL-A-3092, TYPE II. SURFACES OF PLASTIC SHELLS SHALL BE FREE OF FOREIGN SUBSTANCES PRIOR TO APPLICATION OF ADHESIVE.



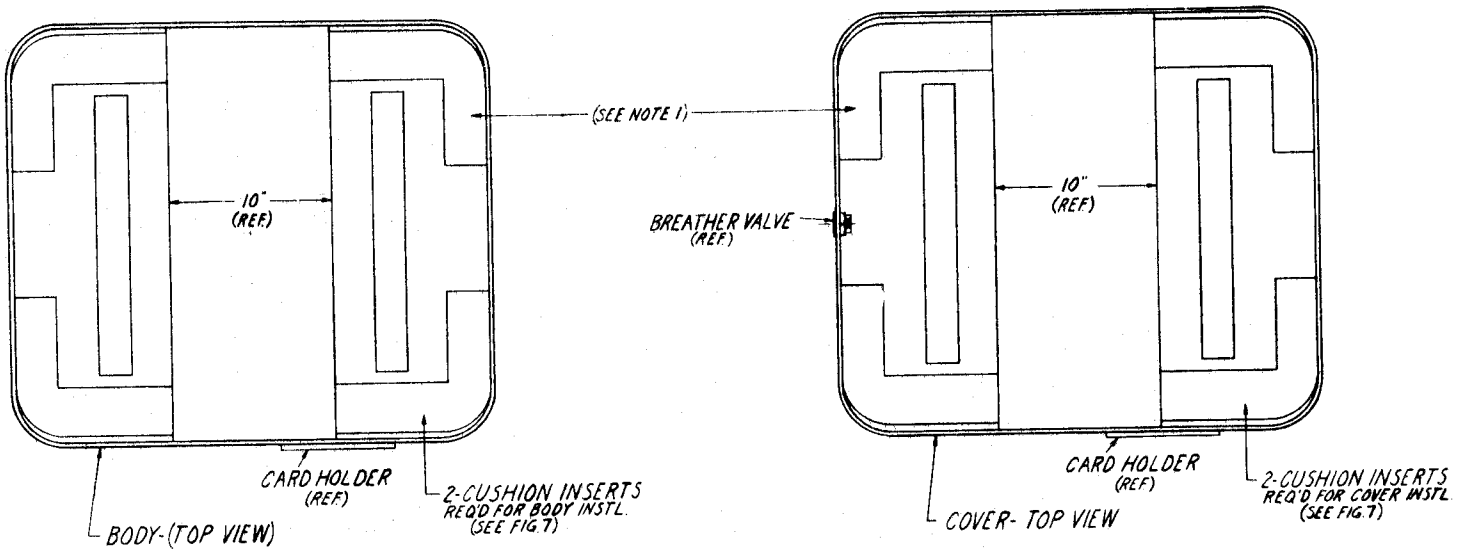


FIGURE 6- CUSHION PAD ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

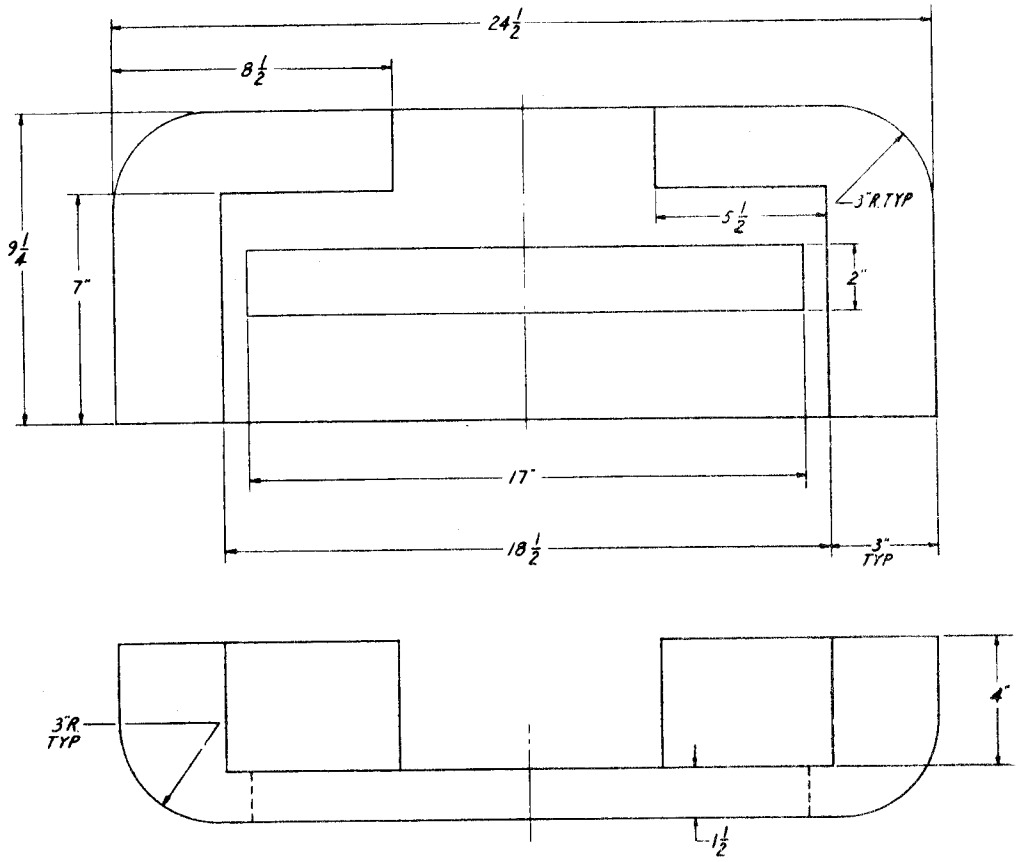

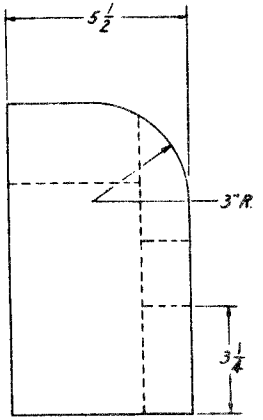

NOTES:
1. CUSHION INSERT SHALL BE FABRICATED OF POLYETHYLENE FOAM.
MATERIAL - 2.0 LBS/CUBIC FOOT DENSITY
COLOR - CHARCOAL
2. INSERT SHALL BE FABRICATED BY FUSION BONDING WITH HEAT APPLICATION.
3. TOLERANCE:
FRACTIONS ± 1/16

FIGURE 7- INTERCHANGEABLE CUSHION INSERT

MIL-C-43819(AS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.