MILITARY SPECIFICATION

CASE, BATTERY COMMAND PERISCOPE: M165

1. SCOPE

1.1 This specification covers the fabrication and testing of one type carrying case assembly for Battery Command Periscope M43 W/E (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-S-633	Steel Bars, Carbon, Cold Finished and Hot Rolled, General Purpose

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5090	Adhesives, Heat Resistant, Airframe Structural, Metal to Metal
MIL-A-5092	Adhesive, Rubber, Synthetic and Reclaimed Rubber Base
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-B-7883	Brazing of Steels, Copper, Copper Alloys and Nickel Alloys
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-C-21567	Compound, Silicone, Soft Film
MIL-I-45607	Inspection Equipment, Supply and Maintenance Of

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces

DRAWINGS

U.S. Army Munitions Command

A10533221	Plate, Valve Instruction
A10539222	Valve, Relief
A10540496	Case, Battery Command Periscope:M165
B10539157	Extrusion Edge Female
B10539158	Extrusion Edge Male
C10539216	Handle Assembly
C10539217	Clamp Assembly
D10540474	Hinge Assembly
D10541410	Clasp Assembly

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as indicated by contracting officer.)

2.2 Other publications. - The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

(Copies of tests may be obtained from American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 General. - Carrying case shall be fabricated in accordance with the requirements specified herein, to provide a lightweight watertight case with provisions for containing the periscope and associated equipment.

3.1.1 Initial production sample. - Prior to initiation of regular production, the supplier shall submit an initial production sample. The sample shall consist of one case complete with inserts. The sample shall be manufactured, using the same materials, processes and procedures as will be used for regular production. All parts and materials, including packaging and packing, shall be the same as will be used for regular production and shall be obtained from the same source of supply. The Government reserves the right to require new initial production samples until such time as an acceptable sample is submitted.

3.2 Material. - Material used for forming case shells shall be pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used for processing into pressed laminated sheets shall be virgin stock and shall be capable of passing the fungus resistance test specified in 4.6.2. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

TABLE I

DETAIL REQUIREMENTS FOR RIGID ABS PLASTICS

	ASTM METHOD*	
Tensile strength, Min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), Min. ft. lb. per inch of notch		
23° ± 2°C (73.4° ± 3.6°F)	D256	5.5
-40° ± 2°C (-40° ± 3.6°F)	Method A	2.0
Specific Gravity		
Min.	D792	1.0
Max.	Method A	1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Tests for Specific Gravity and Density of Plastics

3.2.1 Color. - Unless otherwise specified, material for forming case shells shall be olive drab conforming to color No. X24087 of FED-STD-595.

3.3 Fabrication.

3.3.1 Description. - The carrying case assembly Part No. 10540496 fabricated to the requirements of this specification basically consists of a lower and upper shell joined together with a sealing extrusion and secured with hinges and clamp fasteners. The interior is provided with polyethylene cushion inserts in the body and cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

3.3.2 Case forming process. - The upper and lower shells shown in Figures 3 and 4 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes, with no vacuum vent or thermal shock stress marks visible on outside surfaces of formed piece.

3.3.3 Sealing extrusions. - The upper sealing extrusion shall conform to Drawing B10539157 and the lower sealing extrusion shall conform to Drawing B10539158. The extrusions shall be formed to exact case radii in one piece by proven forming techniques and controlled tooling to provide uniform alignment as shown on Figure 5. The formed extrusions shall be provided with a maximum gap of 1/32 inch on length to be welded. The upper and lower extrusions shall be joined by butt welding which shall be ground smooth and exhibit soundness of good practices conforming to the requirements of MIL-W-8604.

3.3.3.1 Finish. - The sealing extrusions shall be surface treated by finish No. 7.3 followed by paint finish No. 21.3 of MIL-STD-171, color No. X24087 of FED-STD-595. Finish shall be applied prior to assembly of extrusions to container shells.

3.3.3.2 Bonding of extrusions. - The extrusion shall be attached to the container shells with a two part polyamid epoxy meeting the general requirements of MIL-A-5090, applied in a manner so as to provide structural integrity and a watertight joint. The extrusions shall be tool rolled and crimped around the periphery to assure a positive attachment to case shells.

3.3.4 Clamp, fasteners. - Six (6) clamp fasteners conforming to Drawing C10539217-2 shall be attached to lower extrusion as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2.

3.3.5 Hinges. - Two (2) hinges conforming to Drawing D10540474-2 shall be attached to extrusions as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2.

3.3.6 Handles. - Two (2) handles conforming to Drawing C10539216-2, shall be attached to lower extrusion, at each end of carrying case as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2.

3.3.7 Sealing gasket. - Gasket shall be fabricated from neoprene rubber conforming to MIL-R-3065, Class SC, Grade 412ABFFK, .265 O.D. by .156 I.D. The gasket may be formed by molding or vulcanizing and bonded in such a manner that assures a uniform fit in female extrusion well. Prior to inserting the gasket, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied in the female extrusion. There shall be no evidence of excess adhesive in the gasket well. The gasket shall be surface treated with a soft film silicone compound of MIL-C-21567.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:20Z
Check the source to verify that this is the current version before use.

3.3.8 Automatic breather valve. - An automatic breather valve conforming to Drawing A10539222 shall be installed on the body of case as shown on Figure 1.

3.3.8.1 Decal. - A decal conforming to Drawing A10533221 shall be installed adjacent to breather valve as shown on Figure 1.

3.3.9 Clasp assembly. - Four (4) clasp assemblies conforming to Drawing D10541410-2 shall be attached to lower extrusion; two (2) at each end of carrying case as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2.

3.4 Interior cushion inserts.

3.4.1 Cushion inserts. - The carrying case shall be provided with one (1) lower cushion insert fabricated as shown on Figure 7 and one (1) cushion hold down fabricated as shown on Figure 8. The cushions shall be bonded in relative positions with adhesive as shown on Figure 6. Adhesive shall conform to MIL-A-5092, Type II.

3.5 Marking. - Marking Legend shown on Figure 1 shall be applied by a silk screen or stencil, finish No. 21.1 of MIL-STD-171; color black 27038 of FED-STD-595.

3.6 Performance.

3.6.1 External components. - External components and assemblies such as carrying handles, latches, hinges and other attached items shall be correctly positioned, firmly secured, and function without interference.

3.6.2 Cover assembly. - Cover assembly shall provide a uniform alignment to case body assembly and shall open and close freely without interference.

3.7 Environmental.

3.7.1 Fungus resistance. - The ABS plastic shell material shall meet fungus resistance requirements of Procedure I of MIL-E-5272.

3.7.2 Impact resistance (ambient temperature). - The assembled carrying case shall show no evidence of cracking, chipping or delamination when dropped from a height of 30 inches. The carrying case shall then be tested for being watertight.

3.7.3 Operating temperature. - Cases shall meet the functional requirements of 3.6 while exposed and thermally stabilized at ambient temperatures of plus 150 degrees and minus 40 degrees Fahrenheit.

3.7.4 Watertight. - The carrying case shall be capable of maintaining a watertight closure when submerged under a head of 3 feet of water for a period of two (2) hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. - Carrying cases fabricated to the requirements of this specification, shall be in accordance with proven commercial forming techniques and shall be free of defects that might affect strength, serviceability and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The quality assurance provisions of this specification and of other documents referenced herein form the basis for inspection to be performed by the supplier. Inspection of components and subassemblies not covered by specifications shall be in accordance with 4.3.2. Definitions of inspection terms not otherwise defined herein shall be as listed in MIL-STD-109.

4.2 Initial production sample. - The initial production samples specified in 3.1.1 shall be submitted for inspection by the contractor under the surveillance of the Government. This inspection shall be conducted at the contractor's facility, or Government approved laboratory, using test equipment authorized for use on the contract. The samples shall be inspected for all requirements of this specification by utilizing examination and testing methods prescribed herein.

4.2.1 Disposition of rejected initial production samples. Should the initial production sample specified in 3.1.1 fail to pass the test for Government acceptance, production of those components causing rejection will cease until the defective characteristics have been corrected in the process used to produce the initial production sample. When corrections in the process have been made, new samples shall be submitted, examined and tested by the contractor under the surveillance of the Government. Acceptance of production lots will not commence until acceptable initial production samples are submitted and corrective actions have been taken to eliminate deficiencies.

4.3 Inspection provisions.

4.3.1 Inspection lot. - Unless otherwise specified by the contracting officer, inspection lot size, formation, and presentation of lots shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

4.3.2 Examination and tests. - Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a defect (individual characteristics) basis in accordance with MIL-STD-105, and the inspection level and sampling plans specified in Table II titled (Classification of Defects). The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot. The Government reserves the right to inspect for any applicable requirement, and to reject individual non-conforming items.

TABLE II CLASSIFICATION OF DEFECTS

Use Inspection Level II of Table I with Sampling Plan Table II-A of MIL-STD-105

	REQUIREMENT	TEST PROCEDURE
CRITICAL: NONE		
MAJOR: AQL 1.5%		
101. Certification of materials	3.2	Visual
102. Improper forming	3.3.2	Visual
103. Sealing extrusion improperly formed, poor joints, welding, improperly finished	3.3.3 3.3.3.1	Visual
104. Improper bonding of extrusion	3.3.3.2	Certification, Visual
105. Improper fasteners,hinges assembled to case	3.3.4 3.3.5	SME & Visual
106. Improper handle,improperly assembled	3.3.6	Visual
107. Improper gasket,improperly secured	3.3.7	Visual
108. Improper breather valve	3.3.8	Visual
109. Incorrect decal	3.3.8.1	Visual
110. Improper clasp assembly,improperly assembled to case	3.3.9	Visual & SME
111. Cushion not fabricated to figures or bonded in position properly	3.4.1	Visual, Tactile
112. Marking incorrectly applied	3.5	Visual
113. Improper fit, interference or binding of covers, latches, gaskets	3.6.1 3.6.2	Visual
MINOR: AQL 2.5%		
201. Color match	3.2.1	Visual
202. Excess adhesive on gasket	3.3.7	Visual

4.3.3 Disposition on non-conforming product. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:20Z
Check the source to verify that this is the current version before use.

4.4 Control tests.

4.4.1 General. - One case assembly shall be selected at random as a control sample from entire lot. The control sample shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.1 - 3.5	SME - Visual - Figures 1, 2, 3, 4, 5, 6, 7 and 8
302. Workmanship	3.8	Visual - Figures 1, 2, 3, 4, 5, 6, 7 and 8

4.4.2 Environmental and functional. - Two cases shall be selected at random as control samples from entire lot. The control samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
303. Impact resistance	3.7.2	4.6.3
304. Watertight	3.7.4	4.6.1
305. Performance	3.6.1	4.7.1
	3.6.2	4.7.2

4.4.3 Control test failure. - Should any one item of a control test sample fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved.

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall maintain all required measuring and testing equipment in accordance with the applicable requirements specified in MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.5.1 Government furnished inspection equipment. - Where the contract provides for Government furnished test equipment, care and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:20Z
Check the source to verify that this is the current version before use.

4.5.2.1 Contractor design. - The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 and with the "Component Inspection" requirements of MIL-F-13926. Concept, construction, materials, dimensions and tolerance used in design of test equipment shall be so selected and controlled as to insure that the test equipment will permit positive rejection of a product which exceeds the prescribed tolerance limit, and will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit. Construction shall be such as to facilitate routine calibration of the equipment.

4.5.2.2 Equipment to perform extreme temperature tests. - The test equipment shall be in accordance with the pertinent values and tolerances governing the environmental test conditions and measurements contained in MIL-F-13926 for "Test facilities" and shall be capable of providing the temperature extremes of 3.7.3.

4.5.2.3 Preparation for tests. - The initial production sample shall be fitted with actual items or simulated dummy loads furnished by the Government, representing the weight and mass of items listed in 6.1.

4.6 Test methods and procedures.

4.6.1 Watertight. - All carrying case assemblies fabricated and assembled in accordance with the requirements of this specification shall be tested as follows:

The case assembly with breather valve removed, and aperture sealed with gasketed fitting, shall be submerged in a vessel under a head of 3 feet of water in accordance with MIL-STD-108, Table II, Class b. The case assembly shall be submerged for a period of 2 hours. The case shall be thoroughly dried externally prior to removal of cover. There shall be no evidence of water penetration.

4.6.2 Fungus resistance. - Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. At the completion of the test period any growth or fungus which would impair the function of the case or any profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their sheet material has been tested by above procedure and is fungus resistant. Test data accumulated from prior testing shall be furnished with certification.

4.6.3 Impact resistance (ambient temperature). - The case sample fitted with dummy load shall be subjected to a 30 inch flat drop, once on the top and once on the bottom and then shall be subjected to the watertight test specified in 4.6.1.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:20Z
Check the source to verify that this is the current version before use.

4.6.4 Operating temperature. - The operating temperature test consists of exposing the carrying case to the temperatures indicated in 3.7.3 by means of equipment complying with the requirements of 4.5.2.2. The test shall be conducted in accordance with Procedure II of MIL-F-13926, and the temperature conditions of 3.7.3 shall apply. While exposed to these temperatures, the case shall meet the requirements specified in 3.6.1 and 3.6.2. The operability test shall be conducted on the control test sample (4.4.2) only.

4.7 Performance.

4.7.1 External components. - Operability of these devices ahall be checked by a functional and visual examination when engaged and disengaged a minimum of 5 times to determine compliance with the requirements specified in 3.6.1.

4.7.2 Cover Assembly. - The case shall be operable as specified in 3.6.2 when subjected to a functional examination by opening and closing the case at least five times and subsequently visually examining the components for defects or poor workmanship.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing. - Unless otherwise specified the cases shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking. - Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - The case assembly defined herein is designed for normal carry and incorporates features to permit use as a "back-pack". The case assembly will accommodate the following items:

(1) Periscope, Battery Command: M43
(1) Accessory Kit
(1) Cover
(1) Mount, Battery Command Periscope: M141 w/3 Stake Pins
(1) Wrench, Socket
(2) Harness
(1) Light, Instrument, M53
(1) Clamp, Loop
(1) Connector, Plug, Electrical
(4) Batteries

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:20Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Applicable stock number.

6.3 Definitions

6.3.1 Standard measuring equipment (SME). - Standard measuring equipment (SME) includes the common hand type measuring devices which are usually stocked by commercial supply houses for ready supply shelf items, and which are normally used by an inspector to prepare dimensional inspection of items under procurement. This category also includes commercial testing equipment.


6.3.2 Tactile. - Skillfull manipulation or sensing.

Custodian:
Army - MU


Preparing Activity:
Army - MU

Project No. 1240-A453Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

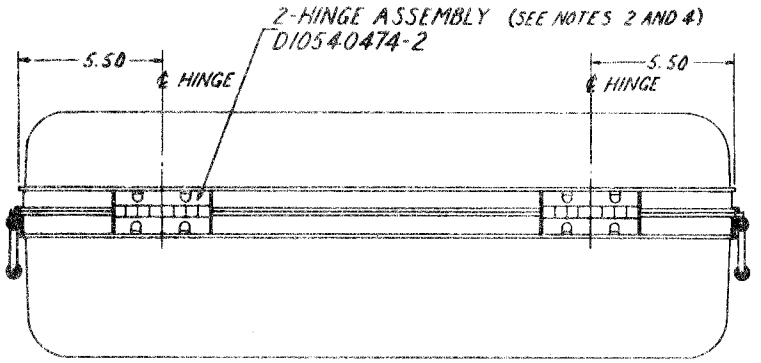


REAR VIEW

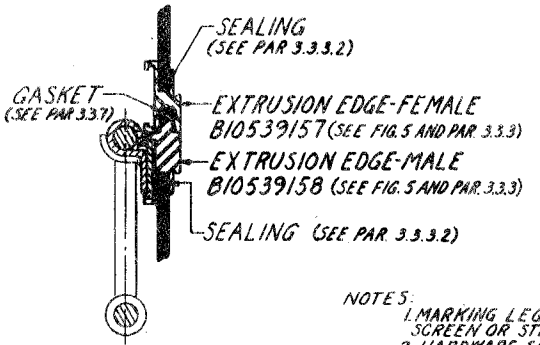


SECTION A-A

NOTES:
1. MARKING LEGEND SHALL BE APPLIED BY SILK SCREEN OR STENCIL AS SPECIFIED IN PAR. 3.5.
2. HARDWARE SHALL BE INSTALLED IN RELATIVE POSITION AND PERMANENTLY ATTACHED TO EDGE FRAME AS SHOWN ON FIGURE 2.
3. ALL PRODUCTION CASES SHALL BE TESTED FOR BEING WATER TIGHT IN ACCORDANCE WITH PAR. 3.7.4.
4. PEEN OR STAKE EACH END OF HINGE PIN.
5. TOLERANCE:
DECIMALS ±.06

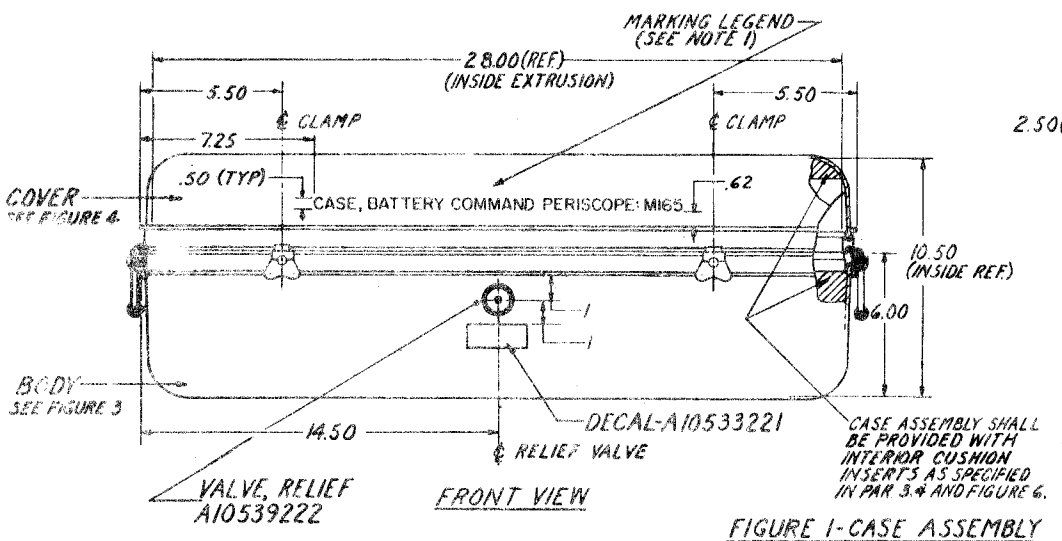

FRONT VIEW

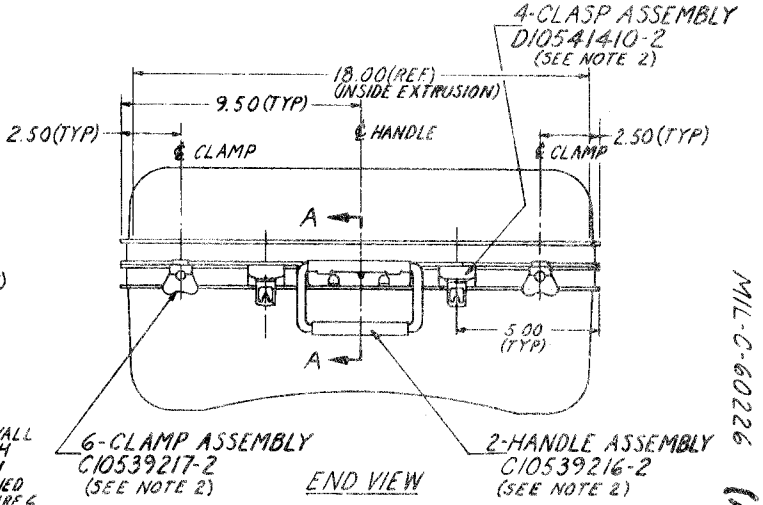



END VIEW


FIGURE 1-CASE ASSEMBLY


MIL-C-60226 (MU)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

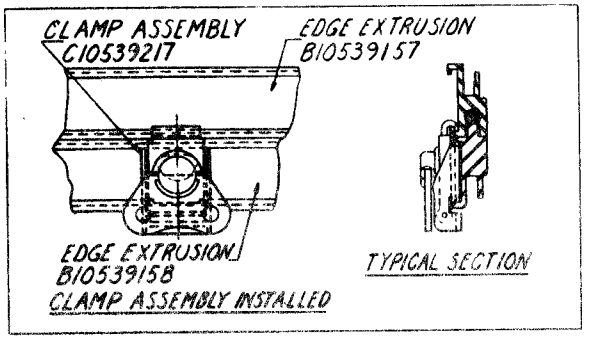

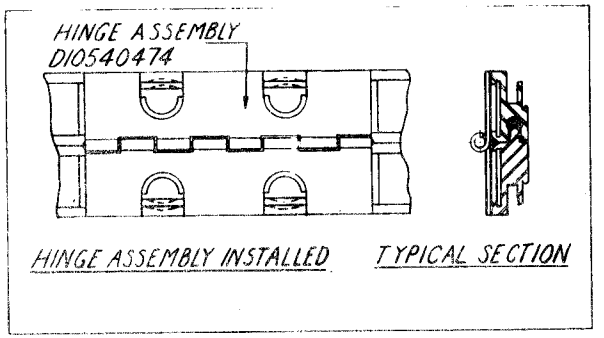

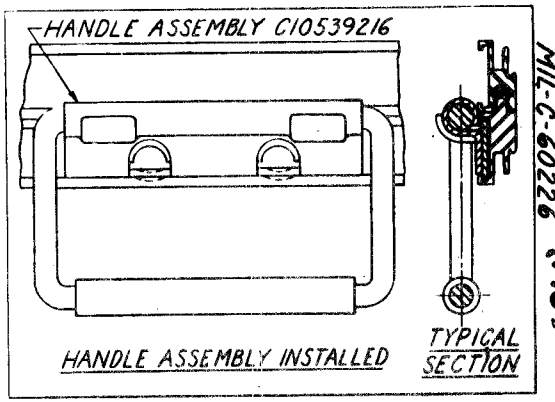

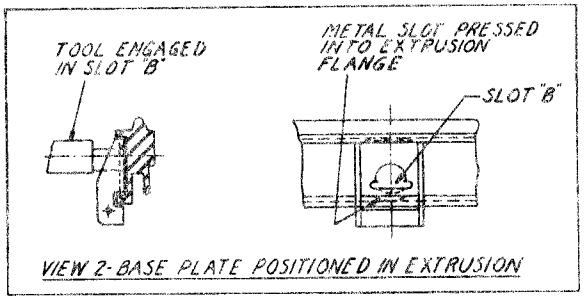

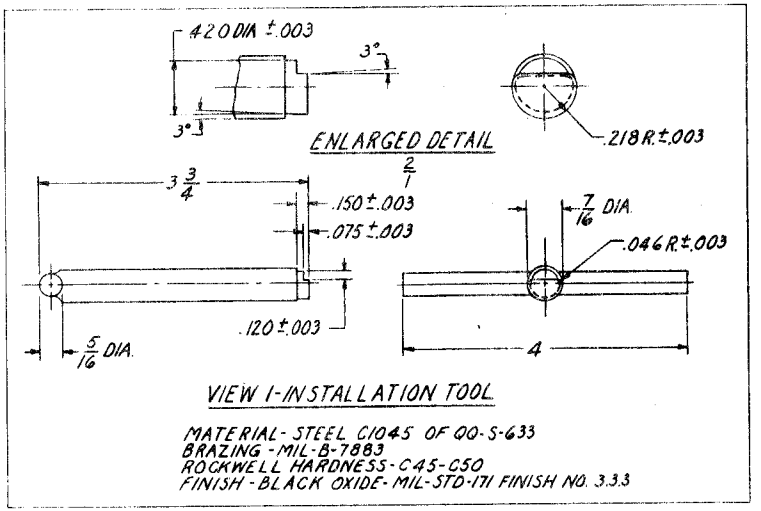

INSTALLATION PROCEDURE

1. LOCATE CLAMP, HINGE, HANDLE OR CLASP ASSEMBLIES AS REQUIRED, IN POSITION AS SHOWN ON FIGURE 1.
2. POSITION BASE PLATE IN EXTRUSION FLANGE.
3. ENGAGE INSTALLATION TOOL (VIEW 1) INTO SLOT "B" AS SHOWN IN VIEW 2.
4. FIRMLY PRESS TOOL DOWNWARD AND TURN TOOL 90° TO THE RIGHT AND 90° TO THE LEFT TO DEFORM SLOT OF BASE PLATE IN EXTRUSION FLANGE AS SHOWN IN VIEW 2.

FIGURE 2-INSTALLATION OF HARDWARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR 3.2
   STARTING THICKNESS .187
   COLOR-OLIVE DRAB, COLOR NUMBER X24087
   OF FED-STD-595
   FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
   HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)

   FORMED WALL THICKNESS $.120^{+.020}_{-.030}$

2. TOLERANCE: UNLESS OTHERWISE SPECIFIED
   DECIMALS $\pm .03$
   ANGLES $\pm 1°$

SUGGESTED MATERIAL SOURCES:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-1211-CPA-1492
OR
BOLTA PRODUCTS DIVISION OF
GENERAL TIRE AND RUBBER CO.
LAWRENCE, MASS.
BOLTARON SERIES-6000-X4043


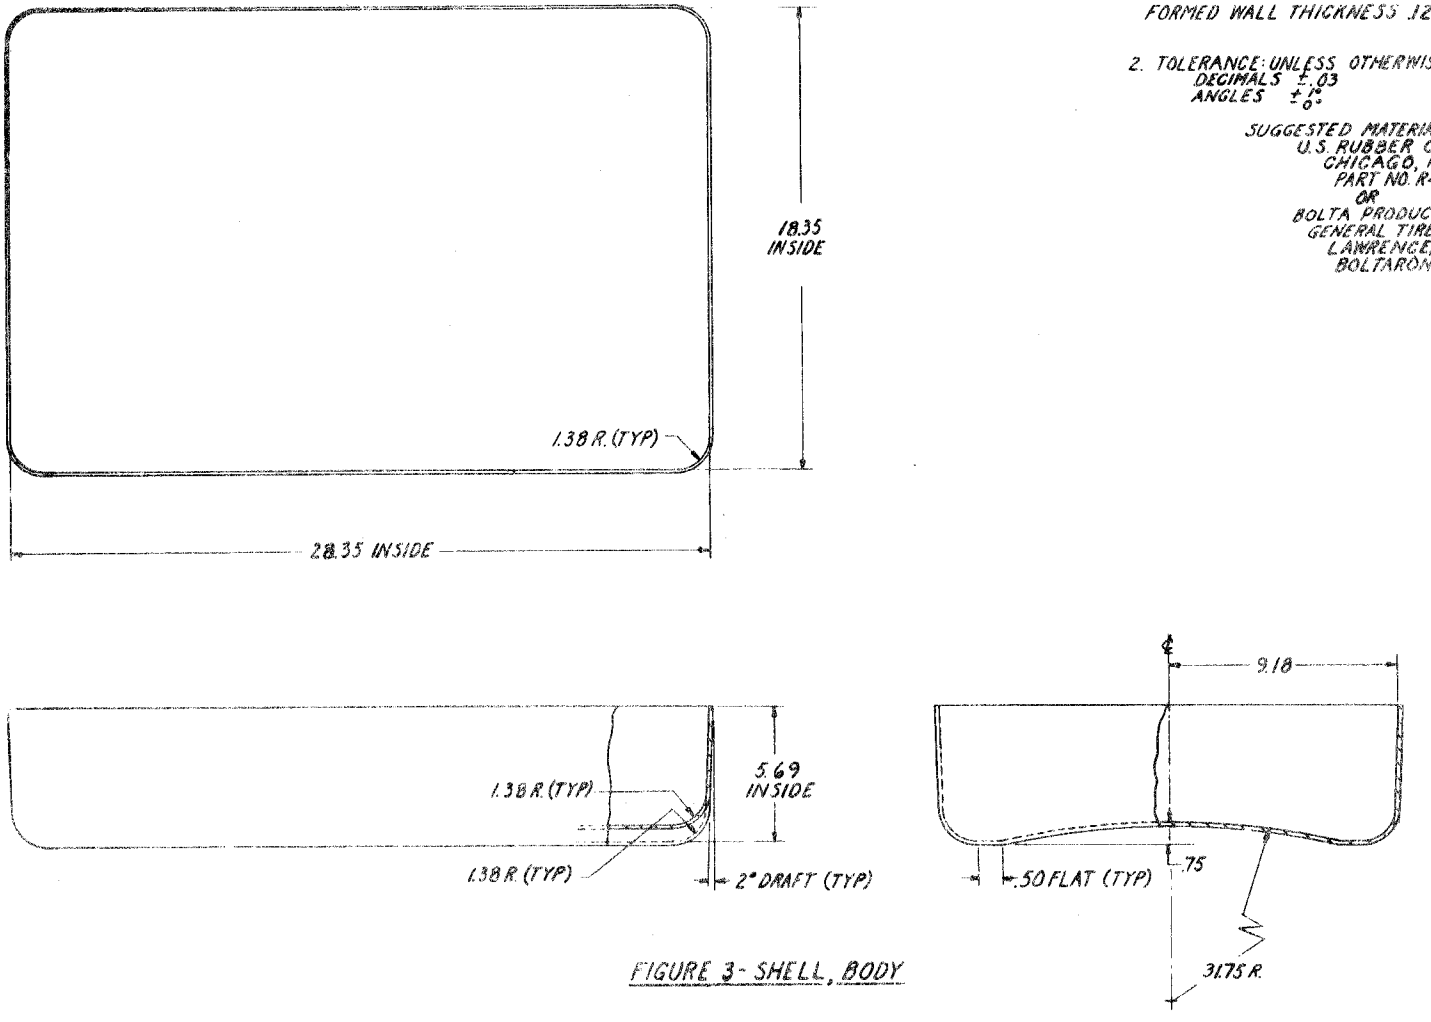


FIGURE 3 - SHELL, BODY

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:20Z
Check the source to verify that this is the current version before use.

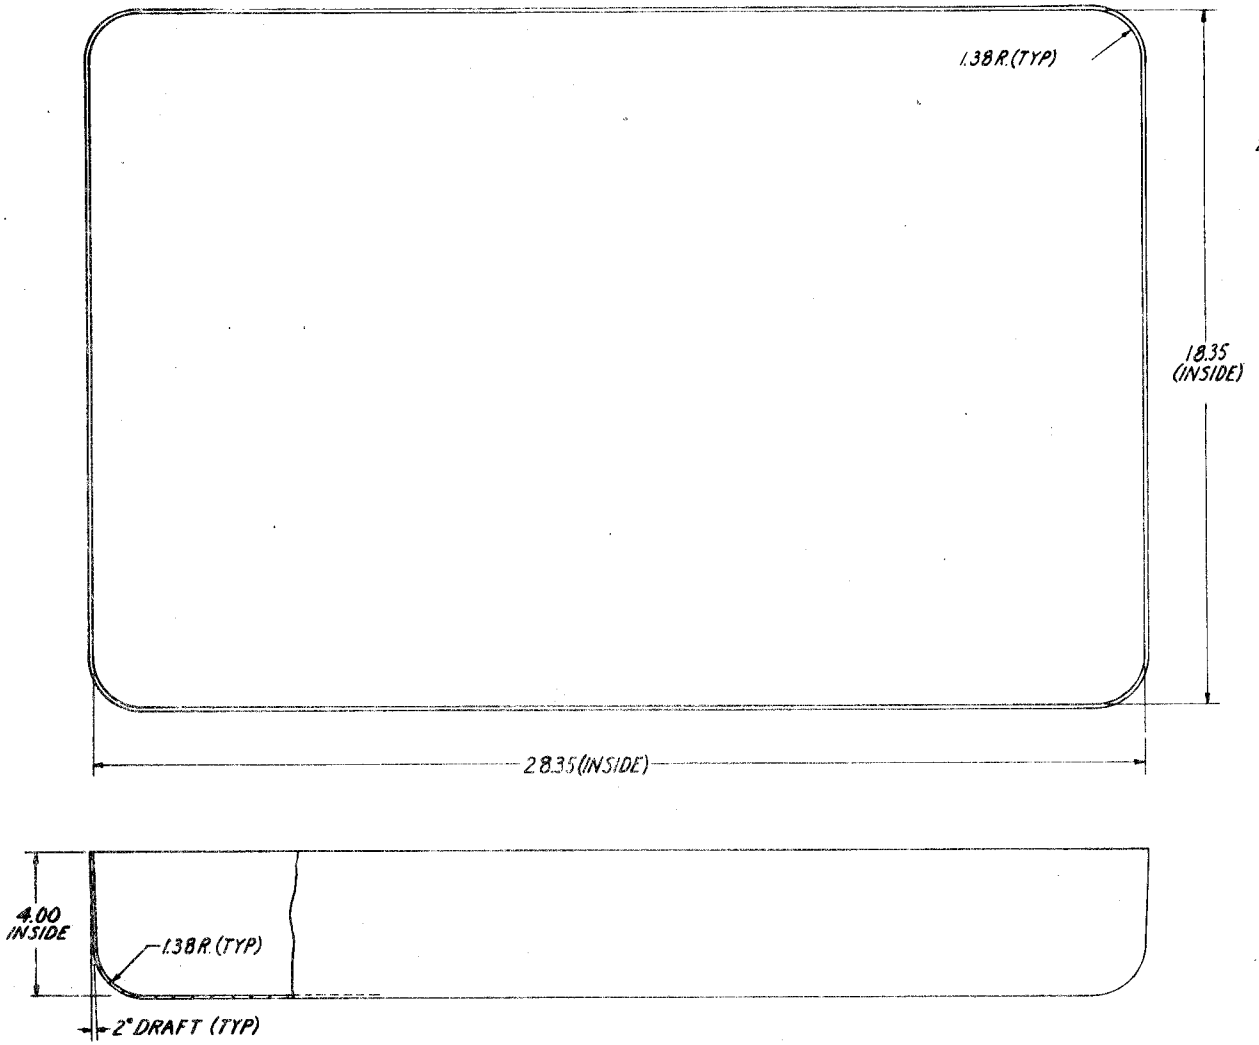

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2.
   STARTING THICKNESS .187
   COLOR - OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
   FINISH - HAIRCELL GRAIN (EXTERIOR SURFACE)
   HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
   FORMED WALL THICKNESS .120 $^{+.020}_{-.030}$

2. TOLERANCE: UNLESS OTHERWISE SPECIFIED -
   DECIMALS ± .03
   ANGLES $^{+1°}_{0}$


SUGGESTED MATERIAL SOURCES:
U. S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-1211-CPA-1492
OR
BOLTA PRODUCTS DIVISION OF
GENERAL TIRE AND RUBBER CO.
LAWRENCE, MASS.
BOLTARON SERIES-6000-X4043


FIGURE 4 - SHELL COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. COMPLETED EDGE FRAMES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION A-A.
2. MUST MATCH SHELLS SHOWN ON FIGURES 3 AND 4.
3. EDGE FRAMES SHALL BE FORMED, WELDED, ALODIZED AND FINISHED IN ACCORDANCE WITH PAR. 3.3.3 AND 3.3.3.1.

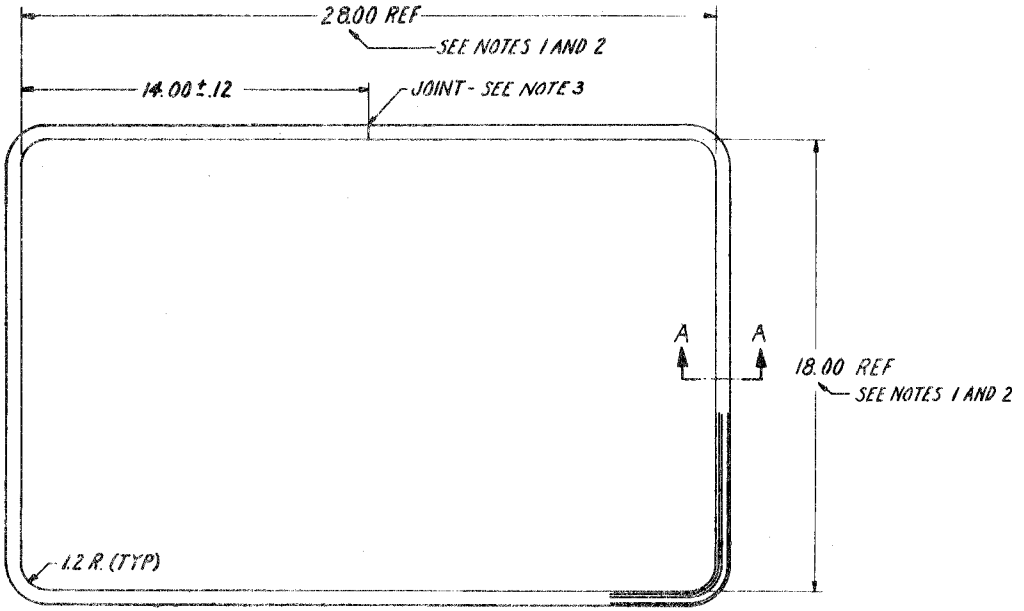

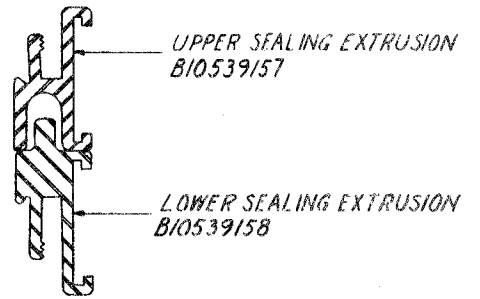

SECTION A-A

FIGURE 5- EDGE FRAME ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTE:
1. CUSHION INSERTS SHALL BE BONDED IN RELATIVE POSITIONS AS SHOWN WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II


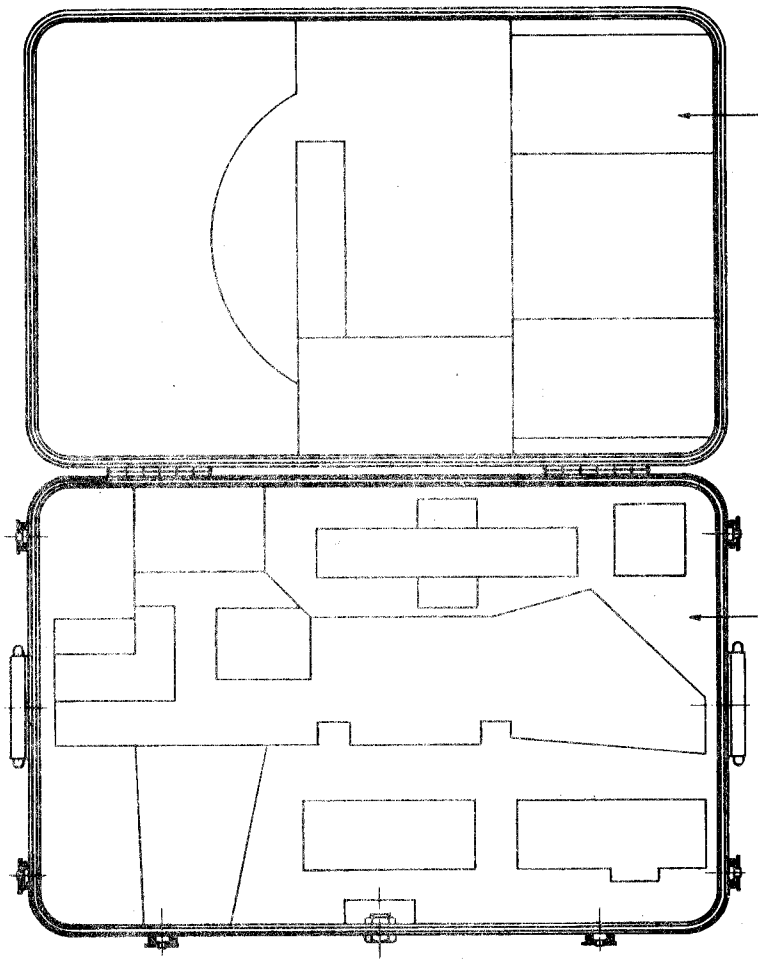


FIGURE 6-INTERIOR CUSHION ARRANGEMENT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

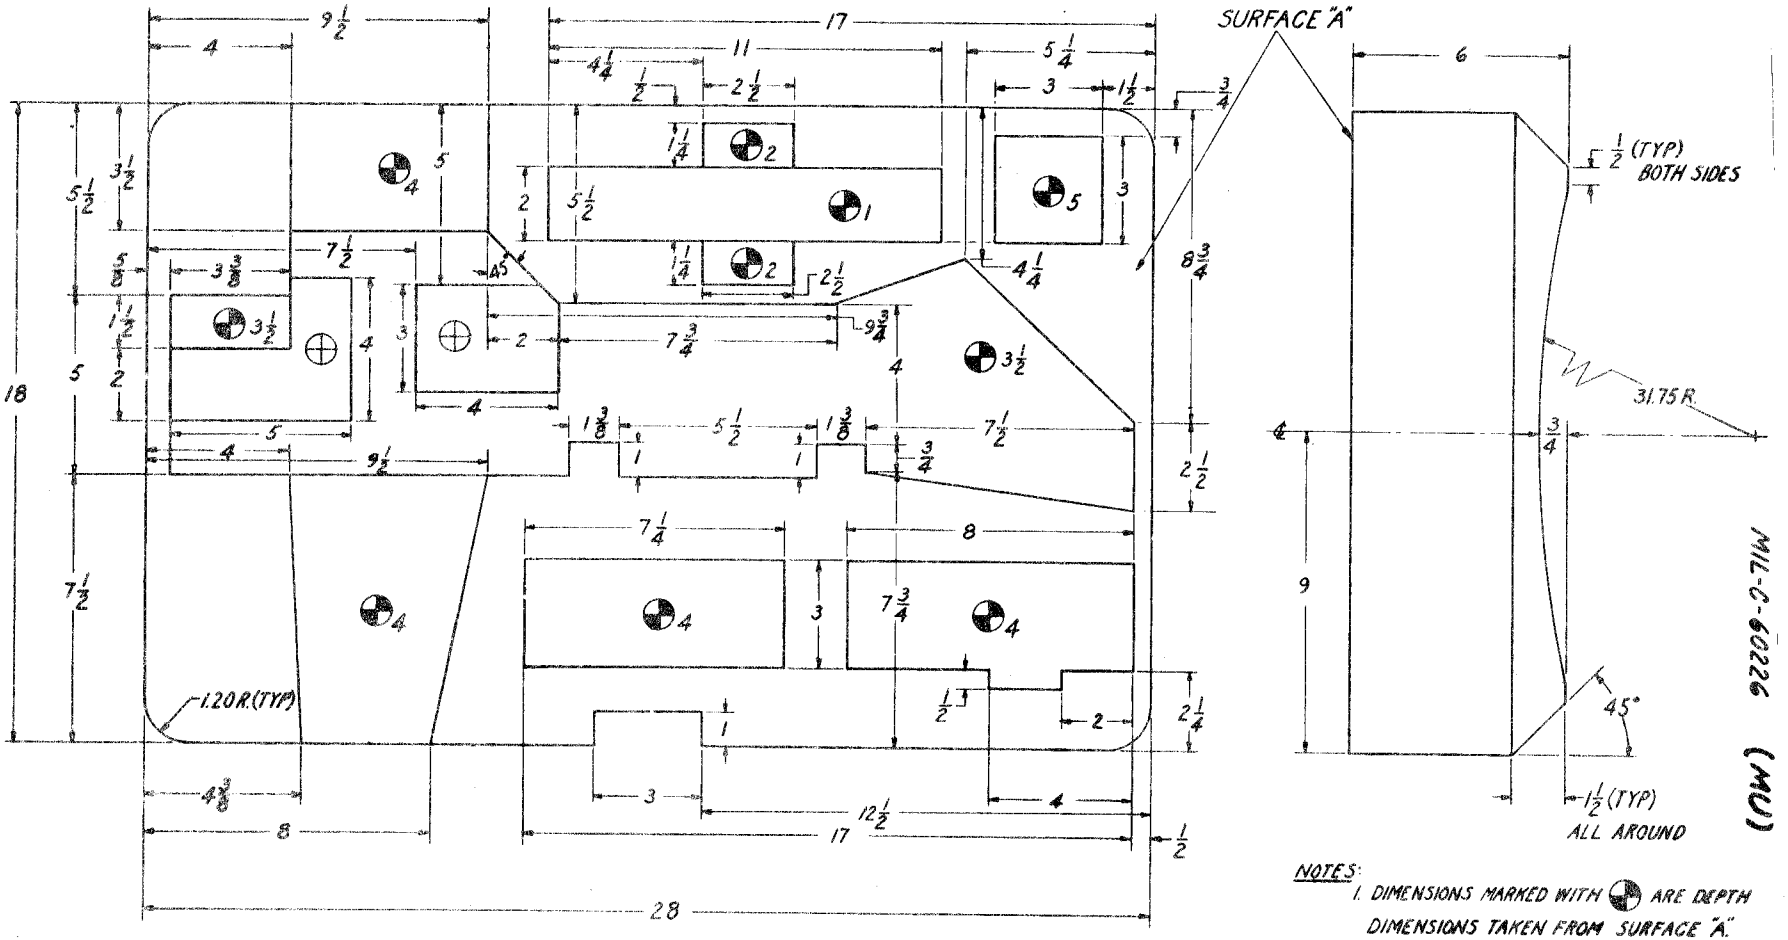


NOTES:
1. DIMENSIONS MARKED WITH ⊕ ARE DEPTH DIMENSIONS TAKEN FROM SURFACE "A".
2. AREA MARKED ⊕ ENTIRELY CUT OUT.
3. CUSHION INSERT SHALL BE FABRICATED OF POLYETHYLENE FOAM - 2 LBS/CUBIC FOOT DENSITY, COLOR CHARCOAL.
4. INSERT SHALL BE FABRICATED BY FUSION BONDING WITH HEAT APPLICATION.
5. TOLERANCE: FRACTIONS ± 1/16 ANGLES ± 1°

FIGURE 7 - LOWER CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

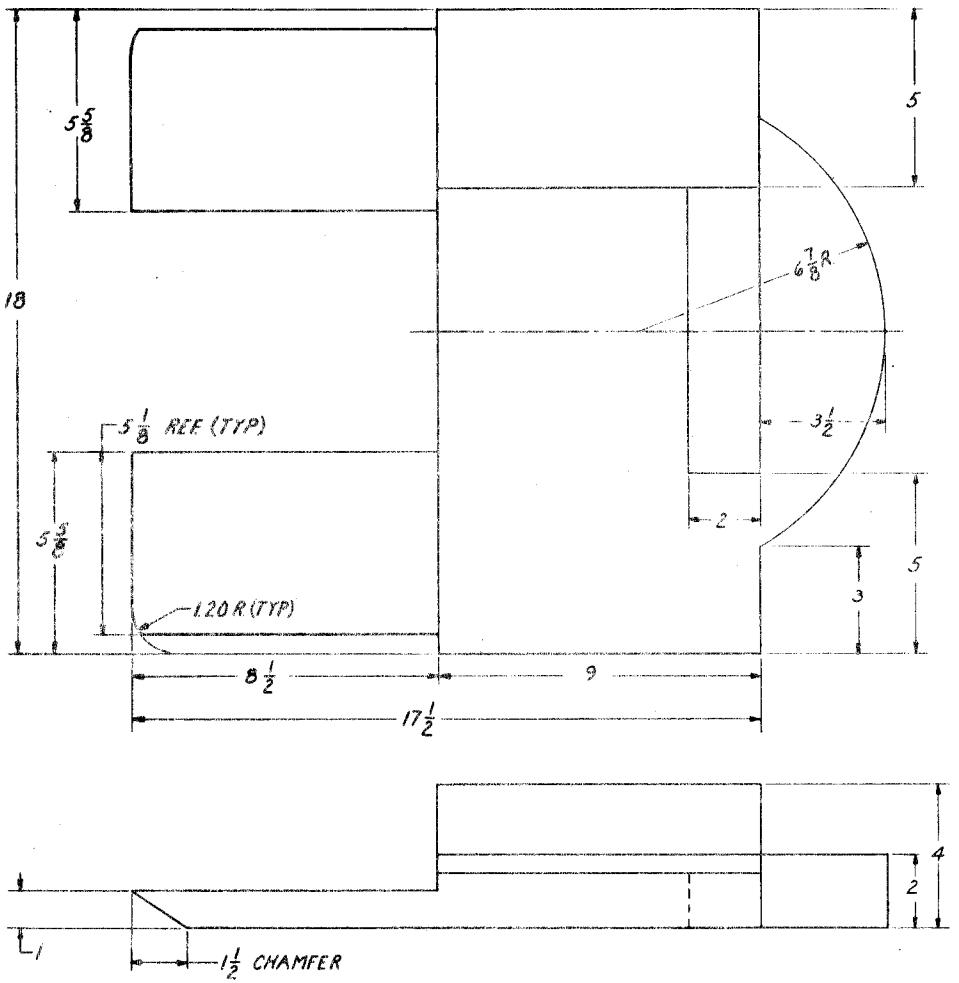

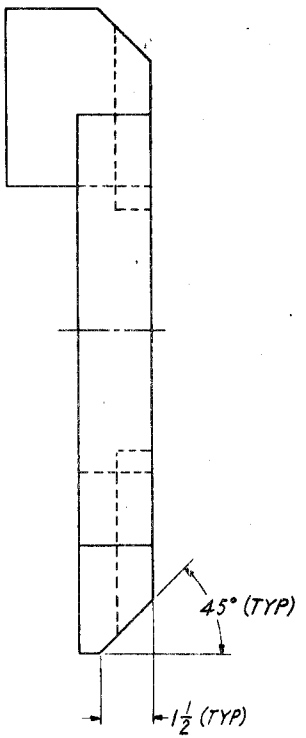

NOTES:
1. CUSHION INSERT SHALL BE FABRICATED OF POLYETHYLENE FOAM - 2 LBS/CUBIC FOOT DENSITY. COLOR - CHARCOAL.
2. INSERT SHALL BE FABRICATED BY FUSION BONDING WITH HEAT APPLICATION.
3. TOLERANCE:
   FRACTIONS ± 1/16
   ANGLES ± 1°

FIGURE 8 - CUSHION HOLD DOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.