MIL-C-60228A(MU)
19 August 1968
SUPERSEDING
MIL-C-60228(MU)
24 June 1965

MILITARY SPECIFICATION

CONTAINER, SHIPPING, REUSABLE: 8566360

1. SCOPE

1.1 This specification covers the fabrication and testing of one type reusable shipping container for Radar Chronograph 10525300 w/Mount 10512507 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-E-529	Enamel, Alkyd, Semi-Gloss

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5092	Adhesive, Rubber, Synthetic and Reclaimed Rubber Base
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment, and Tools for Army Materiel, Packaging and Packing of
MIL-C-21567	Compound, Silicone, Soft Film
MIL-I-26860	Indicator, Humidity, Plug, Color Change
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MIL-STD-417	Rubber Compositions, Vulcanized, General Purpose, Solid (Symbols and Tests)
MS16535	Rivet, Tubular Oval Head

DRAWINGS

U.S. Army, Frankford Arsenal

A10533221	Plate, Valve Instruction
A10539222	Valve, Relief
A10555906	Primer, Silicone, Adhesive
B8246019	Card Holder
B10533212	Backing, Plate
B10553941	Extrusion, Male
B10553942	Extrusion, Female
B10555904	Adhesive, Silicone
C10511987	Handle
C10556000	Latch Assembly

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

(Copies of tests may be obtained from American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 General.- The container assembly shall provide a pressure tight closure capable of protecting equipment against environmental conditions normally encountered during storage and shipment. The container shall be fabricated and assembled in accordance with the requirements specified herein and Figures 1, 1A, 2, 3, 4, 5, and 6.

3.2 Material.- Material used for forming container shells and cradles shall be pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used shall be virgin stock and shall be capable of passing the fungus resistance requirements specified in 3.2.3. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

TABLE I

REQUIREMENTS FOR ABS PLASTIC SHEET

	ASTM METHOD*	
Tensile strength, Min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), min. ft. lb. per inch of notch	D256 Method A	
23° ± 2°C (73.4° ± 3.6°F)		5.5
-40° ± 2°C (-40° ± 3.6°F)		2.0
Specific gravity		
Min.	D792	1.0
Max.	Method A	1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

D256 Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543 Test for Resistance of Plastics to Chemical Reagents
D638 Test for Tensile Properties of Plastics
D648 Test for Deflection Temperature of Plastics Under Load
D785 Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792 Tests for Specific Gravity and Density of Plastics

3.2.1 Color.- Material for forming container shells shall be olive drab conforming to Color X24087 of FED-STD-595. Color match comparison shall be made on the smooth surface. Unless otherwise specified, material swatch shall be submitted for approval prior to production (see 6.2).

3.2.2 Finish.- Material for container shells shall have a hair cell grain on the exterior surface and a smooth surface on the interior surface.

3.2.3 Fungus resistance.- The material used for forming container shells shall show no evidence of damage, deterioration or profuse growth following an incubation period of 28 days after inoculation of surfaces with a mixed spore suspension, when tested in accordance with Procedure I of MIL-E-5272.

3.3 Fabrication.

3.3.1 Forming process.- The upper and lower shells shown in Figures 2 and 3 and the cradle shown on Figure 5 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes, with no vacuum vent or thermal shock stress marks visible on outside surfaces of formed piece. Machined surfaces of shells shall be free of rough or pitted areas, shall be notch free, and machined to allowable maximum thickness as specified on Figures 2 and 3.

3.3.2 Sealing extrusions.- The upper sealing extrusion (male) shall conform to Drawing B10553941 and the lower sealing extrusion (female) shall conform to Drawing B10553942. The extrusions shall be formed to mate with container shells by proven techniques and controlled tooling to provide uniformity in flatness and alignment as shown on Figure 4. Suitable flexible inserts shall be used to prevent distortion of cross sectional shape of extrusions and prevent chatter or cracking. The upper and lower extrusions shall be joined by butt welding which shall be ground smooth and exhibit soundness of good practices conforming to the requirements of MIL-W-8604.

3.3.2.1 Finish.- The formed extrusions shall be surface treated by Finish No. 7.3.2 followed by Paint Finish No. 21.3 of MIL-STD-171, Color X24087 of FED-STD-595. Finish shall be applied prior to assembly of extrusions to container shells.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

3.3.2.2 Extrusion attachment.- The sealing extrusions shall be attached to the container shells with an air curable adhesive sealant, conforming to Drawing B10555904 and Primer, Drawing A10555906. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure-tight joint. Minimum cure time for sealant is twenty-four (24) hours.

3.3.3 Latches.- Ten (10) latches conforming to Drawing C10556000 shall be located and secured to lower sealing extrusion as shown on Figure 1. The latch incorporates a spring detent in the base plate which engages into provided offset in sealing extrusion when the latch is positioned into the extrusion rail. Stake the extrusion rail in two (2) places to prevent lateral movement of latch base plate. Each latch shall be properly adjusted and cotter pinned to assure uniform pressure on sealing gasket. Touch-up paint shall be applied to stake marks with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.3.1 Latch finish.- Latches shall be finished prior to assembly to container by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595.

3.3.4 Handles.- A total of four handles (2 each end) conforming to Drawing C10511987 shall be assembled and riveted to container with back-up plates conforming to B10533212 as shown on Figure 1. Rivets shall conform to MS16535, .188 diameter, steel, length as required, and shall secure handle in a manner so as to provide a pressure tight attachment. Handles shall be painted by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595. Paint finish shall not be applied to Hycar rubber on handle. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.5 Sealing gasket.- Gasket shall be fabricated of rubber 7/16 O.D. by 5/16 I.D. in accordance to the requirements of MIL-R-3065; Type S, Class SC, Grade No. SC415 A_1 B_1 F_2K of MIL-STD-417. The gasket shall be formed by vulcanizing or butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female sealing extrusion, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The exposed gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.3.6 Card holders.- Two (2) card holders shall be assembled to the front side of the assembled container as shown on Figure 1. The card holders shall conform to Drawing B8246019-1 and B8246019-2. Each card holder shall be secured to the container by seven rivets conforming to MS16535, .123 diameter, steel, length as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

3.3.7 Relief valve.- A two way automatic relief valve conforming to Drawing A10539222 shall be assembled to the container as shown on Figure 1.

3.3.7.1 Valve instruction plate.- Valve instruction plate conforming to Drawing A10533221 shall be installed above relief valve as shown on Figure 1.

3.3.8 Humidity indicator.- A humidity indicator plug conforming to MIL-I-26860, Type II, aluminum, shall be installed on opposite end of cover from relief valve.

3.4 Interior arrangement.- The interior cushion arrangement consists of upper and lower cushion cradle assemblies, as shown on Figure 1A.

3.4.1 Cushions.- Two (2) cushions shall be molded as shown on Figure 6. The cushions shall be molded of material conforming to MIL-P-26514, polyether formulation, 4 to 4.5 lbs/cubic foot density. Finished inserts shall be charcoal in color.

3.4.2 Cradles.- Two (2) cradles shall be fabricated in accordance with Figure 5.

3.4.3 Bonding applications.- The upper and lower cradles shall be bonded to cushions as shown on Figure 1A. The cushion cradle assemblies shall be located and bonded within the container as shown on Figure 1A, with adhesive conforming to MIL-A-5092, Type II.

3.5 Marking.- Marking legends shown on Figure 1, shall be applied by silk screen or stencil with paint conforming to TT-E-529, Color White 27875 of FED-STD-595.

3.6 Performance requirements.- The reusable container fabricated to the requirements of this specification shall maintain a positive pressure of $1 \pm .1$ psi without loss of pressure.

3.7 Environmental.

3.7.1 Storage.- The container assembly shall be capable of maintaining dimensional and structural integrity when subjected to temperature extremes of 150°F to -80°F. The container shall show no evidence of distortion, cracks or delamination and shall remain pressure tight.

3.7.2 Impact resistance (ambient temperature).- The assembled container shall show no evidence of cracking, chipping or delamination when dropped from a height of 24 inches. The container shall then be tested for being pressure tight.

3.7.3 Impact resistance (low temperature).- The container assembly shall show no evidence of cracking or fracture when subjected to low temperature conditioning at -40°F immediately followed by drop test from a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

height of 18 inches. The container shall then be tested for being pressure tight, after container is conditioned at ambient temperatures.

3.8 Workmanship.- Containers fabricated to the requirements of this specification shall be in accordance with proven commercial forming techniques with minimum machining or routing of shells and shall be free of defects that might affect strength, serviceability, and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of two (2) containers manufactured in the same manner using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plans specified in Table II. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL: NONE		
MAJOR: AQL 1.0% defective		
101. Improper forming of shells and cradle	3.3.1	Visual
102. Sealing extrusion improperly formed, poor joints, welding, improperly finished	3.3.2 3.3.2.1	Visual
103. Improper bonding or attachment of extrusions	3.3.2.2	Visual
104. Card holder improperly attached, improperly finished	3.3.6	Visual
105. Improper handle, improperly assembled or finished	3.3.4	Visual
106. Improper gasket, improperly secured	3.3.5	Visual
107. Improper latch or attachment to container, not finished	3.3.3 3.3.3.1	SME & Visual
108. Improper relief valve	3.3.7	Visual
109. Incorrect valve instruction plate	3.3.7.1	Visual
110. Humidity indicator improper or missing	3.3.8	Visual
111. Cushions not fabricated properly	3.4.1	Visual
112. Cradles improperly formed	3.4.2	Visual
113. Bonding of cradles and cushions within container improper	3.4.3 Fig. 1A	Visual, Tactile
114. Marking incorrectly applied, or missing	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

MINOR: AQL 2.5%	REQUIREMENT	TEST PROCEDURES
201. Color match	3.2.1	Visual
202. Excess adhesive on gasket	3.3.5	Visual

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.3.4 Certification.- Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection and shall suffice for the remainder of the production quantities, provided the manufacturing processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

No.	CHARACTERISTIC	TEST DATA TO COMPLY WITH
301.	Material	3.2, 3.2.3

4.4 Special sampling.

4.4.1 General.- Two container assemblies shall be selected at random as a special sampling from each lot produced. The samples shall have successfully met all other acceptance test specified herein, and shall then meet the following requirements and tests:

	TEST	REQUIREMENT	TEST PROCEDURE
302.	Fabrication	3.1 - 3.5	SME, Visual, Figures 1, 1A, 2, 3, 4, 5, and 6
303.	Workmanship	3.8	Visual

4.4.2 Environmental and functional. Unless otherwise specified two sample container assemblies shall be selected at random as samples from each lot produced (see 6.2). The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

	TEST	REQUIREMENT	TEST PROCEDURE
304.	Impact resistance	3.7.2	4.6.4
305.	Pressure tight	3.6	4.6.1
306.	Storage	3.7.1	4.6.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall make available inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Preparation for tests.- The sample container assembly shall be fitted with a simulated load of the same weight and mass as the Radar Chronograph w/Mount (see 6.3).

4.5.2.3.1 The relief valve shall be removed when performing storage tests in accordance with 4.6.3.

4.6 Test methods and procedures.

4.6.1 Pressure retention test.- Containers shall have the relief valve removed and replaced by an appropriate plug. A suitable connection shall be made for the introduction of air pressure. A gage shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

connected to indicate pressure within the container. Air pressure shall be applied up to 1 ± .1 pound per square inch and the intake valve closed to retain pressure. A soap solution shall be applied to all joints, seams and welds. There shall be no evidence of leakage. After five minutes the gage shall be observed to make sure that the original pressure has been maintained (see 3.6).

4.6.2 Fungus resistance.- Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. At the completion of the test period any growth or fungus which would impair the function of the container or any profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their sheet material has been tested by above procedure and is fungus resistant.

4.6.3 Storage.- The container assembly with simulated load shall be tested as follows:

(a) Elevated temperature.- The container assembly shall be placed in test chamber and the temperature elevated gradually to 150°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of 150°F for a period of 4 hours, after which the temperature shall be gradually reduced to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test. There shall be no leakage when the container is tested in accordance with 4.6.1.

(b) Low temperature.- The container assembly shall be placed in test chamber and the temperature lowered gradually to -80°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of -80°F for a period of 4 hours, after which the temperature shall be gradually raised to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test. There shall be no leakage when the container is tested in accordance with 4.6.1.

4.6.4 Impact resistance (ambient temperatures).- The sample container shall be supported at one end of its base on a sill or block 5 inches in height. The opposite end of the container shall be allowed to fall freely from a height of 24 inches. Following the drop test, the container assembly shall be subjected to the pressure retention test specified in 4.6.1.

4.6.5 Impact resistance (low temperature).- The sample container shall be placed in a test chamber and the temperature lowered gradually to -40°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of -40°F for a period of 4 hours. The container shall be immediately subjected to drop test described in 4.6.4 except the drop height shall be 18 inches. The container shall be subjected to pressure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

retention test specified in 4.6.1, after container has been stabilized at ambient temperatures.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise specified, the container shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The reusable container defined herein is intended for all types of shipment and storage. The container constitutes part of "Set Packaging for Radar Chronograph Set, M36 - Box 1 of 4" as specified on Packaging Data Sheet 10525235.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Applicable stock number
(c) Government furnished equipment
(d) Submission of materiel swatch (3.2.1)
(e) Requirement for environmental and functional tests for special samples (see 4.4.2)

6.3 Weight.- Weight of simulated load of Radar Chronograph w/Mount is 110 pounds.

6.4 Federal stock number for reusable container, Part Number 8566360, is FSN 1290-804-9408.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1290-A206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.


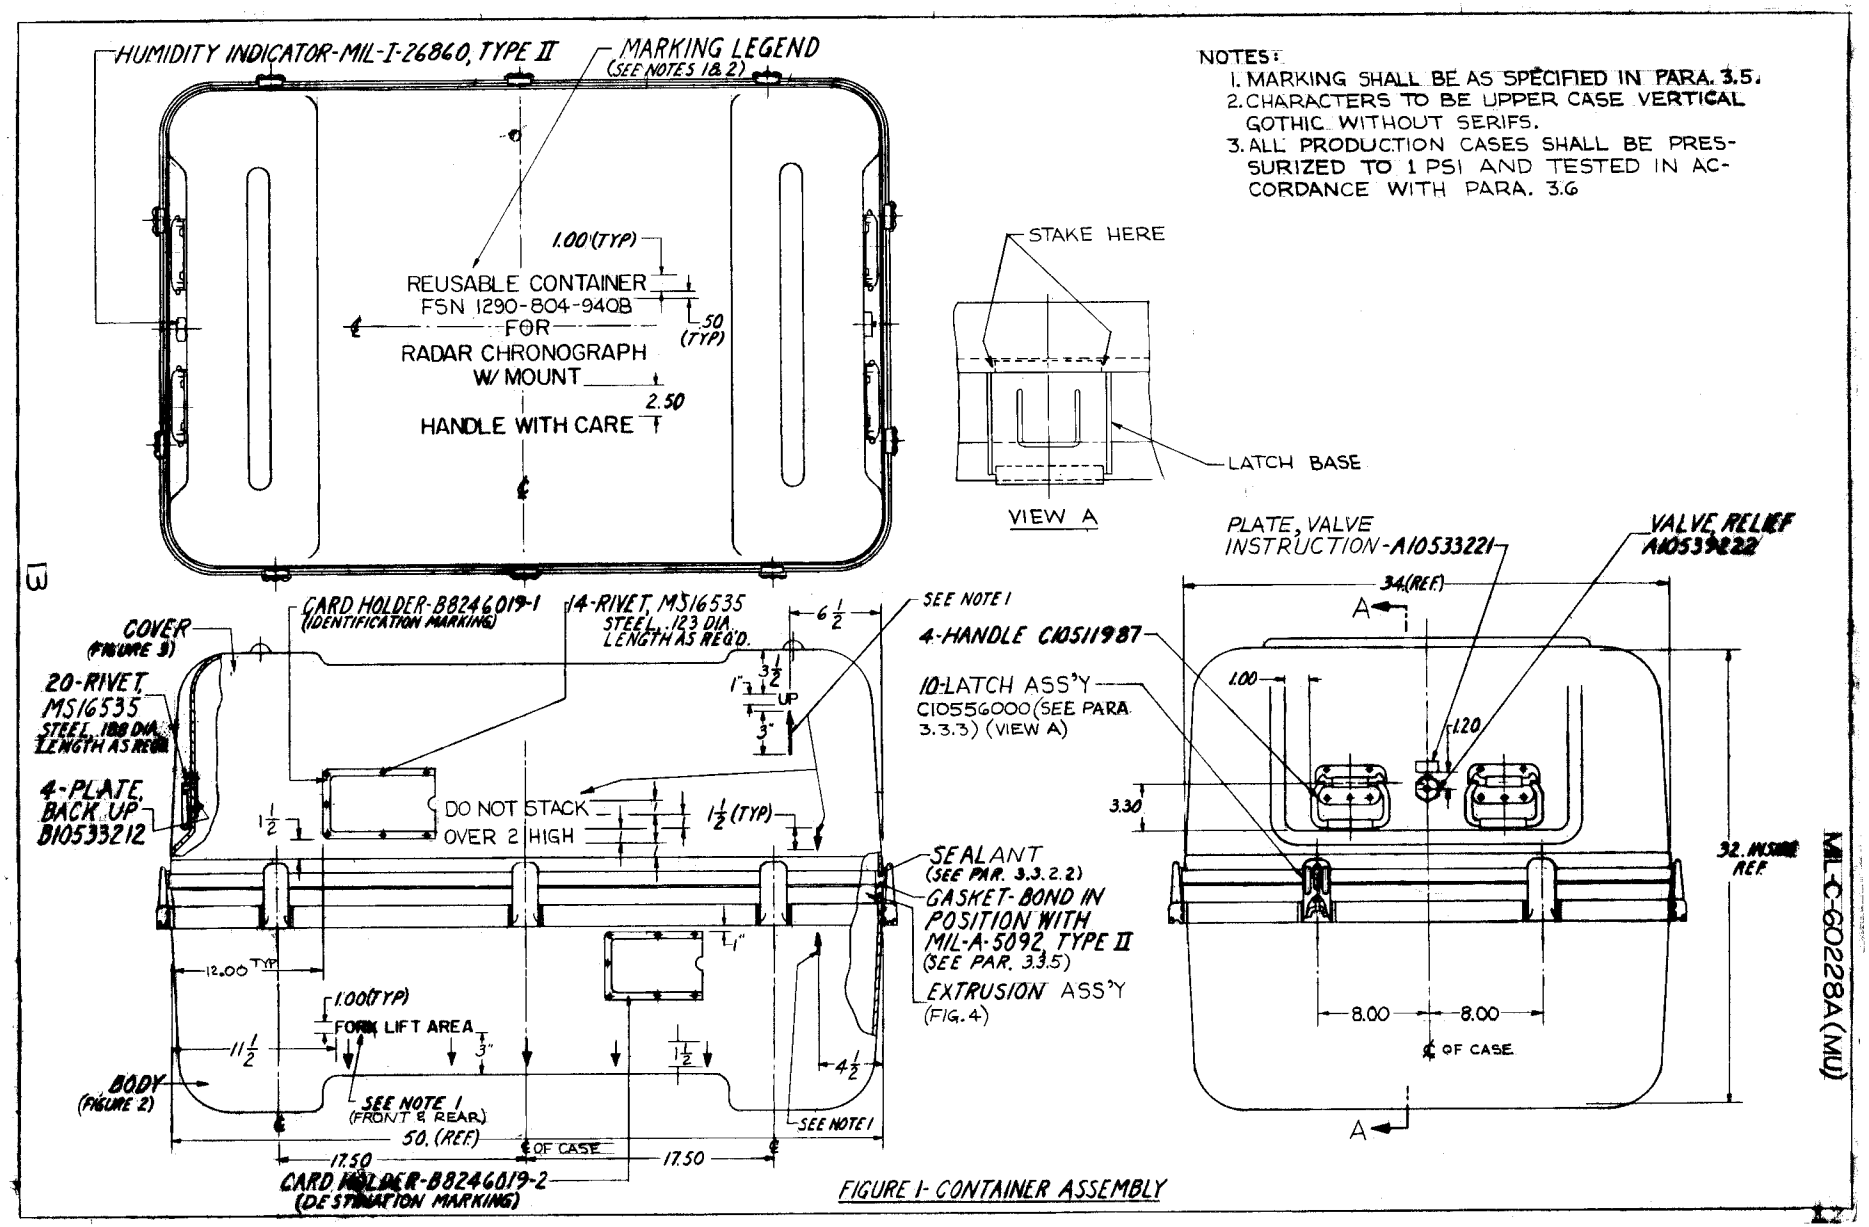


FIGURE 1- CONTAINER ASSEMBLY

MIL-C-60228A(MU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. BOND CRADLES TO CUSHIONS AND CUSHIONS TO SHELLS WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II. APPLY ADHESIVE TO ALL MATING SURFACES.

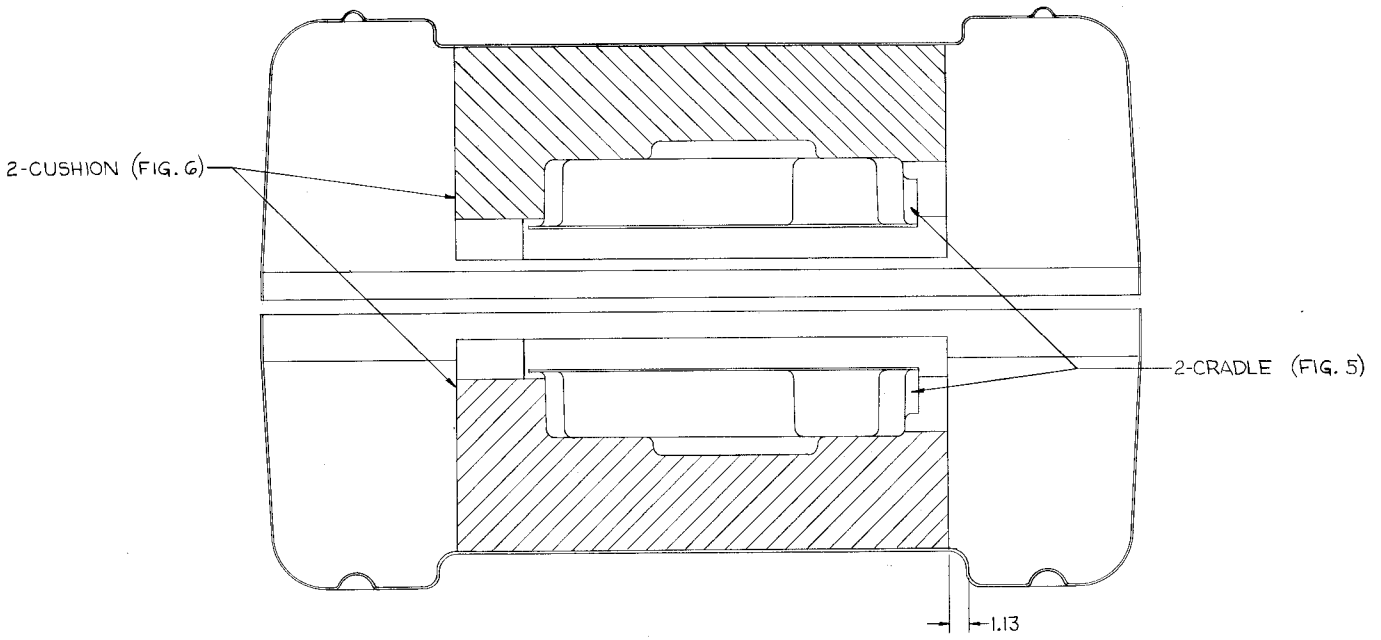


SECTION A-A (EXTRUSIONS NOT SHOWN)

FIG. 1A. INTERIOR ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06" & FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PARAGRAPH 3.2
   COLOR-OLIVE DRAB-COLOR NUMBER X24087 OF FED-STD-595
   FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
   SMOOTH (INTERIOR)
   * FORMED THICKNESS MEASURED AT TOP PORTION
   .160 +.020 -.000
3. TOLERANCE UNLESS OTHERWISE SPECIFIED
   DECIMALS .X = ±.06, .XX = ±.03
   ANGLES ±1°

SUGGESTED MATERIAL SOURCE
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA-1492

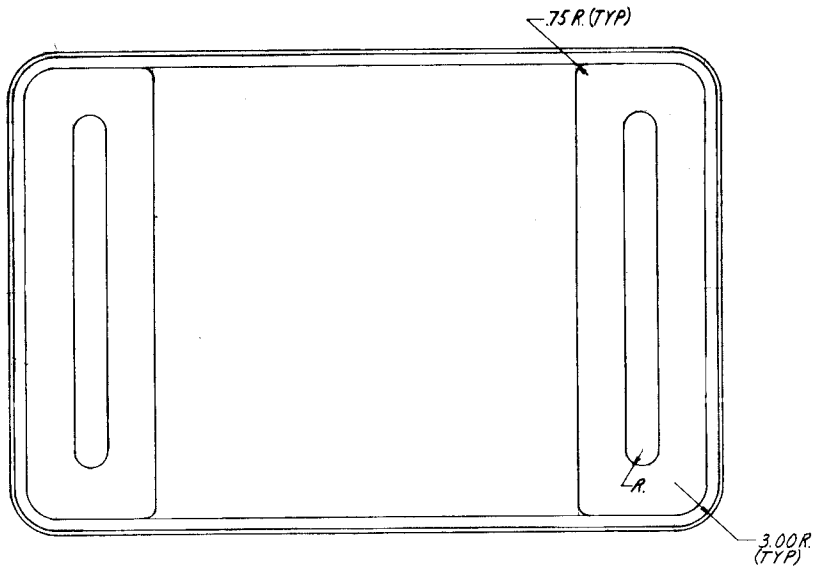

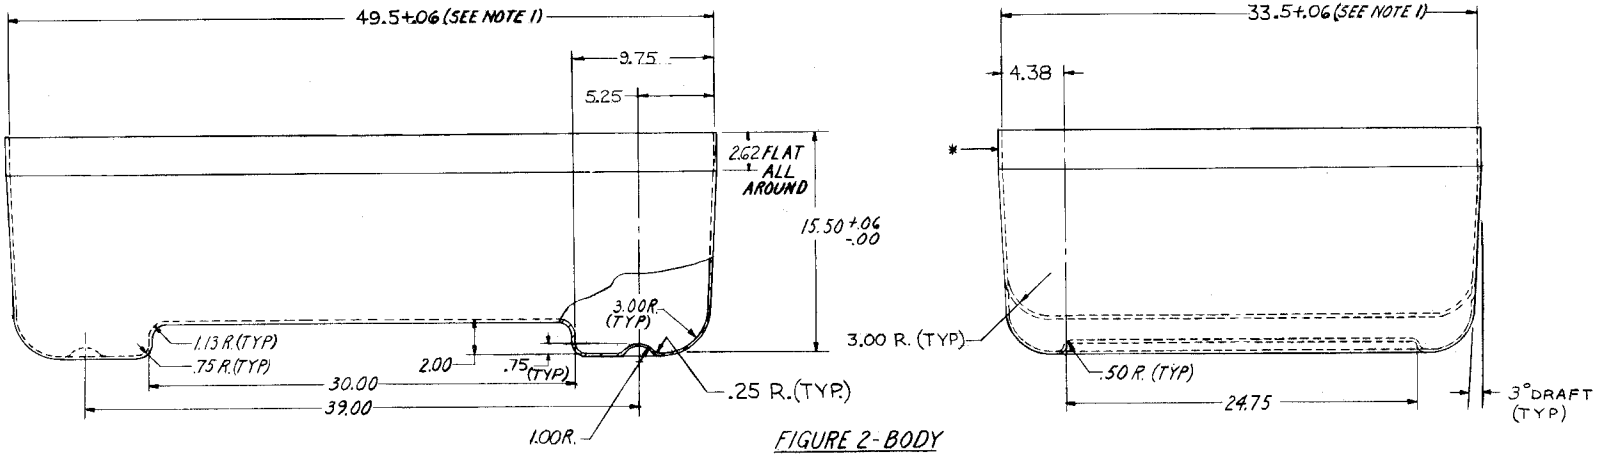
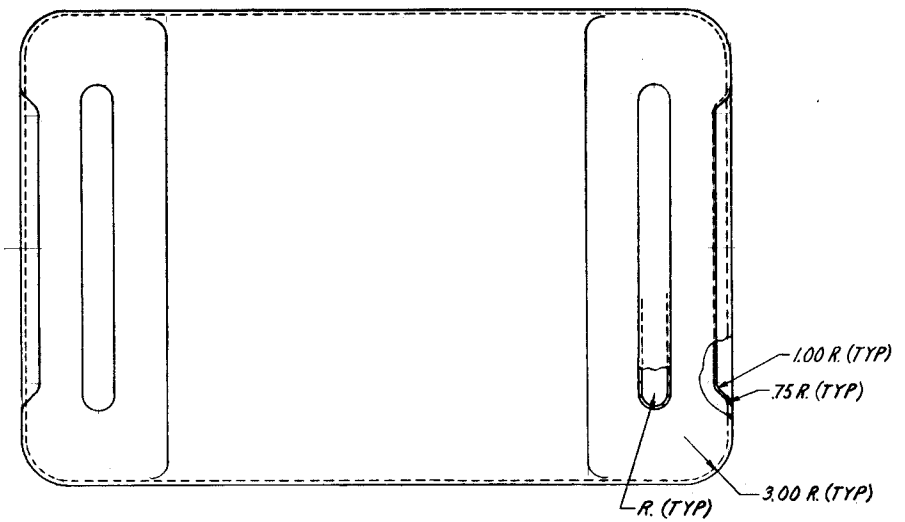



FIGURE 2-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4.
2. MATERIAL SHALL BE AS SPECIFIED IN PARAGRAPH 3.2
COLOR-OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE) SMOOTH (INTERIOR)
* FORMED THICKNESS MEASURED AT TOP PORTION .160 +.020 -.000
3. TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS .X = ±.06, .XX ± .03
ANGLES ±1°

SUGGESTED MATERIAL SOURCE
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA-1492



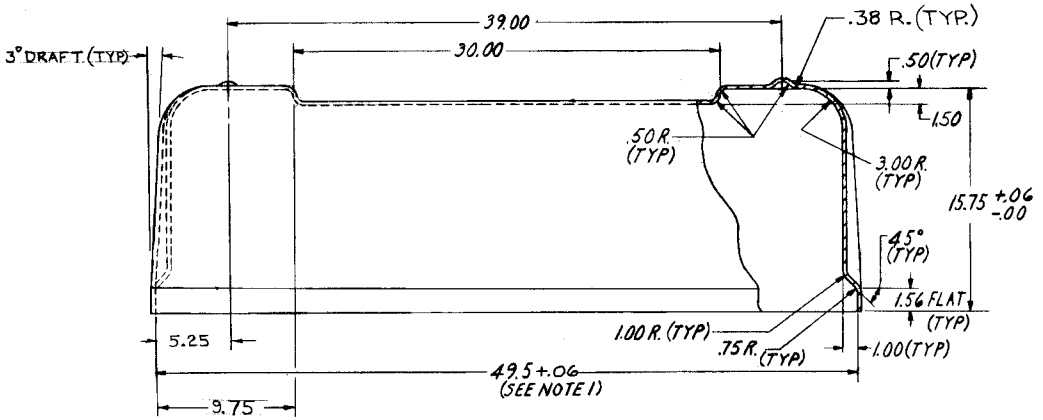

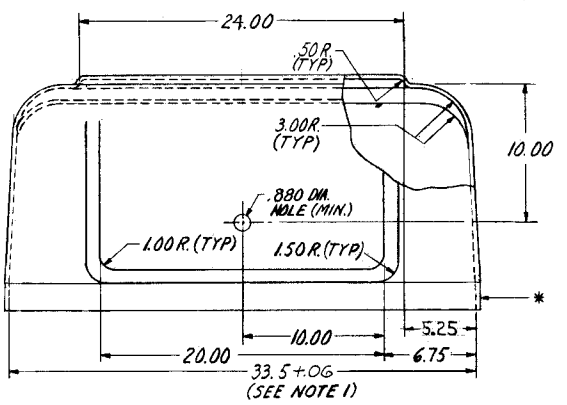


FIGURE 3-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.


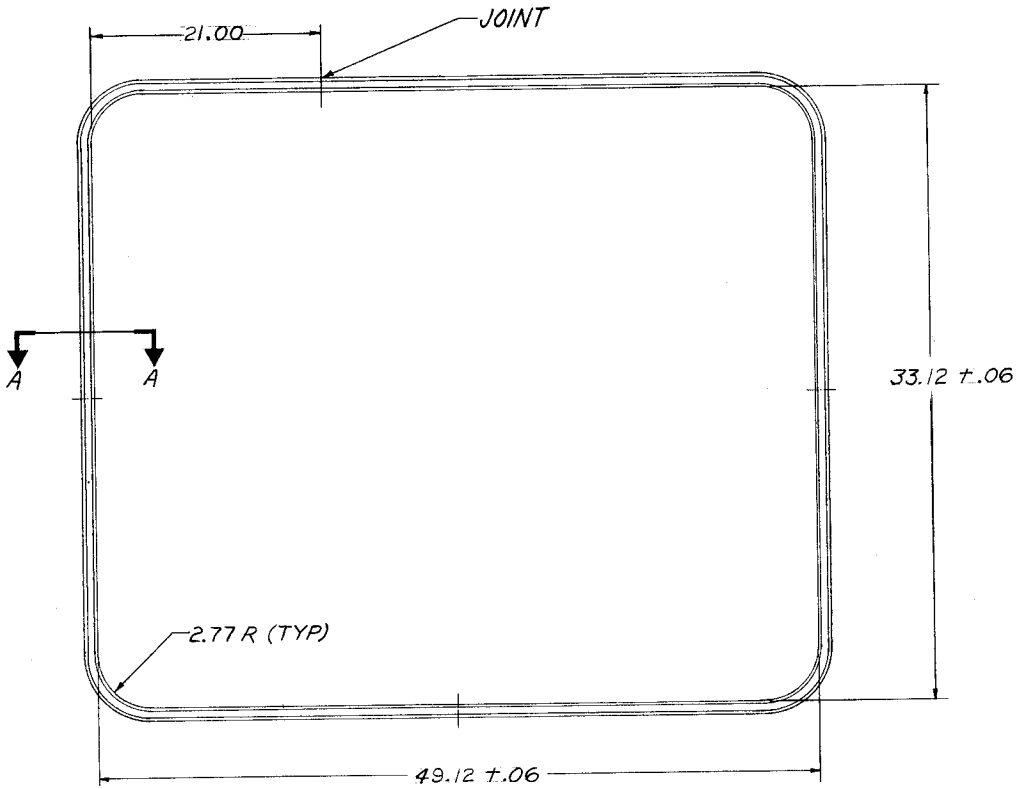



FIG. 4- EXTRUSION ASSEMBLIES

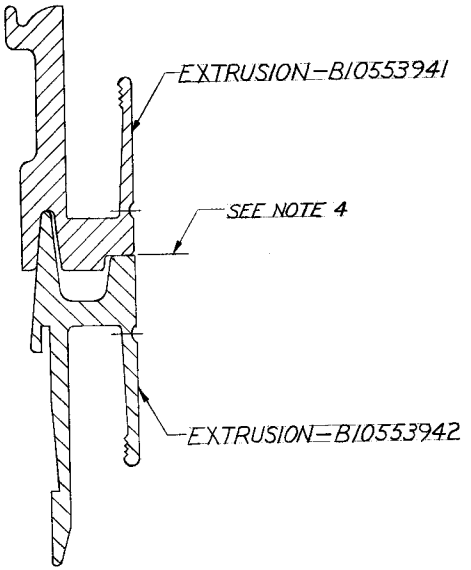

PARTIAL SECTION A-A
(TYPICAL)

NOTES:
1. COMPLETED EXTRUSIONS SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN TYPICAL SECTION.
2. MUST MATCH SHELLS FIGURE 2 AND FIGURE 3.
3. EXTRUSIONS SHALL BE FORMED, WELDED, AND FINISHED IN ACCORDANCE WITH PARA. 3.3.2 AND 3.3.2.1
4. SURFACE SHOWN SHALL BE FLAT WITHIN .020 INCH T.I.R. IN ANY 6 INCHES OF LENGTH AND .030 INCH T.I.R. OVER ENTIRE LENGTH OF ANY SIDE OR END.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

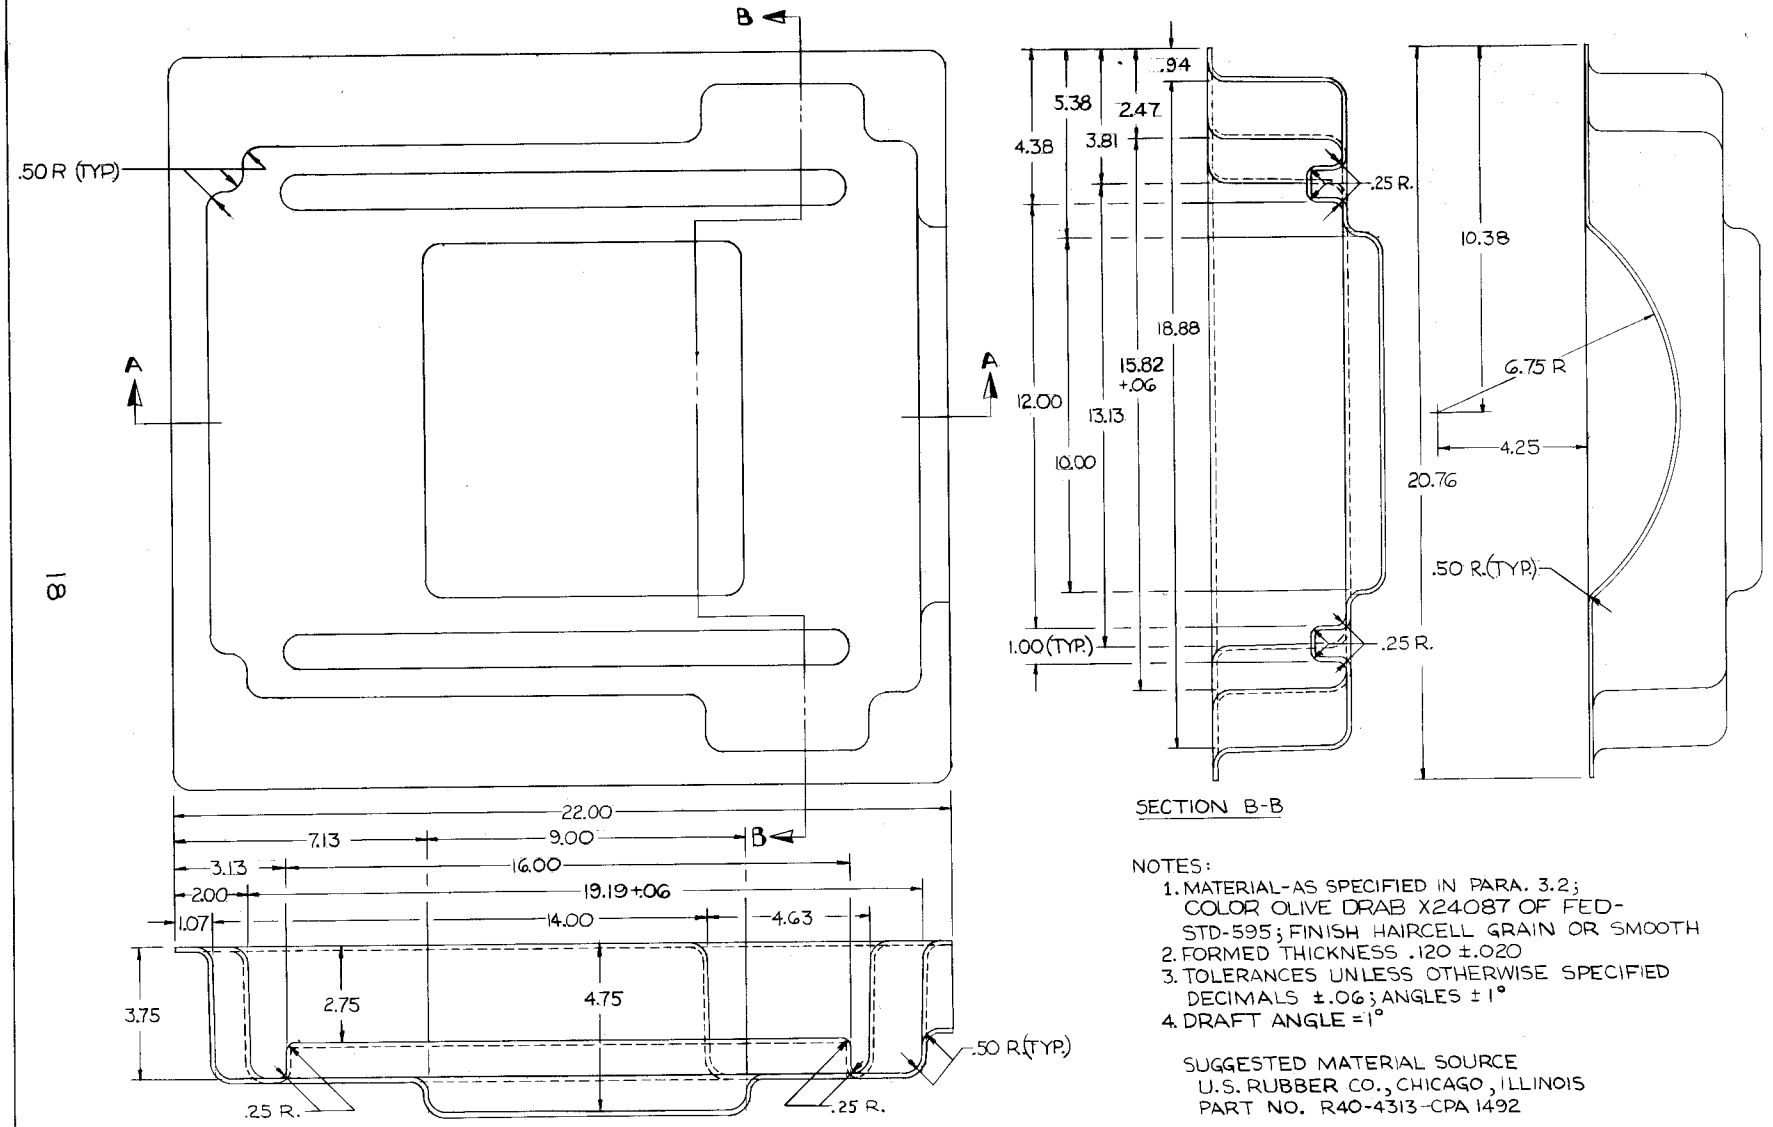

SECTION A-A


FIG. 5 CRADLE

SECTION B-B

NOTES:
1. MATERIAL-AS SPECIFIED IN PARA. 3.2; COLOR OLIVE DRAB X24087 OF FED-STD-595; FINISH HAIRCELL GRAIN OR SMOOTH
2. FORMED THICKNESS .120 ±.020
3. TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMALS ±.06; ANGLES ± 1°
4. DRAFT ANGLE = 1°

SUGGESTED MATERIAL SOURCE
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA 1492

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

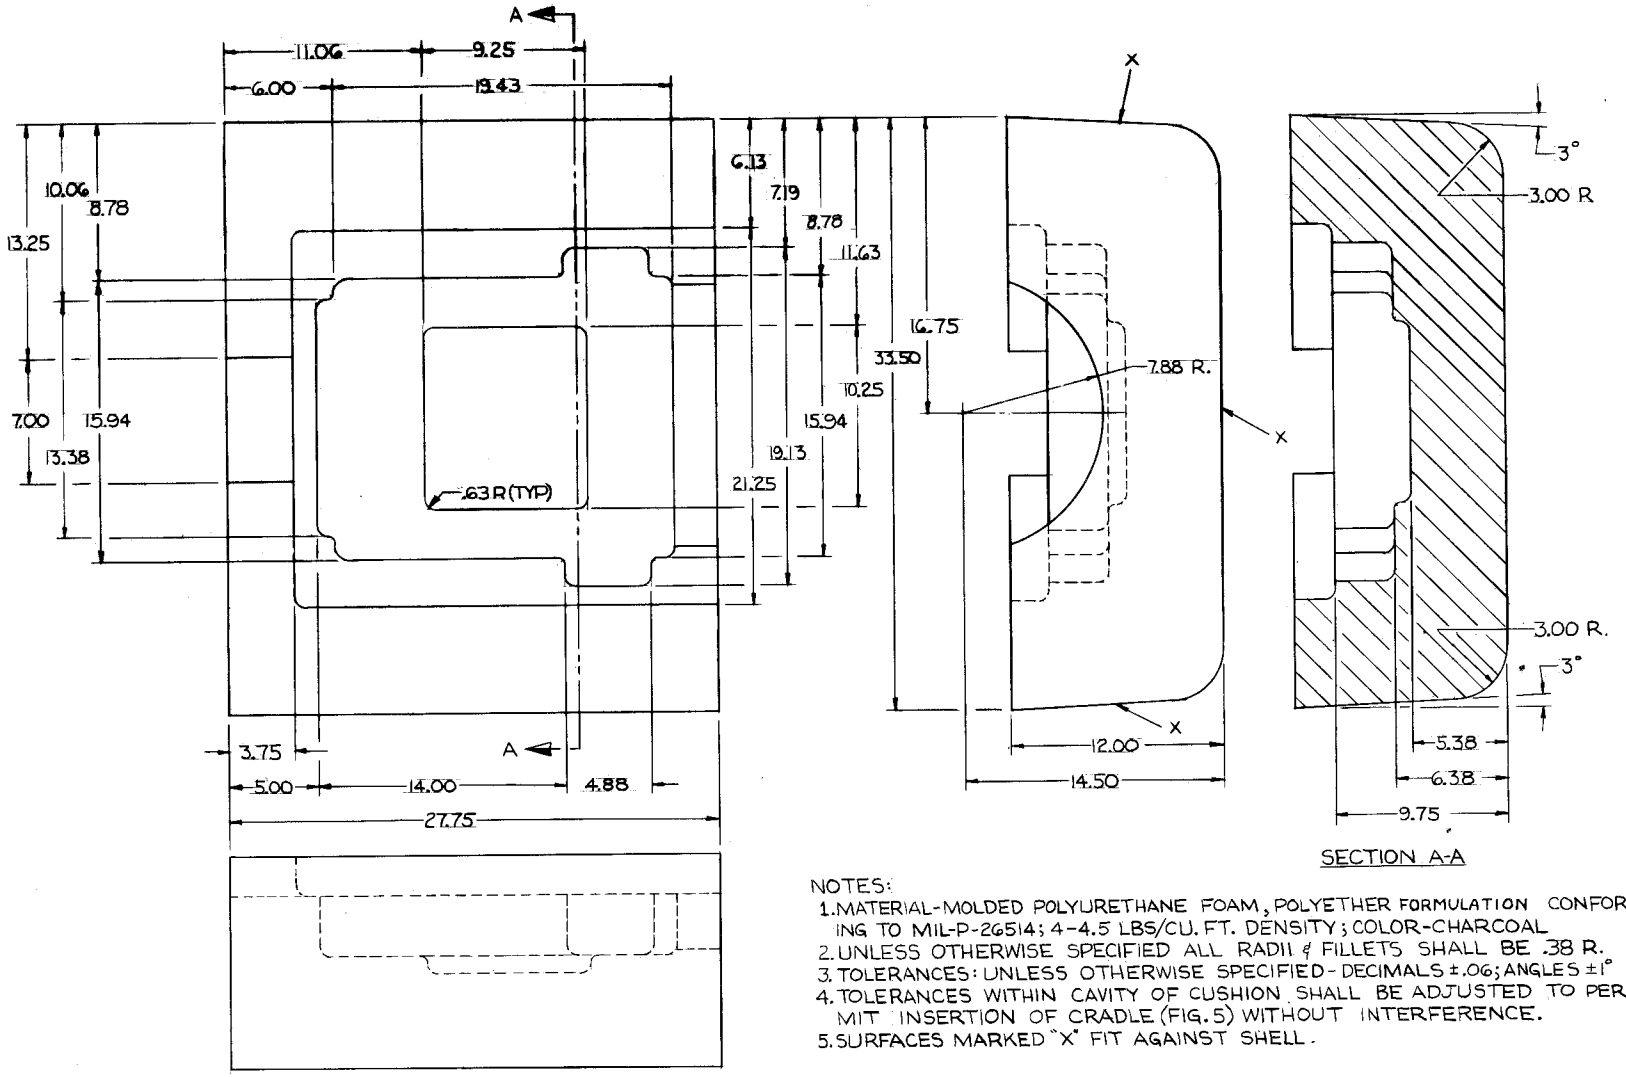

SECTION A-A

NOTES:
1. MATERIAL-MOLDED POLYURETHANE FOAM, POLYETHER FORMULATION CONFORMING TO MIL-P-26514; 4-4.5 LBS/CU. FT. DENSITY; COLOR-CHARCOAL
2. UNLESS OTHERWISE SPECIFIED ALL RADII & FILLETS SHALL BE .38 R.
3. TOLERANCES: UNLESS OTHERWISE SPECIFIED - DECIMALS ±.06; ANGLES ±1°
4. TOLERANCES WITHIN CAVITY OF CUSHION SHALL BE ADJUSTED TO PERMIT INSERTION OF CRADLE (FIG. 5) WITHOUT INTERFERENCE.
5. SURFACES MARKED "X" FIT AGAINST SHELL.

FIG. 6 - CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:20Z
Check the source to verify that this is the current version before use.