MIL-R-60040C (PA)
1 April 1975
Superseding
MIL-R-60040B (MU)
18 August 1967

MILITARY SPECIFICATION

RACK, FLARE CY2617/ALA-17

*This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1. This specification covers the Rack, Flare CY2617/ALA-l7 used for Flare Cartridge MX3529/ALA-17 and Flare Set AN/ALA-17.

*2. APPLICABLE DOCUMENTS

2.1 The *following* documents of the issue In effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-P-31	- Paper, General Specification and Method of Testing
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-B-636	- Box, Fiberboard

MILITARY

*MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)

FSC: 1370

S/S under

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:19Z
Check the source to verify that this is the current version before use.

MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1460 - Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

PRODUCT AND PACKAGE DRAWINGS

8860600 - Carton, packing, Ammunition, for Flare Set
9209575 - Flare Rack CY2617/ALA-17

INSPECTION EQUIPMENT DRAWINGS

*9200050 - Vibration Fixture on Y&Z Axis
*9200445 - Operating Instructions for RITA Flare Rack Assembly Vibration Tests

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as. directed by the Contracting Officer).

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with applicable drawings and specifications.

3.2 Flare rack assembly. - The flare rack assembly shall comply with all requirements specified on drawing (dwg) 92)9575 and with all requirements. specified in applicable specifications.

3.3. Continuity. - All circuits shall have a resistance of 0.5 ohms maximum.

3.4 Insulation resistance. - All circuits shall have 1000 megohms minimum (min) between any two contacts and the contact and ground upon application of 300 plus 50 volts direct current.

3.5 Aircraft vibration. - The rack assembly shall meet the insulation resistance and.continuity requirements after being subjected to aircraft vibration. No wire or parts shall be broken or missing.

2/23

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:19Z
Check the source to verify that this is the current version before use.

3.6 Continuity of strapping. - The resistance between terminals 22, 23, and 39 shall be zero (0).

*3.7 Workmanship.- All parts and assemblies shall be fabricated and finished (or fabricated and loaded) in a through workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips , dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material, All required markings shall be neat and sharply defined. (Required packing shall be dry).

*3.8 Submission of results of contractor-conducted examinations and tests. - The contractor shall forward copies of the results of any of his examinations or tests to the designated address as required by the contract. (see 6.6).

3.9 First article inspection. - This specification contains technical provisions for first article inspection, Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

*4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

*4.2 Classification of inspections. - The following types of inspection shall be conducted on this item.

a. First Article Inspection

b. Quality Conformance Inspection

*4*3 First article inspection.

*4.3.1 Submission. - The contractor shall submit a first article sample (see 6.2b) as designated by the Contracting

2723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

Officer. The first article sample shall consist of 10 complete sets of parts and sub-assemblies (i.e. 10 each of every component and sub-assembly.) The first article sample shall be evaluated in accordance with the Provisions Of 4. 3.2 and 4.3.3.

*4.3.2 Inspections to be performed. - See MIL-A-48076 and paras 4. 4.2.1 thru 4.4.2.26, testing per para 4.4.3, and Table I specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2733

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C (PA)

PARAGRAPH 4.3.2 Cont.	TITLE Rack, flare CY2617/ALA-17		SHEET 1 OF 1		DRAWING NUMBER 9209575
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Parts				
	Examination for defects	10		3.2	4.4.2.1 thru 4.4.2.[illegible]
	Racks (Assemblies)				
	Examination for defects	10		3.2	4.4.2.20 thru 4.4.2.[illegible]
	Tests				
	Continuity	10		3.3	4.5.1
	Insulation resistance	10		3.4	4.5.2
	Continuity of strapping	10		3.5	4.5.1
	Aircraft vibration	1		3.5	4.5.3

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

*4.3.3 Rejection. - See MIL-A-48078.

4.4 Quality conformance inspection.

*4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

*4.4.2 Examination. - (See MIL-A-48078). Unless oth erwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2783

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Plate, base	1 OF 2	9209581
			NEXT HIGHER ASSEMBLY: 9209580

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Diameter of hole for contact assembly		0.40%	3.2	Gage
132.	Diameter of hole for flare		0.40%	3.2	Gage
133.	Location of holes for flare and contact assembly		0.40%	3.2	Gage
134.	Location of holes for rivets for plate lock		0.40%	3.2	Gage
135.	Location of holes for rivets for anchor nut		0.40%	3.2	Gage
136.	Location of hole for key		0.40%	3.2	Gage
137.	Width of slot for center bar		0.40%	3.2	Gage
138.	Depth of slot for center bar		0.40%	3.2	Gage
139.	Total length		0.40%	3.2	Gage
140.	Total width		0.40%	3.2	Gage
141.	Location of hole for roll pin		0.40%	3.2	Gage
Minor					
201.	Diameter of retainer ring		0.65%	3.2	Gage
202.	Diameter of hole for plate lock rivets		0.65%	3.2	Gage
203.	Diameter of hole for anchor nut rivets		0.65%	3.2	Gage
204.	Diameter of hole between retainer ring and contact assembly		0.65%	3.2	Gage

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.1 (Cont.)	Plate, base				9209581
					NEXT HIGHER ASSEMBLY
					9209580
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
205.	Diameter of hole for grounding bolt		0.65%	3.2	Gage
206.	Location of hole for grounding bolt		0.65%	3.2	Gage
207.	Distance from edge to base of hole for flares		0.65%	3.2	Gage
208.	Depth of retainer ring recess		0.65%	3.2	Gage
209.	Depth of retainer ring and contact assembly		0.65%	3.2	Gage
210.	Distance from edge to beginning of contact assembly hole		0.65%	3.2	Gage
211.	Height		0.65%	3.2	Gage
212.	Angle of corners		0.65%	3.2	Gage
213.	Distance from edge to recess for terminal rail		0.65%	3.2	Gage
214.	Width of recess for terminal rail		0.65%	3.2	Gage
215.	Depth of recess for terminal rail		0.65%	3.2	Gage
216.	Thickness at recess for terminal rail		0.65%	3.2	Gage
217.	Finish improper		0.65%	3.2	Visual
218.	Diameter of roll pin hole		0.65%	3.2	Gage
219.	Countersink missing		0.65%	3.2	Visual
220.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

9123

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Plate, lock		9209582
			NEXT HIGHER ASSEMBLY 9209580

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Diameter of hole for flare		0.40%	3.2	Gage
132.	Location of holes for rivets		0.40%	3.2	Gage
133.	Total length		0.40%	3.2	Gage
134.	Total width		0.40%	3.2	Gage
135.	Location of hole for flare		0.40%	3.2	Gage
Minor					
201.	Diameter of rivet hole		0.65%	3.2	Gage
202.	Angle of corners		0.65%	3.2	Gage
203.	Width of slot for terminal rail		0.65%	3.2	Gage
204.	Depth of slot for terminal rail		0.65%	3.2	Gage
205.	Location of slot for terminal rail		0.65%	3.2	Gage
206.	Thickness		0.65%	3.2	Gage
207.	Countersink missing		0.65%	3.2	Visual
208.	Finish improper		0.65%	3.2	Visual
209.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2133

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Plate assembly	1 OF 1	9209580
			NEXT HIGHER ASSEMBLY: 9209576

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A					
101.	Key missing, improperly positioned or loose		100%	3.2	Visual/Manual
Minor					
201.	Any rivet missing or improperly placed		0.65%	3.2	Visual
202.	Any anchor nut missing or improperly placed		0.65%	3.2	Visual
203.	Roll pin missing or improperly placed		0.65%	3.2	Visual
204.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19:1
Check the source to verify that this is the current version before use.

2123

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Panel	1 OF 1	9209578
			NEXT HIGHER ASSEMBLY: 9209576

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Length		0.40%	3.2	Gage
132.	Width		0.40%	3.2	Gage
Minor					
201.	Diameter of rivet hole		0.65%	3.2	Gage
202.	Location of rivet hole		0.65%	3.2	Gage
203.	Finish improper		0.65%	3.2	Gage
204.	Height		0.65%	3.2	Gage
205.	Radius of corner		0.65%	3.2	Gage
206.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

11

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 10:41 EDT
Check the source to verify that this is the current version before use.

2753

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Rail	1 OF 1	9209579
			NEXT HIGHER ASSEMBLY: 9209576

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
121.	Pitch diameter of threads		0.40%	3.2	Gage
132.	Minor diameter of threads		0.40%	3.2	Gage
133.	Width of body		0.40%	3.2	Gage
134.	Width of recess of body		0.40%	3.2	Gage
135.	Depth of recess of body		0.40%	3.2	Gage
136.	Location of bolt hole		0.40%	3.2	Gage
Minor					
201.	Total length		0.65%	3.2	Gage
202.	Total width		0.65%	3.2	Gage
203.	Flange thickness		0.65%	3.2	Gage
204.	Chamfer angle and size		0.65%	3.2	Gage
205.	Total depth		0.65%	3.2	Gage
206.	Radius of recess		0.65%	3.2	Gage
207.	Diameter of large recess for bolt		0.65%	3.2	Gage
208.	Finish improper		0.65%	3.2	Visual
209.	Depth of large recess for bolt		0.65%	3.2	Gage
210.	Depth of small recess for bolt		0.65%	3.2	Gage
211.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2123

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Rail, terminal		9209577
			NEXT HIGHER ASSEMBLY 9209576

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Pitch diameter of threads		0.40%	3.2	Gage
132.	Minor diameter of threads		0.40%	3.2	Gage
133.	Width of recess of body		0.40%	3.2	Gage
134.	Width of body		0.40%	3.2	Gage
135.	Depth of recess of body		0.40%	3.2	Gage
136.	Location of bolt hole		0.40%	3.2	Gage
137.	Location of screw hole		0.40%	3.2	Gage
Minor					
201.	Total length		0.65%	3.2	Gage
202.	Total width		0.65%	3.2	Gage
203.	Flange thickness		0.65%	3.2	Gage
204.	Chamfer angle and size		0.65%	3.2	Gage
205.	Total depth		0.65%	3.2	Gage
206.	Radius of recess		0.65%	3.2	Gage
207.	Diameter of large recess for bolt		0.65%	3.2	Gage
208.	Depth of large recess for bolt		0.65%	3.2	Gage
209.	Depth of small recess for bolt		0.65%	3.2	Gage
210.	Length of flange		0.65%	3.2	Gage
211.	Finish improper		0.65%	3.2	Visual
212.	Diameter of screw hole		0.65%	3.2	Gage
213.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2022-10-20T04:16Z
Check the source to verify that this is the current version before use.

2743

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Case assembly		9209576
			NEXT HIGHER ASSEMBLY 9209575

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Any rivet missing or positioned improperly		0.65%	3.2	Visual
202.	Countersink missing		0.65%	3.2	Visual
203.	Depth of cover recess		0.65%	3.2	Gage
204.	Position of side plate		0.65%	3.2	Gage
205.	Side plate missing or insecure		0.65%	3.2	Visual/Manual
206.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:19:2
Check the source to verify that this is the current version before use.

2773.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH 4.4.2.8	TITLE Cover		SHEET 1 OF 1		DRAWING NUMBER 9209653
					NEXT HIGHER ASSEMBLY 9209575
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Total length		0.40%	3.2	Gage
132.	Total width		0.40%	3.2	Gage
133.	Location of screw hole for cover		0.40%	3.2	Gage
134.	Location of hole for connector		0.40%	3.2	Gage
135.	Location of hole to hold connector		0.40%	3.2	Gage
136.	Profile of connector hole		0.40%	3.2	Gage
Minor					
201.	Thickness		0.65%	3.2	Gage
202.	Finish improper		0.65%	3.2	Visual
203.	Radius of corner improper		0.65%	3.2	Gage
204.	Countersink missing		0.65%	3.2	Visual
205.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2123

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.9	Center bar		9212117
			NEXT HIGHER ASSEMBLY
			9209645

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Length to "forked" end		0.40%	3.2	Gage
Minor					
201.	Length of forks		0.65%	3.2	Gage
202.	Width		0.65%	3.2	Gage
203.	Thickness		0.65%	3.2	Gage
204.	Finish improper		0.65%	3.2	Visual
205.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19:27
Check the source to verify that this is the current version before use.

2733

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9209645
4.4.2.10	Center bar and pin assembly				NEXT HIGHER ASSEMBLY 9209575
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Pin missing, loose, or positioned improperly		0.40%	3.2	Visual/Manual
Minor					
201.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2143

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Leaf contact	1 OF 1	9209587
			NEXT HIGHER ASSEMBLY 9209586

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Distance between rivet holes		0.40%	3.2	Gage
132.	Distance between rivet hole and wire hole		0.40%	3.2	Gage
133.	Diameter of round rivet hole		0.40%	3.2	Gage
134.	Diameter of pointed rivet hole		0.40%	3.2	Gage
Minor					
201.	Radius of contact		0.65%	3.2	Gage
202.	Wire hole missing		0.65%	3.2	Visual
203.	Distance from rivet holes to wire contact		0.65%	3.2	Gage
204.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:19Z
Check the source to verify that this is the current version before use.

2133

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.12	Disc				9209585
					NEXT HIGHER ASSEMBLY 9209584
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Location of rivet hole		0.40%	3.2	Gage
132.	Location of contact holes		0.40%	3.2	Gage
133.	Roll pin hole improperly positioned		0.40%	3.2	Visual
Minor					
201.	Thickness		0.65%	3.2	Gage
202.	Diameter		0.65%	3.2	Gage
203.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2733

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Contact and disc assembly	1 OF 1	9209584
			NEXT HIGHER ASSEMBLY: 9209575

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Color of rivet seals		0.65%	3.2	Visual
202.	Any component missing or improper		0.65%	3.2	Visual
203.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:18Z
Check the source to verify that this is the current version before use.

1993

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Key	1 OF 1	9209654
			NEXT HIGHER ASSEMBLY 9209580

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Width		0.65%	3.2	Gage
202.	Thickness		0.65%	3.2	Gage
203.	Location of hole		0.65%	3.2	Gage
204.	Diameter of hole		0.65%	3.2	Gage
205.	Countersink missing		0.65%	3.2	Visual
206.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 04:47:52
Check the source to verify that this is the current version before use.

9743

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER 9209648
4.4.2.15	Lock nut and bushing assembly		NEXT HIGHER ASSEMBLY 9209575

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Minor diameter of thread		100%	3.2	Gage
132.	Pitch diameter of threads		0.40%	3.2	Gage
133.	Total length		0.40%	3.2	Gage
Minor					
201.	Outside diameter		0.65%	3.2	Gage
202.	Outside diameter of unthreaded end		0.65%	3.2	Gage
203.	Inside diameter of unthreaded end		0.65%	3.2	Gage
204.	Distance from end to large diameter		0.65%	3.2	Gage
205.	Distance from thread		0.65%	3.2	Gage
206.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2723

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH 4.4.2.16	TITLE Screw, cap necked		SHEET 1 OF 1		DRAWING NUMBER 9209651
					NEXT HIGHER ASSEMBLY 9209575
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Pitch diameter of thread, min		0.40%	3.2	Gage
132.	Major diameter of thread		0.40%	3.2	Gage
133.	Distance from head to thread end		0.40%	3.2	Gage
134.	Radii missing		0.40%	3.2	Visual
Minor					
201.	Diameter		0.65%	3.2	Gage
202.	Diameter of shoulder		0.65%	3.2	Gage
203.	Diameter of head		0.65%	3.2	Gage
204.	Length of head		0.65%	3.2	Gage
205.	Wrench recess		0.65%	3.2	Gage
206.	Distance from head to thread		0.65%	3.2	Gage
207.	Finish improper		0.65%	3.2	Visual
208.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2733

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.17	Side plate		9209652
			NEXT HIGHER ASSEMBLY
			9209576

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Total length		0.65%	3.2	Gage
202.	Width		0.65%	3.2	Gage
203.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.18	Ring, shorting		9209656
			NEXT HIGHER ASSEMBLY 9209655

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Outside diameter		0.40%	3.2	Gage
132.	Inside diameter		0.40%	3.2	Gage
133.	Thickness		0.40%	3.2	Gage
134.	Chamfer missing		0.40%	3.2	Visual
135.	Location of notches		0.40%	3.2	Gage
Minor					
201.	Location of holes		0.65%	3.2	Gage
202.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

4133

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.19	Shorting ring assembly		9209655
			NEXT HIGHER ASSEMBLY 9209575

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Assembly damaged to the extent that functioning is impaired		0.40%	3.2	Visual
132.	Cord improperly assembled		0.40%	3.2	Visual
Minor					
201.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH 4.4.2.20	TITLE Electrical installation		SHEET 1 OF 1		DRAWING NUMBER 9209575
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Shrink sleeve missing or improperly positioned		0.40%	3.2	Visual
132.	Connections improperly soldered (see 2.1) (check wires before potting and adding shrink sleeves)		0.40%	3.2	Visual/Manual
133.	Terminal lug missing or improperly positioned		0.40%	3.2	Visual/Manual
134.	Cable to the left of connector		0.40%	3.2	Visual
135.	Tie wraps improperly located		0.40%	3.2	Visual
Minor					
201.	Wire improper		0.65%	3.2	Visual
202.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2743

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.21	Rack assembly, after adding potting composition	1 OF 1	9209575
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major B					
131.	Potting composition where not required		0.40%	3.2	Visual
132.	Freeness of movement of connector after potting composition has been added		0.40%	3.2	Manual
133.	All connector tab wires not covered with potting composition		0.40%	3.2	Visual
134.	Bare wire showing		0.40%	3.2	Visual
135.	Broken straps		0.40%	3.2	Visual
136.	Cut or scoring		0.40%	3.2	Visual
137.	Crack in potting composition		0.40%	3.2	Visual
Minor					
201.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

4743

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Rack, flare CY2617/ALA-17, assembly				9209575
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A					
101.	Continuity		100% (note a)	3.3	4.5.1
102.	Insulation resistance		100% (note a)	3.4	4.5.2
103.	Aircraft vibration	2		3.5	4.5.3
104.	Continuity of strapping		100% (note a)	3.6	4.5.5
Major B					
131.	Any component missing, insecure or improperly positioned		0.40%	3.2	Visual
132.	Lubricant missing		0.40%	3.2	Visual
133.	Overall length, width, and height		0.40%	3.2	Gage
Minor					
201.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:
Note a - Any defective rack shall be removed from the lot.

DSCC-DA FORM 2567, FEB 74

29

Source: https://assist.dla.mil -- Downloaded: 20261026104:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23	Carton, prior to inserting flare rack	1 OF 1	8860600
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Any packing material missing or improperly positioned		0.65%	3.2	Visual
202.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

SERPA QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T04:19Z
Check the source to verify that this is the current version before use.

2193

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.24	Sealed carton, after inserting flare rack				8860600
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Contents loose		0.65%	3.2	Manual
202.	Sealing strip missing, torn or improperly positioned		0.65%	3.2	Visual
203.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

DSCPA 04 FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

2773

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	Box prior to sealing	1 OF 1	Note A
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Any filler material missing		0.65%	3.2	Visual
202.	Rack missing		0.65%	3.2	Visual
203.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:
A: See Specification PPP-B-636 and Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-60040C(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Box, sealed				Note A
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201.	Contents loose in box		0.65%	3.2	Visual/Manual
202.	Box damaged to extent that contents are exposed or likely to become exposed		0.65%	3.2	Visual
203.	Marking misleading or unidentifiable		0.65%	3.2	Visual
204.	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

A: See Specification PPP-B-636 and Section 5.

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 04:19Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

4.4.3.1 Moisture content (all packing material) Major A defect (see dwg 8860600). - The contractor shall provide adequate controls to assure compliance with the requirements. For verification the contractor shall select, as a minimum, one sample of each material as representative of each months production of flare racks. Composite samples shall not be used. If the moisture content of a sample exceeds the allowable limit, that quantity or sub-lot of material represented by the sample shall be rejected. If material from a sub-lot with excessive moisture has been used in loading, all assemblies containing the non-conforming material shall be rejected.. Test shall be performed as specified 4.5.4, using equipment in accordance with 4.4.4.

*4.4.4 Inspection equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the 'Paragraph Reference/ Inspection Method' column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and section 6.3 herein.

4.5 Test methods and procedures.

4.5.1 Continuity. - A test fixture shall be assembled to the connector and to the contact for each circuit. This is a non-destructive test.

4.5.2 Insulation resistance. - A test fixture shall be assembled to the connector and to the circuit tested.

4.5.3 Aircraft vibration.

*4.5.3.1 Procedure. - The flare rack CY2617/ALA-17 with approximately 32 pounds of inert cartridges (see 6.5) shall be fastened in an ejector set, flare AN/ALE-20 with a torque of 140 inch pounds, plus 10 inch pounds for all vibration tests. Where feasible, the flare rack with ejector set assembly shall be tested with the airplane mounting brackets. Otherwise a rigid test installation shall be made. Under no circumstances shall the freedom-of movement of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

flare cartridge during vibration be impaired. In all cases, the flare rack with ejector set assembly shall be attached either directly or through the airplane mounting brackets, if feasible, to a test fixture of maximum rigidity. The test fixture should be designed to eliminate or minimize fixture resonances in the test frequency range. The test configuration shall be such that rotational motion of the test fixture is not induced due to any unsymmetrical weight or stiffness distribution of the equipment item or mounting brackets.

Measurements of vibratory accelerations or displacements shall be made adjacent to the mounting points or the equipment item. All frequency measurements shall be accurate within plus or minus 5 percent. All displacement or acceleration measurements shall be accurate within plus or minus 10 percent. The motion of the vibrator table shall be simple harmonic motion with not more than 20 percent distortion. The monitoring control signal from the accelerometers shall be unfiltered.

The rack with ejector set assembly shall vibrate with' essentially simple harmonic motion in each of three mutually perpendicular directions to explore for resonant frequencies

Frequency scans shall be conducted very slowly and carefully. The recommended speed shall be half (1/2) the stated cyclical rate from five (5) Hz to 1500 (Hz) (eg if the time spread to cycle is fifteen (15) minutes it shall be accomplished in 30 minutes, or a stated speed). This time shall be deducted from the specified test frequency scan.

The test report must contain complete description of all resonances, including the resonant frequencies, parts in resonance, and the effects on the functioning of the test item. Scans shall be conducted at room temperature, and also at -60 degrees F. and plus 150 degrees F.

After completion of the frequency scan, resonance endurance tests shall be conducted at all resonant frequencies of the components, with the applied force adjusted as necessary to obtain the applicable fixture displacements or accelerations specified by the test curve. The vibrator and power supply must be capable of producing the prescribed fixture motions at all frequencies. Endurance tests shall not be conducted at any resonant frequency of the fixture. Endurance test shall be performed in fifteen (15) minute intervals. The delay interval shall be a minimum of ten (10) minutes for safety considerations.

2733

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

If a change in resonant frequency occurs during endurance testing at resonance, the frequency of-vibration shall be adjusted to follow the resonance. However, if large or abrupt resonant frequency shifts occur, the item shall be examined for component failures or excessive wear, etc.

Resonance endurance tests shall be conducted for one million hertz each or 8 hours, whichever occurs first, for the total of all resonances. Two-thirds of each endurance test shall be conducted at room temperature.- One-sixth of each test shall be conducted at -60 degrees F, and one-sixth of each test shall be conducted at plus 150 degrees F. If the same resonance is excited by vibration applied in more than one direction, the endurance test for that resonance shall be accomplished with vibration applied to the direction which produces the greatest response, If no resonances are found, the item shall be vibrated at 100 Hertz (Hz) and the corresponding amplitude of the applicable test curve for one million Hertz in each of three mutually perpendicular directions (see figure 1).

The rack with ejector set assembly shall be subjected to the following cycling tests at room temperature in addition to the frequency scan and resonance endurance tests. The equipment as mounted for the resonance tests shall be vibrated at the displacements and accelerations defined by the attached test curve with the frequency in a cycle continuously varied between the limits of the applicable curve of approximately 15 minutes. The rate of change of frequency shall be proportional to the frequency. The total test time shall be 1-1/2 hours. This test shall be repeated with vibration along each of three mutually perpendicular axes. The cycling test may be broken into convenient ranges, provided the cycling rates and test times for each range are not change. Testing shall be performed in accordance with 9200445 and 9200050.

4.5.4 Moisture content. (packing material). - The moisture content shall be determined in accordance with Method 240 of Specification UU-P-31 except that a 50 gram sample shall be used.

4.5 .5 Continuity of strapping. - The test shall be as specified in 4.501.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

5* PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

*5.1.1 Level C. - Each rack only shall be packaged in a fiberboard carton with pad and fillers as described on dwg 8860600. The barrier bag shall be omitted. The carton shall be closed by application of 2 inch wide tape over the full length of the center top seam of the carton with a minimum 2 inch extension onto the end panels of the carton. The tape snail conform to PPP-T-45 for Type III, Class 2, Grade B tape.

5.2 Packing.

*5.2.1 Level C. - Five (5) unit cartons shall be packed in a fiberboard box conforming to PPP-B-636, for a Type CF, Class Domestic, Variety SW, Grade 200 minimum box. The box shall be closed by application of 2 inch wide tape over the full length of all top and bottom seams of the carton with a minimum 2 inch extension of tape around all corners of the box and onto the end panels. Tape shall comply with PPP-T-45 requirements for a Type III, Class 2 Grade B tape.

*5.3 Marking. - Individual unit cartons shall not be marked. The exterior fiberboard box shall be marked in accordante with MIL-STD-1169 requirements.

6. NOTES

*6.1 Intended use. - The Rack, Flare, CY2617/ALA-17 is intended for use with Flare Cartridge MX3529/ALA-17 and Flare Set AN\ALA-17.

*6.2 Ordering data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.

b. Provisions for submission of first article samples.

c. provisions of MIL-A-48078.

*6.3 Submission of inspection equipment designs for approval. - (See MIL-A-48078). Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T-T Dover, New Jersey 07801.

2723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

6.4 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M Dover, New Jersey 07801.

6.5 Ejector set flare AN/ALE-20. - The ejector set flare AN/ALE-20 with the inert cartridge will be supplied by the Government.

*6.6 Submission of results of contractor conducted examination-s' and tests. - Unless other-wise specified by the Contracting Officer, the contractor shall forward the requested test data to: Commander, Picatinny ARsenal, ATTN: SARPA-QA-A-M, Dover, New Jersey 07801.

6.7 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of, this document based-on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1370-A-042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

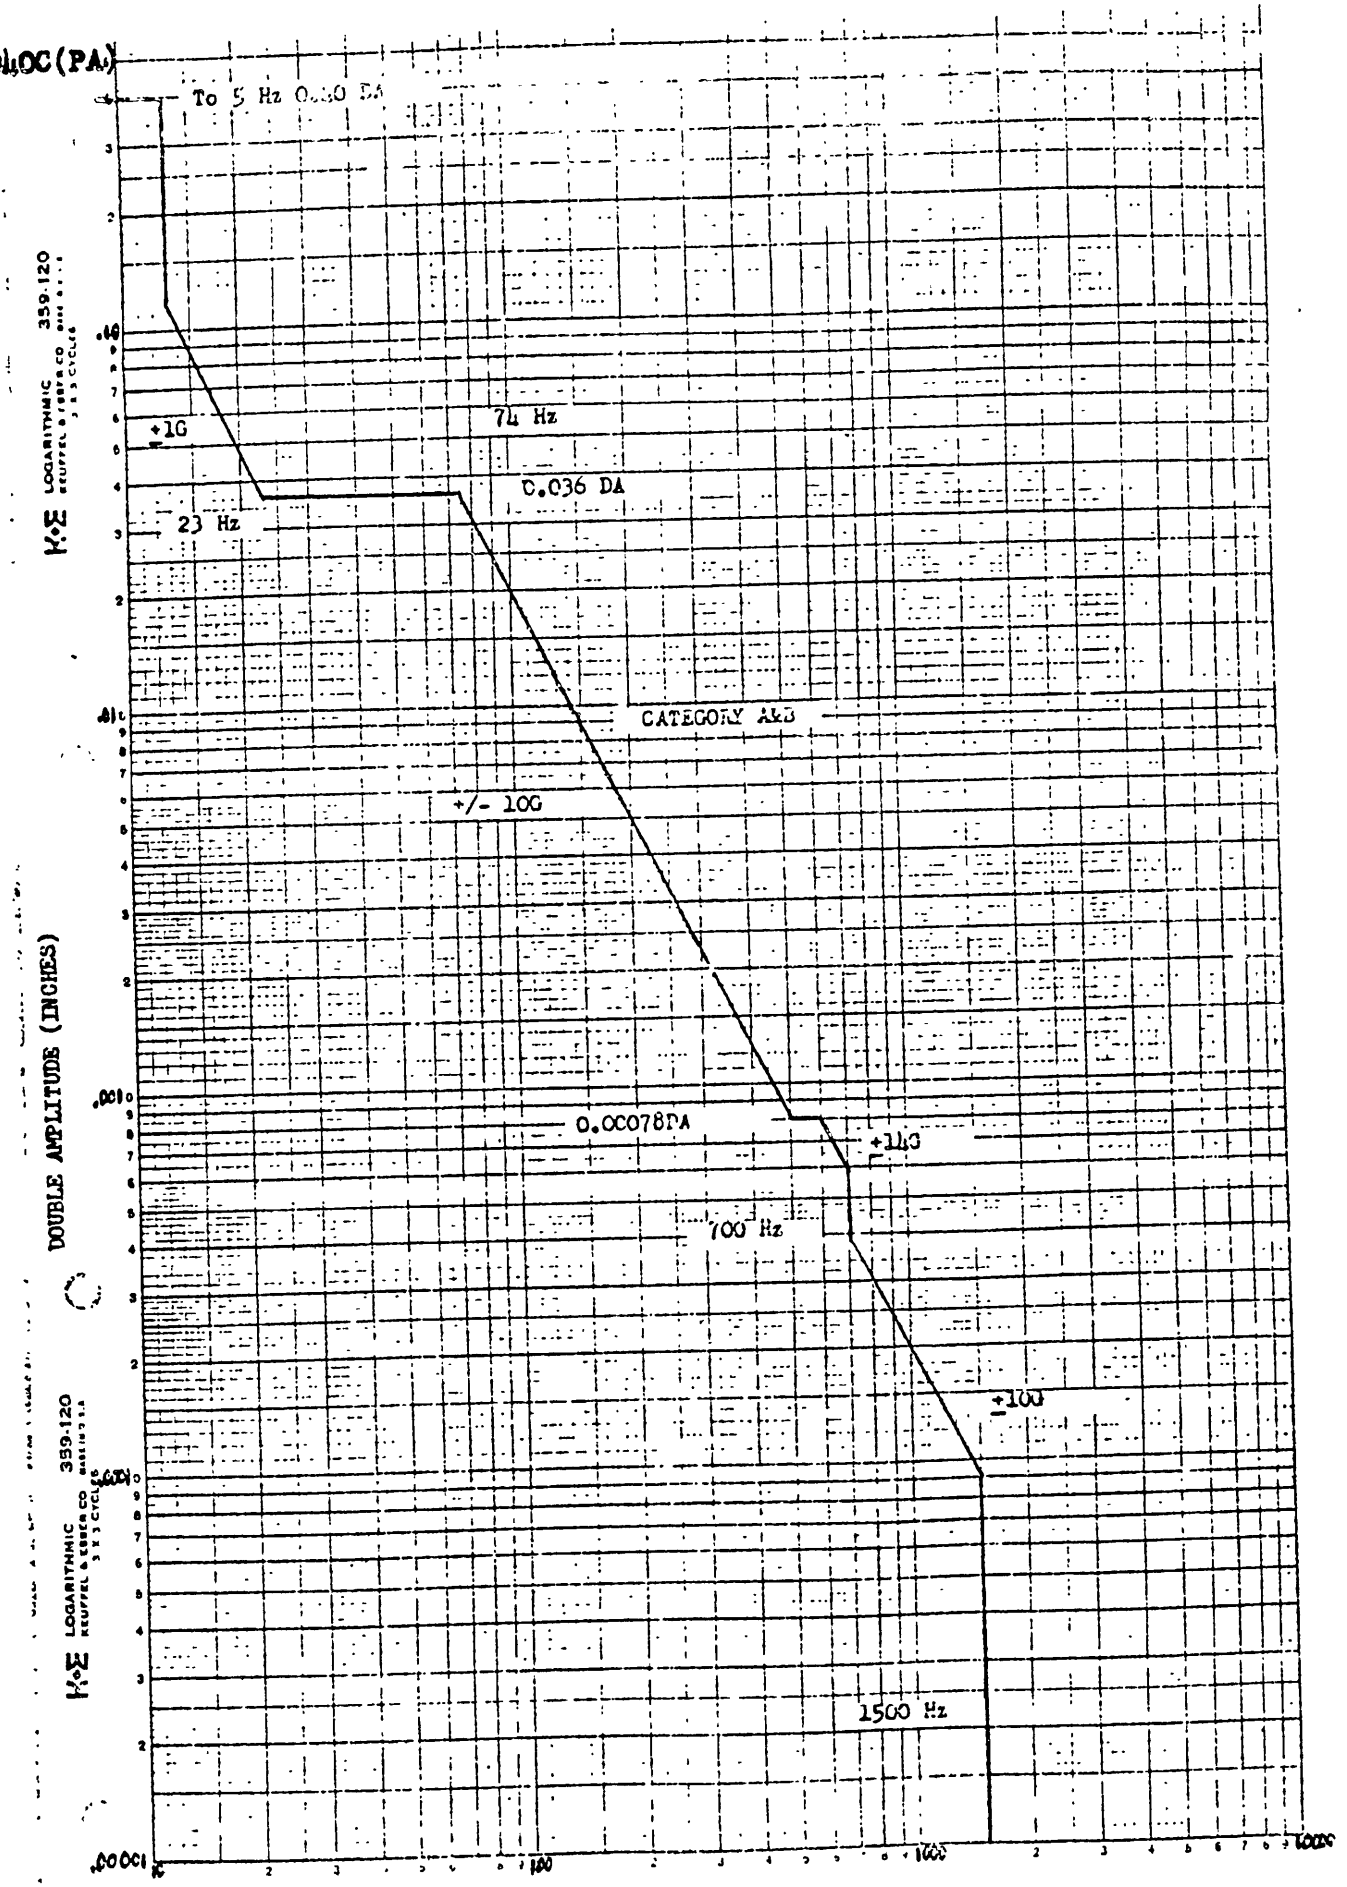


Fig. 1

2733

AIRCRAFT VIBRATION CURVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to improve the quality of [illegible] documents, the user [illegible] this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
Picatinny Arsenal
Attn: SARPA-QA-A
Dover, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:19Z
Check the source to verify that this is the current version before use.