The documentation and process conversion measures necessary to comply with this amendment shall be completed by 25 June, 2001.

INCH-POUND

MIL-PRF-19500/496B
AMENDMENT 1
25 March 2001

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, DUAL, PNP, UNITIZED,
SILICON, TYPES 2N5795 2N5796, AND 2N5796U, JAN, JANTX AND JANTXV

This amendment forms a part of MIL-PRF-19500/496B, dated 15 September 1998, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 6

4.3.1, delete and substitute:

"4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: V_{CB} = 10 - 30 V dc. Power shall be applied to achieve T_J = +135°C minimum and a minimum P_D = 75 percent of P_T maximum rated as defined in 1.3."

4.4.2, Step 1, condition column, delete and substitute:

"Steady-state life: Test condition B, 340 hours, V_{CB} = 10 - 30 V dc. Power shall be applied to achieve T_J = +150°C minimum and a minimum of P_D = 75 percent of maximum rated P_T as defined in 1.3. n = 45 devices, c = 0. "

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:28Z
Check the source to verify that this is the current version before use.

FIGURE 3, delete and substitute:

“

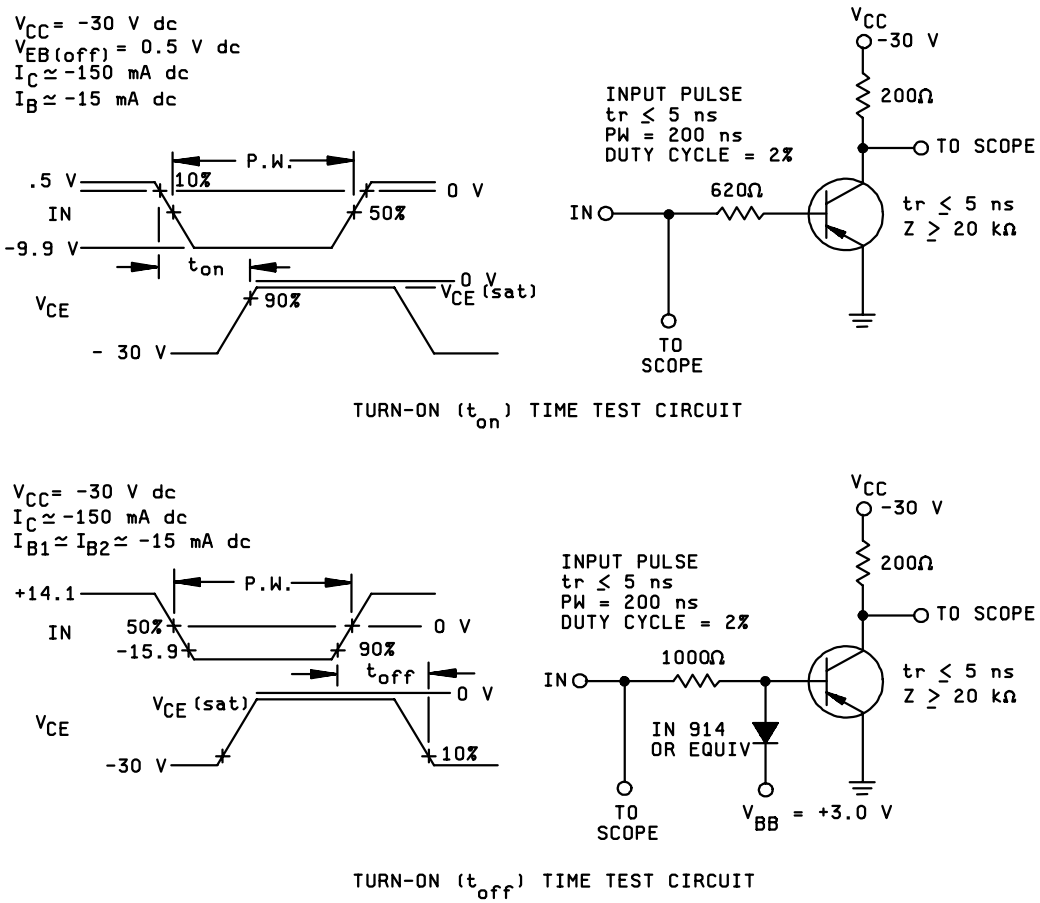

FIGURE 3. Switching time test circuits. ”

Custodians:
Army - CR
Navy - NW
Air Force - 11
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2248)

Review activities:
Army – AR, MI, SM
Navy - AS, CG, MC, OS
Air Force - 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:28Z
Check the source to verify that this is the current version before use.