PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON,
SCHOTTKY BARRIER, FAST RECOVERY,
TYPE 1N6391, JAN, JANTX, JANTXV, JANS, AND JANHC

This amendment forms a part of MIL-PRF-19500/553A, dated 27 June 1997 and is approved for use by all Departments and Agencies of the Department of Defense.

Page 3

Figure 1 Physical dimensions. Delete in its entirety and substitute:

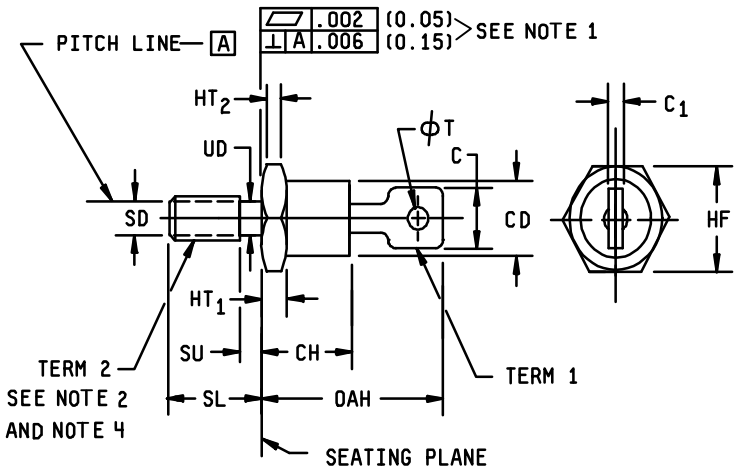

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
C		.250		6.35	6
C_1	.018	.065	0.46	1.65	
CD	.265	.424	6.74	10.76	
HF	.403	.437	10.24	11.10	
HT_1	.075	.175	1.91	4.44	
HT_2	.060		1.53		5
CH	.300	.405	7.62	10.28	
OAH	.600	.800	15.42	20.32	
UD	.163	.189	4.14	4.80	
SD					4
SL	.422	.453	10.72	11.50	
SU		.078		1.98	3
ϕT	.060	.103	1.52	2.62	

NOTES:
1. Dimensions are in inches, metric equivalents are given for general information only.
2. Units must not be damaged by torque of 15 inch-pounds applied to .10-32 UNF-2B nut assembled on thread.
3. Length of incomplete or undercut threads - SU.
4. Maximum pitch diameter of plated threads shall be basic pitch diameter .1697 inch (4.31 mm) reference (FED-STD-H28, Screw-Thread Standards for Federal Services).
5. A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane .403 inch (10.24 mm).
6. The angular orientation and peripheral configuration of terminal 1 is undefined, however, the major surfaces over dimensions C and C_1 shall be flat.
7. Dimension CD can not exceed dimension HF

Figure 1. Physical dimensions (similar to DO-41).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.

Page 4

Figure 3, dimensions table, delete and substitute in its entirety:

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.142	.144	3.60	3.66
B	.155	.157	3.94	3.99
C	.009	.013	.229	.330

Page 7

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500. Subgroup B3, delete and substitute: I_{FSM} = 600 A pk; $t_p \leq 8.3$ ms; six 8.3ms surges; 1 surge/minute maximum; Io = 22.5 A, V_R = Rated (see 1.3), 100°C ≤ T_C ≤ 125°C.

Custodians:
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

Review activities:
Air Force - 13, 19, 99

(Project 5961-2055)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:13Z
Check the source to verify that this is the current version before use.