The documentation and process conversion measures necessary to comply with this amendment shall be completed by 2 July 1998.

INCH POUND

MIL-PRF-19500/595C
AMENDMENT 2
2 July 1998
SUPERSEDING
AMENDMENT 1
26 August 1996

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, REPETITIVE AVALANCHE, FIELD EFFECT,
TRANSISTOR, P-CHANNEL, SILICON,
TYPES 2N7236, 2N7237, 2N7236U, AND 2N7237U
JANTX, JANTXV, JANS, JANHC, AND JANKC

This amendment forms a part of MIL-PRF-19500/595C, dated 26 August 1996, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 9

4.3, screening table, screen 12, JANTX and JANTXV column, after "condition A" add "or".

PAGE 11

* 4.5.2.b., after “3.3 A” add “minimum (2.5 A minimum for surface mount devices).”; 4.5.2.d., after “25 V” add “minimum (20 V minimum for surface mount devices).”

* 4.5.3.b, after “3.3 A” add “minimum (2.5 A minimum for surface mount devices).”; 4.5.3.c, after 100 ms, add “minimum (25 ms minimum for surface mount device.)”; 4.5.2.d., after “25 V” add “minimum (20 V minimum for surface mount devices).”

* The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Pages Replaced
5	5
6	reprinted without change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:51Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 13, 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-2043-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:51Z
Check the source to verify that this is the current version before use.

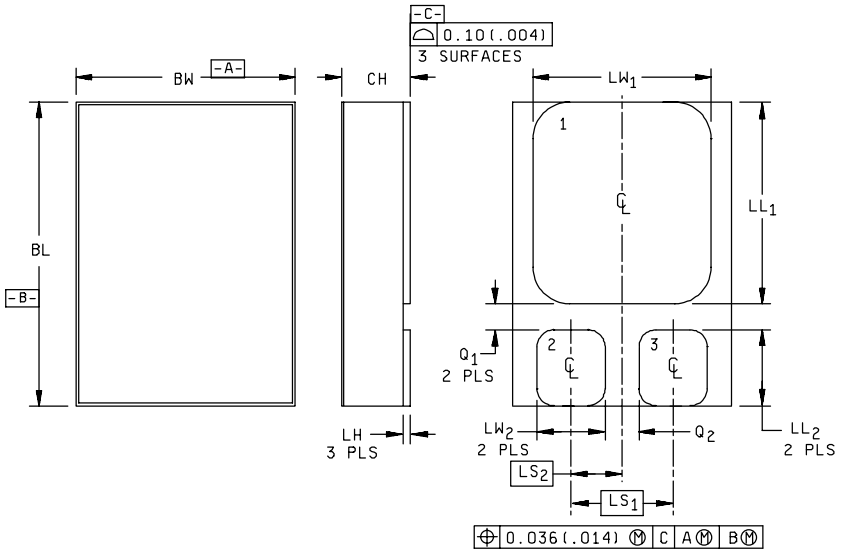

Dimensions				
Symbol	Inches		Millimeters	
	Min	Max	Min	Max
BL	.619	.631	15.73	16.02
BW	.444	.456	11.28	11.58
CH	- - -	.142	- - -	3.60
LH	.010	.020	0.26	0.50
LL_1	.409	.421	10.39	10.69
LL_2	.151	.163	3.84	4.14
LS_1	.210 BSC		5.33 BSC	
LS_2	.105 BSC		2.67 BSC	
LW_1	.369	.381	9.38	9.67
LW_2	.134	.146	3.41	3.70
Q_1	.030	- - -	0.76	- - -
Q_2	.035	- - -	0.89	- - -
Term 1	Drain			
Term 2	Gate			
Term 3	Source			

NOTES:
1. Controlling dimension: Inch.
2. Metric equivalents are given for information only.
3. The lid shall be electrically isolated from the drain, gate and source.
4. Dimensioning and Tolerancing shall be in accordance with ANSI Y14.5M 1982.

FIGURE 3. Dimensions and configuration of surface mount package outline .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:51Z
Check the source to verify that this is the current version before use.

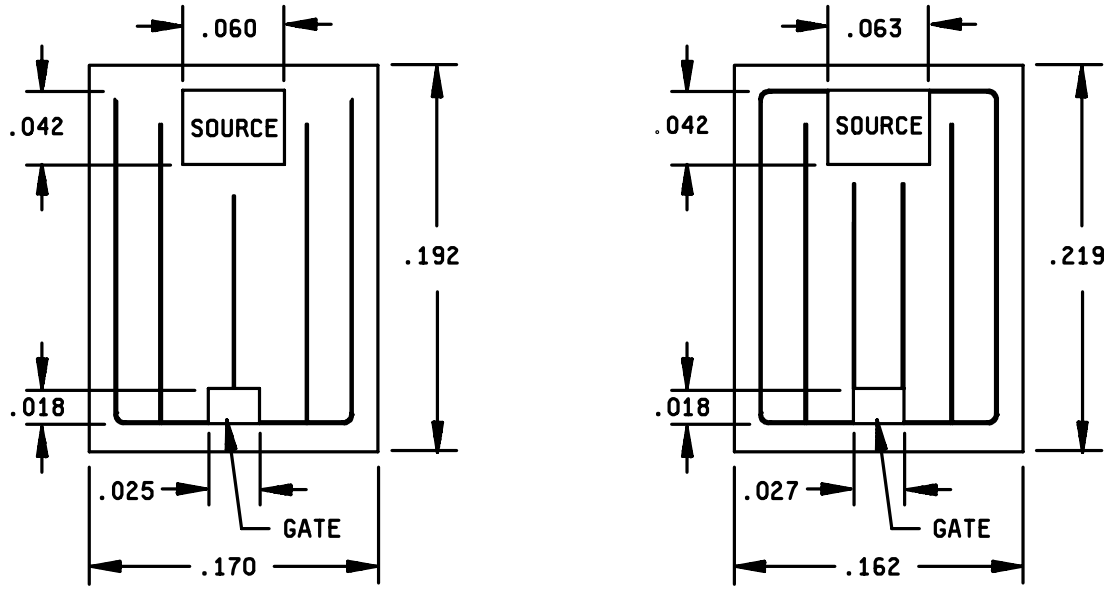

A version

Inches	mm
.018	0.46
.025	0.64
.027	0.69
.042	1.07
.060	1.52
.063	1.60
.162	4.11
.170	4.32
.192	4.88
.219	5.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±0.005 inch (0.13 mm).
4. Physical characteristics of the die thickness = .0187 inch (0.47 mm).
5. Back metal: Cr - Ni - Ag.
6. Top metal: Al.
7. Back contact: Drain.

FIGURE 3. Physical dimensions JANHC and JANKC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:51Z
Check the source to verify that this is the current version before use.