INCH POUND
MIL-P-24705/3(SH)
7 June 1990

MILITARY SPECIFICATION SHEET

PENETRATORS, MULTIPLE CABLE, FOR ELECTRIC CABLES, ROUND FRAME, FOR SQUARE-FACED BLOCKS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-P-24705

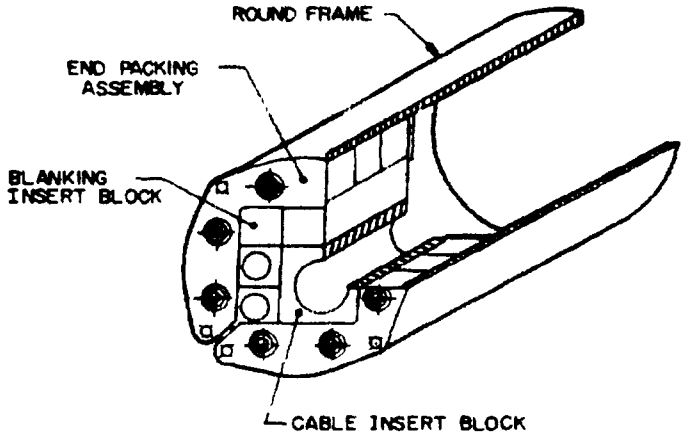


FIGURE 1. *Round multiple cable penetrator - assembled view - typical*

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, decimal tolerance is plus or minus 0.02 (0.5 mm) for dimensions with 2 decimal places or plus or minus 0.016 (0.4 mm) for dimensions with 3 decimal places
4. Unless otherwise specified, for molded rubber parts, tolerance shall be in accordance with MIL-HDBK-149

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

ASSEMBLY

Components required for each complete round metal frame multiple cable penetrator assembly specified by this specification sheet are

a. One round frame (see figure 2)
b. The appropriate round end packing assembly and all hardware (see figure 3)
c. Square-faced cable insert blocks and blanking insert blocks to fill the interior of the round end packing assembly (see figures 10, 11 and 12 of MIL-P-24705/1)

CONSTRUCTION

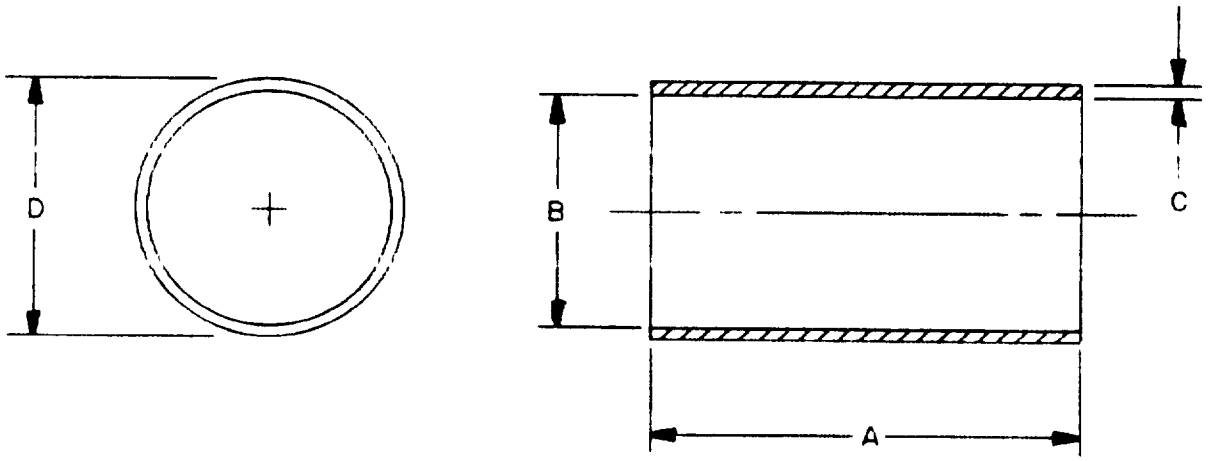


FIGURE 2. *Round frame*

TABLE I. *Round frame dimensions*

Designator1/ 2/	A (Deck)	A (Bulkhead)	B	C	D
F*3	12.0 (305.0)	4.0 (102.0)	2.90(73.7)	0.30(7.6)	3.50(88.9)
F*4			4.03(102.4)	0.24(6.1)	4.50(114.3)
F*6			6.07(154.2)	0.28(7.1)	6.63(168.4)
F*8			7.98(202.7)	0.32(8.1)	8.63(219.2)


1/ The asterisk "*" represents item material. The material shall be CRES (C) or steel (S) in accordance with MIL-P-24705.

2/ Dimensions for round frames are equivalent to American National Standard schedule 40 welded and seamless wrought pipe except F*3 which is schedule 80.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

PIN (see MIL-P-24705)

EXAMPLE

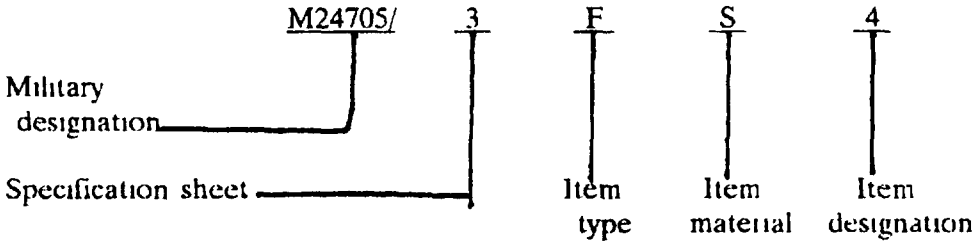

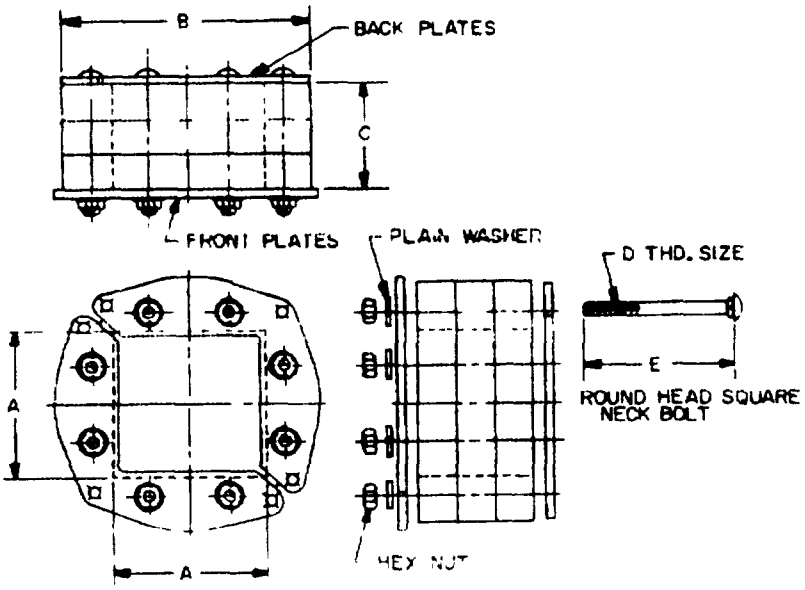


FIGURE 3. *Round end packing assembly (typical)*

TABLE II. *Round end packing assembly dimensions*


Designator	A	B	C	D	E
EN3	1.57(40.0)	2.72(69.0)	2.60(66.0)	0.250-20 UNC	3.38(85.7)
EN4	2.36(60.0)	3.90(99.0)	2.60(66.0)	0.250-20 UNC	3.38(85.7)
EN6	3.54(90.0)	5.87(149.0)	2.72(69.0)	0.312-18 UNC	3.50(88.9)
EN8	4.72(120.0)	7.83(199.0)	2.72(69.0)	0.312-18 UNC	3.50(88.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

PIN (see MIL-P-24705)

The material specified for round end packing assemblies in the military designation pertains to hardware only. The material shall be CRES (C) or steel (S). Designators EN3 and EN4 have four bolts, nuts and washers and designators EN6 and EN8 have eight bolts, nuts and washers in assembly. The item designation shall consist of a single digit corresponding to the frame designation with which the end packing is associated.

EXAMPLE

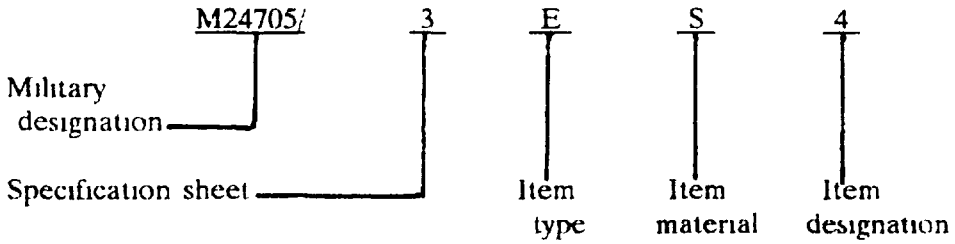

REQUIREMENTS

Nonmagnetic	When specified (see MIL-P-24705)
Durometer	81 ± 6
Compression.	2 percent (maximum)
Expansion·	1 percent (maximum)
Sample size	One BN60.
Fluid immersion	Plus or minus 5 (maximum)
Sample size	Three BN40
IR signature	Informational
Sample size	One BN60

Identification marking: Passage diameter marking shall be required on 20 mm exterior width cable insert blocks and larger. Passage diameter shall not be required on blanking insert blocks. On filler inserts, item designation and manufacturers name or logo shall be on the inserts other markings are not required. Optional markings on cable insert blocks shall consist of color code dots for matching insert block halves of a selected module size, cable diameter range in inches and manufacturers catalog numbers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

Round frame multiple cable penetrator test specimen (see figure 4).

The components shall be as specified below. Each component listed shall be required for each test specimen.

Frame	1 - F*8
End packing assembly:	1 - EN8
Two-piece square-faced cable insert blocks:	2 - BN2009/12
	1 - BN3012/15
	4 - BN3021/24
	2 - BN4022/25
Blanking insert blocks:	3 - BN20
	3 - BN30
	1 - BN40
Cables	LSDSGA-4, LSDSGU-4
	LSFSGA-4, LSFSGU-4
	LSMSCA-24, LSMSCU-24
	LSMSCA-30, LSMSCU-30
	LSMDU-6
Lubricant	MIL-S-8660

*Represents item material which may be any of the materials specified herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

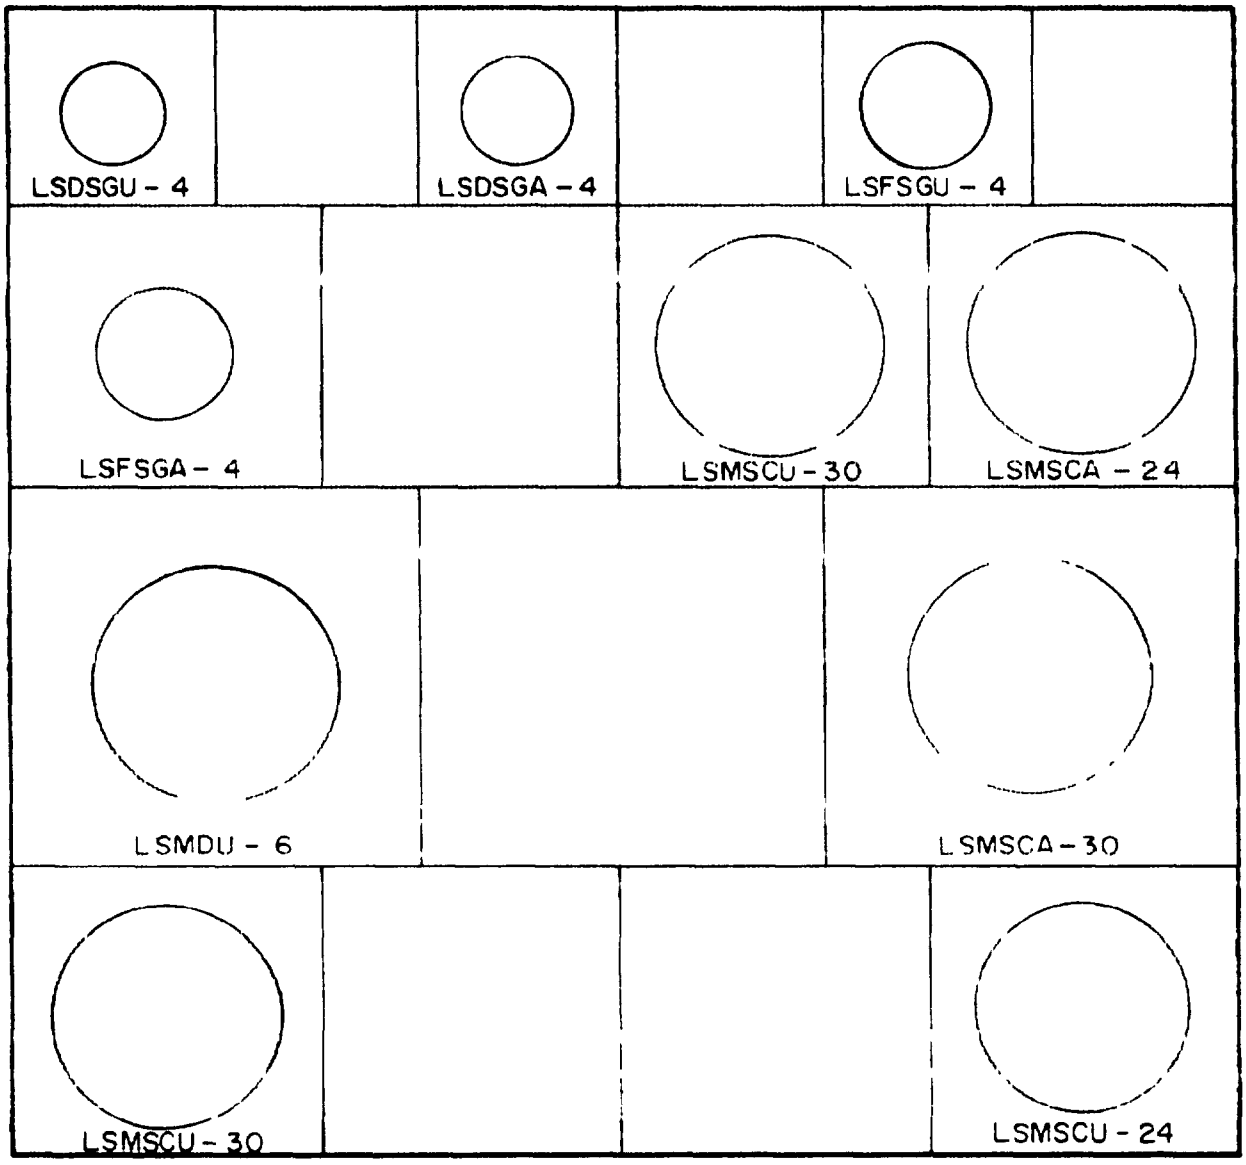


FIGURE 4. *Round frame multiple cable penetration test specimen - cable configuration*

Preparing activity
Navy - SH
(Proj. 5975-N(156)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.