INCH-POUND
MIL-PRF-24711A(SH)
May 11, 2001

SUPERSEDING
MIL-S-24711(SH)
27 October 1988
(See 6.8)

PERFORMANCE SPECIFICATION

SWITCH, PROXIMITY, SOLID-STATE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the performance, test, manufacture, and acceptance requirements for shipboard solid-state proximity switches. The switches use an inductive sensor for noncontact position sensing of metallic objects. The switches transfer power between a power source and its loads when the switch is actuated.

1.2 Classification. Solid-state proximity switches are of the following designations, as specified (see 6.2):

1.2.1 Switch designations. Switches are designated according to type of input voltage (alternating current (ac) or direct current (dc)); maximum sensing distance in inches; and output states (NO for normally open, NC for normally closed, and NONC for both normally opened and normally closed), as follows (see 6.6):

a. ac - 0.5 - NO
b. ac - 1.5 - NO
c. ac - 0.5 - NC
d. ac - 1.5 - NC
e. dc - 0.5 - NONC
f. dc - 1.5 - NONC

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 05Q, 2531 Jefferson Davis Highway, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-S-901	-	Shock Tests, H.I. (High-Impact) Shipboard Machinery, Equipment, and Systems, Requirements for.
MIL-F-24385	-	Fire Extinguishing Agent, Aqueous Film-Forming Foam (AFFF) Liquid Concentrate, for Fresh and Sea Water.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-167-1	-	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited).
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts.
MIL-STD-461	-	Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment.
MIL-STD-704	-	Aircraft Electric Power Characteristics.
MIL-STD-1399, Section 300	-	Interface Standard for Shipboard Systems Section 300 Electric Power, Alternating Current. (Metric)

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service (DAPS), 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Switch characteristics.

3.2.1 AC switches, electrical characteristics. AC switches shall be two-wire devices and shall operate in series with the load. Each switch shall have one NO or NC solid-state output.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

3.2.1.1 Operating voltage. The load and switches shall operate across a single-phase power source of 65 to 130 volts alternating current (Vac), 60-hertz (Hz). Operation for 115 Vac shall be in accordance with MIL-STD-1399, Section 300, type I (see 4.5.1).

3.2.1.2 Voltage drop. The voltage drop across each switch, during the activated (ON) state, shall be not greater than 4.0 Vac root mean square (rms) at rated load current (see 4.5.1).

3.2.1.3 Leakage current. The leakage current through each switch, during the deactivated (OFF) state, shall be not greater than 3.0 milliamperes (mA) rms (see 4.5.1).

3.2.1.4 Load ratings. The load rating of the switches shall operate as specified (see 4.5.1). The load ratings of the switches shall be as specified in 3.2.1.4.1 through 3.2.1.4.4.

3.2.1.4.1 Resistive. Switches shall have a resistive rating of 1.25 amperes rms.

3.2.1.4.2 Inductive. Switches shall operate inductive loads with a power factor between 1 and 0.35. As a minimum, switches shall have a make-current rating of 10.0 amperes rms for three cycles of the specified operating voltage and a break current rating of 1.25 amperes rms.

3.2.1.4.3 Minimum load. Switches shall operate with a minimum load of 15 mA rms.

3.2.1.4.4 Overload. Absolute overload and short circuit protection are desired. As a minimum, switches shall be protected from continuous overloads which would result in up to 6.0 amperes rms at normal output voltage. For devices which utilize a change of state of the switch from normal to overload, interruption of the operating voltage to restore normal operation of the switch after an overload has been detected is permissible. For devices which provide overload protection by current limiting as the protection logic, normal system performance shall be automatically resumed when the overload condition is rectified.

3.2.1.5 Multiple switch operation. Multiple switch operation shall be as specified (see 4.5.1).

3.2.1.5.1 Series connection. Switch designations shall operate with two identical switches in series. The total switch voltage drop at the load shall be not greater than 8.O Vac rms at rated load current.

3.2.1.5.2 Parallel connection. Switch designations shall operate with two identical switches in parallel. The total switch leakage current through the load shall be not greater than 4.0 mA rms.

3.2.1.6 Transients. Switches shall continue to operate without degradation when the operating power or output is subjected to voltage and frequency transients in accordance with MIL-STD-1399, Section 300 for 115 Vac, type I power (see 4.5.1). The spike voltage test amplitude shall be 1000 volts. The spike waveform shall be in accordance with MIL-STD-1399, Section 300. Application of a deviation in voltage over a deviation in time (dv/dt) of 1000 volts per microsecond across the output contact leads at the end of the supplied cable shall not result in false closure or opening of the output.

3.2.1.7 Ac wire colors. Wire colors shall be as follows:

NO switches	NC switches:
Black - Input	Black - Input

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

White - Output White - Output

3.2.2 Dc switches, electrical characteristics. Dc switches shall be four-wire devices and shall operate as voltage sources. Switches shall be line powered and shall have solid-state outputs. Each switch shall have one NO and one NC output in a complementary configuration. The total power drawn from the line shall be not greater than the sum of 50 mA plus the output load current.

3.2.2.1 Operating voltage. DC switches shall operate with any voltage between 10 and 30 Vdc (see 4.5.1).

3.2.2.2 Voltage drop. The voltage drop across each switch, during the activated (ON) state, shall be not greater than 1.5 Vdc at rated load current (see 4.5.1).

3.2.2.3 Leakage current. Leakage current from each output in the open (OFF) state shall be not greater than 300 microamperes with 35 Vdc applied to the switch as specified (see 4.5.1).

3.2.2.4 Load ratings. The switch shall operate as specified with the load ratings of the switch as specified in 3.2.2.4.1 through 3.2.2.4.3 (see 4.5.1).

3.2.2.4.1 Maximum current. The switches shall continuously supply 250 mA to resistive and inductive loads and 100 mA into lamp loads. The inductive load shall have a maximum decay time of 100 milliseconds when the load is interrupted. This decay shall be measured from the 90 percent level to the 10 percent level.

3.2.2.4.2 Minimum load. The switches shall supply any load current from maximum down to zero.

3.2.2.4.3 Overload. The switches shall be protected from damage due to an overload or direct short circuit of the output. For devices which utilize a change of state of the switch from normal to overload, interruption of the operating voltage to restore normal operation of the switch after an overload has been detected is permissible. For devices which provide overload protection by current limiting as the protection logic, normal system performance shall be automatically resumed when the overload condition is rectified.

3.2.2.5 Reverse polarity protection. Switches shall be immune to damage from reversal of the input power or output leads (see 4.5.1).

3.2.2.6 Transients. Switches shall continue to operate without degradation when the input power and outputs are subjected to voltage transients in accordance with MIL-STD-704 for 28-volt systems (see 4.5.1).

3.2.2.7 Dielectric withstand. Switches shall withstand a plus or minus 250 Vdc potential between switch case and each individual input and output connection for 60 seconds with less than 0.75 mA rms leakage current flow. Measurement shall be in accordance with MIL-STD-202, method 301.

3.2.2.8 Insulation resistance. Insulation resistance between the switch case and each individual input or output lead or operational power lead shall be greater than 10 megohms. Measurement shall be in accordance with MIL-STD-202, method 302, test condition A for a duration of 2 minutes. The test may be terminated before the end of 2 minutes if the measured insulation resistance is greater than 10 megohms and is steady or increasing.

3.2.2.9 Dc cable wiring. Wire colors shall be as follows:

Black - dc power high (plus lead)
White - NO output

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

Red - NC output
Green - dc power low (minus lead)

3.2.2.10 Multiple switch operation. Multiple switch operation shall be as specified (see 4.5.1).

3.2.2.10.1 Series connection. Switch designations shall operate with two identical switches in series. The total switch voltage drop at the load shall be not greater than 3.0 Vdc at rated load current.

3.2.2.10.2 Parallel connection. Switch designations shall operate with two identical switches in parallel. The total switch leakage current through the load shall be not greater than 600 microamperes.

3.2.3 Operation.

3.2.3.1 Measurements. Measurements shall be made using standard targets as specified in 3.2.3.4.1.

3.2.3.2 Head-on mode.

3.2.3.2.1 Sensing distance. The sensing distances for the switches shall be as follows (see 4.5.1):

a. For all 1.5-inch switches, the sensing distance in the head-on mode shall be 1.50 plus 0.50 minus 0.12 inches.

b. For all 0.5-inch switches, the sensing distance in the head-on mode shall be O.5 plus 0.05 minus O.05 inch.

The sensing distance of the switches shall operate as specified (see 4.5.1).

3.2.3.2.2 Hysteresis. Hysteresis distances for the switches in the head-on mode shall be as follows (see 4.5.1):

a. For all 1.5-inch switches, a minimum of 5 percent and a maximum of 40 percent of the nominal sensing distance.

b. For all O.5-inch switches, a minimum of 5 percent and a maximum of 20 percent of the nominal sensing distance.

3.2.3.3 Slide-by mode.

3.2.3.3.1 Repeatability to actuation curve. The sensing distance in the slide-by mode (see figure 1) at any distance from the sensing face, shall vary not more than plus or minus 0.12 inch from the value on the contractor's actuation curve. The repeatability shall be true over the specified voltage and temperature ranges. The repeatability shall also be true at any distance between 0.0 to 1.12 inches for all 1.5-inch switches (see figure 2), and between 0.0 to 0.38 inch for all 0.5-inch switches from the sensing face (see figure 3).

3.2.3.3.2 Actuation curve slope requirements. The slope of the actuation curve shall be as steep as possible (see figures 2 and 3). Slope of the actuation curve for 1.5-inch switches shall be not less than 45 degrees between 0.25 and 0.75 inch above the sensing face in the slide-by mode while moving the target in planes parallel to the sensing face. This slope shall be determined from measurements made at 0.25 and 0.75 inch above the sensing face.

3.2.3.3.3 Hysteresis. Hysteresis distances for the switches in the slide-by mode shall be as follows (see 4.5.1):

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

a. For all 1.5-inch switches, a minimum of 0.025 inch and maximum of 1.12 inches in parallel planes up to 1.12 inches above the sensing face.

b. For all 0.5-inch switches, a minimum of 0.01 inch and a maximum of 0.5 inch in parallel planes up to 0.38 inch above the sensing face.

3.2.3.4 Target. A typical target shall be a common grade of ferrous metal in the fully annealed condition and shall require no special treatment. The target shall not be active in any manner or magnetization. The sensor shall respond to the target bulk material properties and not to any surface finish. Target size shall be greater than 3 inches round or square for all 1.5-inch switches, and greater than 2 inches round or square for all 0.5-inch switches. Target thickness shall be not less than 0.062 inch, and the thickness shall be uniform.

3.2.3.4.1 Standard target. The standard target shall be 4130 steel 0.062 inch thick in the fully annealed condition. For all 1.5-inch switches, the standard target shall be 4 inches square. For all 0.5-inch switches, the standard target shall be 3 inches square. These standard targets shall be used to demonstrate conformance to this specification. Other target shapes, sizes, and materials may be used in service.

3.2.3.5 Response time. The switches shall change operating state within 50 milliseconds after the target is removed or inserted for any load conditions (see 4.5.1).

3.2.3.6 Adjacent metals. The switches shall operate as specified herein in the presence of metal against the back of the case or against the side of the case up to the plane of the sensing face. Metal at the level of the sensing face or above shall be at least one-half the sensing face diameter away from the edge of the sensing face (see 4.5.1).

3.2.3.7 Facing metals. The switches shall operate as specified herein in the presence of ferrous metal directly in front of the sensor face as close as three times the sensing distance. For nonferrous metals, the distance may be as close as two times the sensing distance (see 4.5.1).

3.2.3.8 Adjacent sensors. Multiple sensors shall operate as specified herein when placed side by side with the distance between adjacent edges of the switches greater than the sensing distance. Sensors shall operate as specified herein when placed face to face with the distance between sensing faces greater than six times the sensing distance (see 4.5.1).

3.2.3.9 Magnetic attraction. The sensor shall not establish a magnetic field so strong as to attract or hold dust size or larger ferromagnetic materials to the sensor face. Dust size particles shall be standard reagent quality iron powder (100 to 200 mesh) (see 4.5.1).

3.2.3.10 Switch stabilization. Switches shall stabilize to normal operation within 500 milliseconds of initial application of operating power. False output transitions shall not occur during power up when the minimum dv/dt of the applied voltage is greater than 200 volts per second (see 4.5.1).

3.2.4 Physical characteristics.

3.2.4.1 Weight. The weight of each switch, excluding the cable, shall be not greater than 7.0 pounds (see 4.4.3).

3.2.4.2 Dimensions. The distance between the mounting bolt hole centerlines shall be 3.8 inches for all 1.5-inch switches, and 3 inches for all 0.5-inch switches. Other dimensions shall not exceed those maximum dimensions shown on figures 4 and 5, as applicable (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

3.2.4.3 Cable. The contractor shall supply a resilient, UL-listed cable with each switch (see 6.5.1). The cable shall be 20 feet in length. If shielded cable is selected, the shield shall not be electrically connected to the switch case. The cable shall be selected based on previously specified color coding, adequate electrical characteristics, and the following physical properties: weatherability, moisture resistance, cold flexibility, flame retardancy, resistance to mechanical abuse, aqueous film-forming foam (AFFF) compatibility, and chemical inertness. Conductors shall be stranded. The cable outside diameter shall be not greater than 0.5 inch. The cable shall be strain-relieved and sealed into the switch (see 4.3.3).

3.2.4.4 Encapsulation. The internal electronic circuitry and cable entry shall be encapsulated (see 4.4.3). The contractor shall select an appropriate compound which will enhance the ability of the switch to meet all requirements of this specification (see 6.5.2).

3.2.5 Reliability. Switches shall have a mean-time-between-failure (MTBF) of not less than 45,000 hours or 500,000 actuation cycles at full rated load (see 4.5.2).

3.2.6 Maintainability. Switches shall be nonrepairable and nonadjustable as a final item.

3.2.7 Environmental factors.

3.2.7.1 Temperature. Switches shall operate within specified accuracy in ambient temperature ranging from minus 4 to plus 158 degrees Fahrenheit (°F) (minus 20 to plus 70 degrees Celsius (°C)) (see 4.5.3).

3.2.7.2 Humidity. Switches shall operate within specified accuracy in accordance with MIL-STD-202, method 103B, test condition B (see 4.5.3).

3.2.7.3 Vibration. Switches shall withstand type I vibration in accordance with MIL-STD-167-1. Vibration test frequency shall be from 4 to 50 Hz, inclusive. There shall be no electrical or mechanical damage to the switch and no momentary change of output states as a result of vibration testing (see 4.5.4).

3.2.7.4 Shock. Switches shall meet the shock requirements in accordance with MIL-S-901 for grade A, type A, class I, lightweight equipment (see 4.5.5). Switches shall be operational during and after the shock test. No portion of the switch shall break off or otherwise create a hazard to personnel or other components. There shall be no momentary change of output states. Undesired changes of output state shall be plotted and represented graphically in the test record.

3.2.7.5 Salt spray. Switches shall operate after being subjected to the salt spray test in accordance with MIL-STD-202, method 101D (see 4.5.6).

3.2.7.6 AFFF compatibility. Switches shall be compatible with the AFFF in accordance with MIL-F-24385 (see 4.5.8). Compatibility shall be with both liquid and foam AFFF.

3.3 Materials. Materials shall be as specified (see 4.3.3).

3.3.1 Case and mounting plate. The contractor shall select an appropriate corrosion-resistant material for the switch case and mounting plate, if used (see 6.5.3). If the material is a nonmetal, it shall be resistant to damage from asymmetric mechanical loading. Painting or other surface treatment shall not be required to provide corrosion-resistance. Surface shall not require maintenance.

3.3.2 Prohibited materials.

3.3.2.1 Asbestos. Asbestos shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

3.3.2.2 Cadmium. Cadmium shall not be used.

3.3.2.3 Mercury. Mercury in any form shall not be used in shipboard equipment, including materials and parts thereof. Mercury shall not be used in manufacturing and test processes (including test equipment such as mercury indicators) applying to the basic equipment; but may be used in the manufacturing and test processes for materials and parts provided it is used so the materials and parts themselves cannot be contaminated. No instruments containing mercury shall be used in the manufacture or testing of any equipment destined for installation on a nuclear powered ship.

3.4 Electromagnetic compatibility. Switches shall conform to the most current revision of MIL-STD-461 for surface ships and metallic hull. Switches shall be capable of operation in a space with a maximum field strength of 100 volts/meter during exposure to continuous wave frequency fields and 200 volts/meter during exposure to pulsed wave frequency fields with the supplied cable length exposed. Compliance with the following methods as a minimum is required: CE102, RE101, RE102, CS101, CS114, CS116, RS101, and RS103.

The following changes to the limits specified in MIL-STD-461 are permitted:

a. Method CS101: The applicable limit may be relaxed by 5dBuV.
b. Method CS114: The applicable limit may be relaxed by 10dBuA.
c. Method CS116: A relaxation of the pulse current requirement to 0.25 Imax may be allowed at 30 MHz.
d. Method RE101: The applicable limit may be exceeded by 10dBpt.
e. Method RS103: The switches shall not exhibit any malfunction, degradation of performance, or deviation from specified indications when subjected to square wave modulated radiated electric fields with a maximum strength of 200 volts per meter for above deck usage and 10 volts per meter for below deck usage.

3.5 Identification and marking.

3.5.1 Identification label. The contractor shall provide a label on the back (the side facing the mounting surface) of each switch. The label shall not be deteriorated by exposure to salt water, glycol, petroleum products, or salt water AFFF solution in accordance with MIL-F-24385. As a minimum, the label shall contain the following information:

a. Identification as a proximity switch.
b. Classification designation.
c. Manufacturer's code or part number traceable to date of manufacture.
d. Serial number.
e. National stock number (NSN).
f. Wiring schematic for hook-up of end function of wires by color code.
g. Note stating “DO NOT MEGGER”.
h. Manufacturer's name and address.

3.5.2 Marking requirements. Identification as a proximity switch and the NSN shall be marked on the switch so as to be readily visible when the switch is mounted. Marking shall be accomplished by raised or depressed letters not less than 0.02 inch in height or depth.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. The items designated for first article inspection (see 4.2.1) shall be subjected to the examinations and tests as specified in table I.

4.2.1 First article sample. One switch of the designation submitted (see 1.2.1) shall be subjected to first article inspection.

4.3 Conformance inspection. Unless otherwise specified (see 6.2), conformance inspection shall consist of group A examinations and tests as specified in table I (see 4.3.3).

4.3.1 Inspection lot. An inspection lot shall consist of all switches of the same designation, produced under essentially the same conditions, and offered for inspection at one time.

4.3.2 Sampling. Sampling is not required (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

TABLE I. First article and conformance inspections.

Inspection or test	Requirement	Test method	First article	Conformance inspection group A
Operating voltage	3.2.1.1 and 3.2.2.1	4.5.1	X	X
Voltage drop	3.2.1.2 and 3.2.2.2	4.5.1	X	X
Current leakage	3.2.1.3 and 3.2.2.3	4.5.1	X	X
Load ratings	3.2.1.4 and 3.2.2.4	4.5.1	X	1/ X
Sensing distance	3.2.3.2.1	4.5.1	X	X
Multiple switch operation	3.2.1.5	4.5.1	X	
Transients	3.2.1.6 and 3.2.2.6	4.5.1	X	
Reverse polarity protection	3.2.2.5	4.5.1	X	
Hysteresis	3.2.3.2.2	4.5.1	X	X
Response time	3.2.3.5	4.5.1	X	
Repeatability	3.2.3.3	4.5.1	X	
Adjacent metals	3.2.3.6	4.5.1	X	
Facing metals	3.2.3.7	4.5.1	X	
Adjacent sensors	3.2.3.8	4.5.1	X	
Magnetic attraction	3.2.3.9	4.3.3	X	
Switch stabilization	3.2.3.10	4.5.1	X	
Weight	3.2.4.1	4.3.3	X	
Dimensions	3.2.4.2	4.3.3	X	
Cable	3.2.4.3	4.3.3	X	
Encapsulation	3.2.4.4	4.3.3	X	
Materials	3.3	4.3.3	X	
Reliability	3.2.5	4.5.2	X	
Electromagnetic compatibility	3.4	4.5.7	X	
Temperature	3.2.7.1	4.5.3	X	
Humidity	3.2.7.2	4.5.3	X	
Vibration	3.2.7.3	4.5.4	X	
Shock	3.2.7.4	4.5.5	X	
Salt spray	3.2.7.5	4.5.6	X	
AFFF compatibility	3.2.7.6	4.5.8	X	
1/ Resistive load only.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

4.3.3 Production inspection (group A). Unless otherwise specified (see 6.2), production inspection shall be made on every item offered for delivery. This inspection shall include the examinations and tests which will assess the workmanship and reveal omissions and errors of the production process. Examples of tests are: functional and performance tests at a limited number of points in the required range, tests which detect deviations from design, tests of controls and adjustments, and tests which detect hidden defects of materials. Unless otherwise specified (see 6.2), production inspection shall include the examinations and tests shown in group A of table I and shall be performed as specified in 4.5.

4.4 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.5.

4.5 Test methods.

4.5.1 Operational test. Operational tests shall be performed to verify electrical and operational performance characteristics and shall meet the requirements specified herein. Measurements shall be made using standard targets as specified in 3.2.3.4.1.

4.5.2 Accelerated life test. Sample switch shall be subjected to 720 hours of continuously cycled operation in 158°F (70°C) ambient at full rated load on each output. The switching rate shall be 10 actuation cycles per minute. Switches shall be as specified in 3.2.5.

4.5.3 Temperature and humidity tests. Temperature and humidity tests shall be conducted in accordance with MIL-STD-202 and switches shall be as specified in 3.2.7.1 and 3.2.7.2. Switches shall be continuously cycled throughout the test.

4.5.4 Vibration. The switch shall be subjected to the type I vibration test in accordance with MIL-STD-167-1 and shall be as specified in 3.2.7.3. Switch circuits shall remain energized and appropriately loaded throughout the test. A monitoring system capable of sampling at a rate of 100 samples per second or more shall be used to monitor switch outputs throughout the test. Any undesired changes of output state shall be plotted and represented graphically in the test record. For each part of the vibration test, test time shall be divided equally with the test assembly and switch configured with target and without target present (that is, switch actuated and deactuated). Failure to conform to 3.2.7.3 and 4.5.4 shall be cause for rejection.

4.5.5 Shock. The switch shall be subjected to the high-impact shock test for grade A, type A, class I, lightweight equipment in accordance with MIL-S-901 and shall be as specified in 3.2.7.4. Switch circuits shall remain energized and appropriately loaded throughout the test. A monitoring system capable of sampling at a rate of 100 samples per second or more shall be used to monitor switch outputs throughout the test. Test shall be repeated with target and without target present (that is, switch actuated and deactuated), for a total of eighteen shock blows. Failure to conform to 3.2.7.4 shall be cause for rejection.

4.5.6 Salt spray. Switches shall be tested in accordance with method 101, test condition A of MIL-STD-202 and shall be as specified in 3.2.7.5. Evidence of excessive corrosion that will cause a failure of the switch shall be cause for rejection.

4.5.7 Electromagnetic compatibility. Switches shall be tested in accordance with MIL-STD-461. In addition, normal operation shall be demonstrated in pulsed and continuous wave radio frequency fields throughout the frequency ranges of 2 to 32 MHz, 108 to 400 MHz, and 2 to 18 gigahertz, with the attached cable exposed and the switch housing connected to the circuit ground. Switches shall be as specified in 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

4.5.8 AFFF compatibility. Switches shall be immersed to one-half of their length in a bath of AFFF for 96 continuous hours. The bath shall be a solution of 6 percent AFFF in a 5 percent concentration of salt water. The solution and the ambient temperature shall be 95ºF (35ºC). The solution shall be kept agitated enough to keep the unimmersed part of the switch covered with foam. The switches shall be as specified in 3.2.7.6. After immersion, switches shall be cycled a minimum of once per minute for ten minutes. If the switch does not open and close for any of the cycles, it shall constitute a failure.

5. PACKAGING

5.1 Packaging For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. The proximity switches are for use in position sensing applications.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of the specification.
b. Designation of switches required (see 1.2).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1).
d. When first article inspection is required (see 3.1).
e. If conformance inspection is other than specified (see 4.3).
f. Sampling basis for production inspection (group A) if other than specified (see 4.3.3).
g. Examinations and tests for production inspection (group A) if other than specified (see 4.3.3).
h. Packaging requirements (see 5.1).

6.3 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Definitions. Terms used in this specification are defined in 6.4.1 through 6.4.16 and graphically shown on figure 1.

6.4.1 Sensing face. The sensing face is a surface of the proximity switch or photoelectronic sensor reacting to an alternating electromagnetic field or radiant energy source.

6.4.2 Reference axis. The reference axis is perpendicular to the sensing face and passes through its center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

6.4.3 Target. Target refers to the item, material, or configuration that a sensor is intended to detect.

6.4.4 Mode of operation. Mode of operation is the direction of actuator travel in relation to the sensing face of the sensor.

6.4.5 Head-on mode. Head-on mode indicates when the actuator is parallel and centered on the sensitive face of the sensor, and its path of travel is perpendicular to the sensitive face along the reference axis. The performance criteria are given as dimensions from the sensing face to the leading edge of the actuator.

6.4.6 Slide-by mode. Slide-by mode indicates when the actuator and its path of travel are parallel to the sensing face of the sensor. The performance criteria are given as dimensions from the reference axis to the leading edge of the actuator.

6.4.7 Actuation point. The actuation point is the point at which the target approaching the sensing face is detected.

6.4.8 Deactuation point. The deactuation point is the point at which the target leaving the sensing zone is no longer detected.

6.4.9 Hysteresis. Hysteresis is the distance between the actuation point and the deactuation point measured in the direction of target travel. In the head-on mode, it is measured along the reference axis. In the slide-by mode, it is measured in a plane parallel to the sensing face along a line perpendicular to the reference axis passing through the reference axis in the direction of target travel.

6.4.10 Sensing distance. Sensing distance is the perpendicular distance from the actuation point to the sensing face in the head-on mode. It is the perpendicular distance from the actuation point to the reference axis in the slide-by mode.

6.4.11 Repeatability. Repeatability is the maximum shift in the sensing distance when the switch is operated anywhere within specified parameter limits.

6.4.12 Source. Source is the device which switches a positive voltage to a load. The current flows through the sensor and into the load.

6.4.13 Sink. Sink is a device which switches the load to ground. The current flows through the load and into the sensor before being switched to ground.

6.4.14 Complementary proximity sensor. A complementary proximity sensor features a normally open and a normally closed output, both of which can be used simultaneously.

6.4.15 Make current rating. Make current rating is the maximum surge current a device will conduct when energizing a load.

6.4.16 Break current rating. Break current rating is the steady-state current flowing in a device at the time current is interrupted.

6.5 Application guidance notes.

6.5.1 Cable recommendations. Omniguard 2, Dekoron TPE on Plenum cable, or Belden Plenum cables have demonstrated physical properties appropriate to this specification. Other cables, including NSN 6145-00-110-2262, may be equally appropriate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

6.5.2 Potting compound recommendations. Rigid epoxy in accordance with MIL-I-16923, self-extinguishing, is an example of a suitable compound for encapsulation.

6.5.3 Casing material recommendations. Stainless steel (316) has attractive chemical and physical properties for the switch casing mounting plate, if used.

6.6 Switch designations. Switch designations (see 1.2.1) are constructed as follows:

XX - Y.Y - ZZZZ
XX - Type of input voltage.
Y.Y - Maximum sensing distance.
ZZZZ - Output states.

6.7 Subject term (key word) listing.

Aqueous film forming foam
Head-on mode
Hysteresis
Inductive sensor
Sensing face

6.8 Changes from previous issue. Marginal annotations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

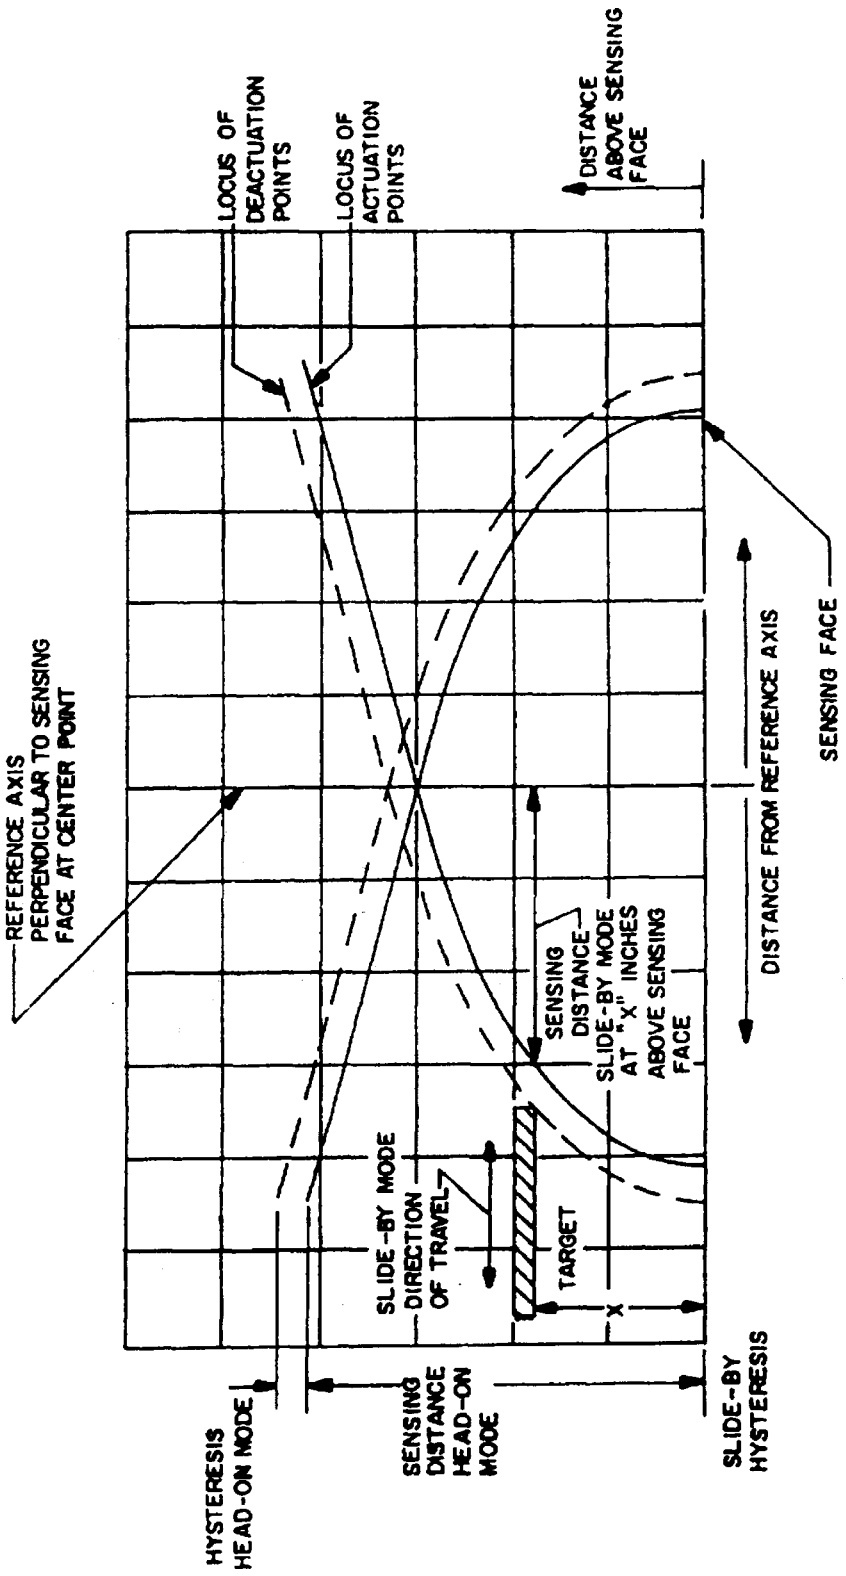


FIGURE 1. Actuation curve with hysteresis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

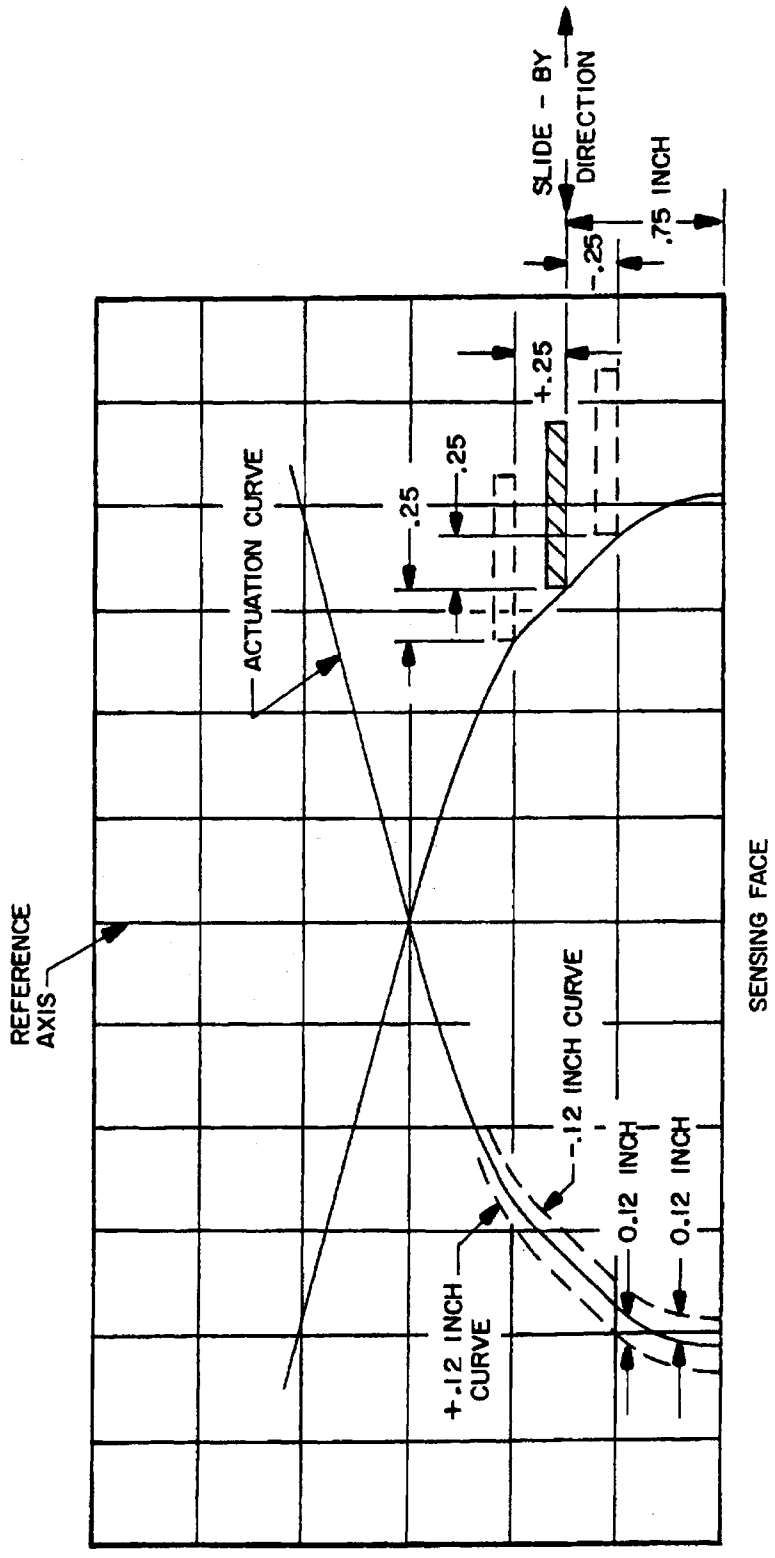


FIGURE 2. Repeatability curve slide-by mode, 1.5-inch switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

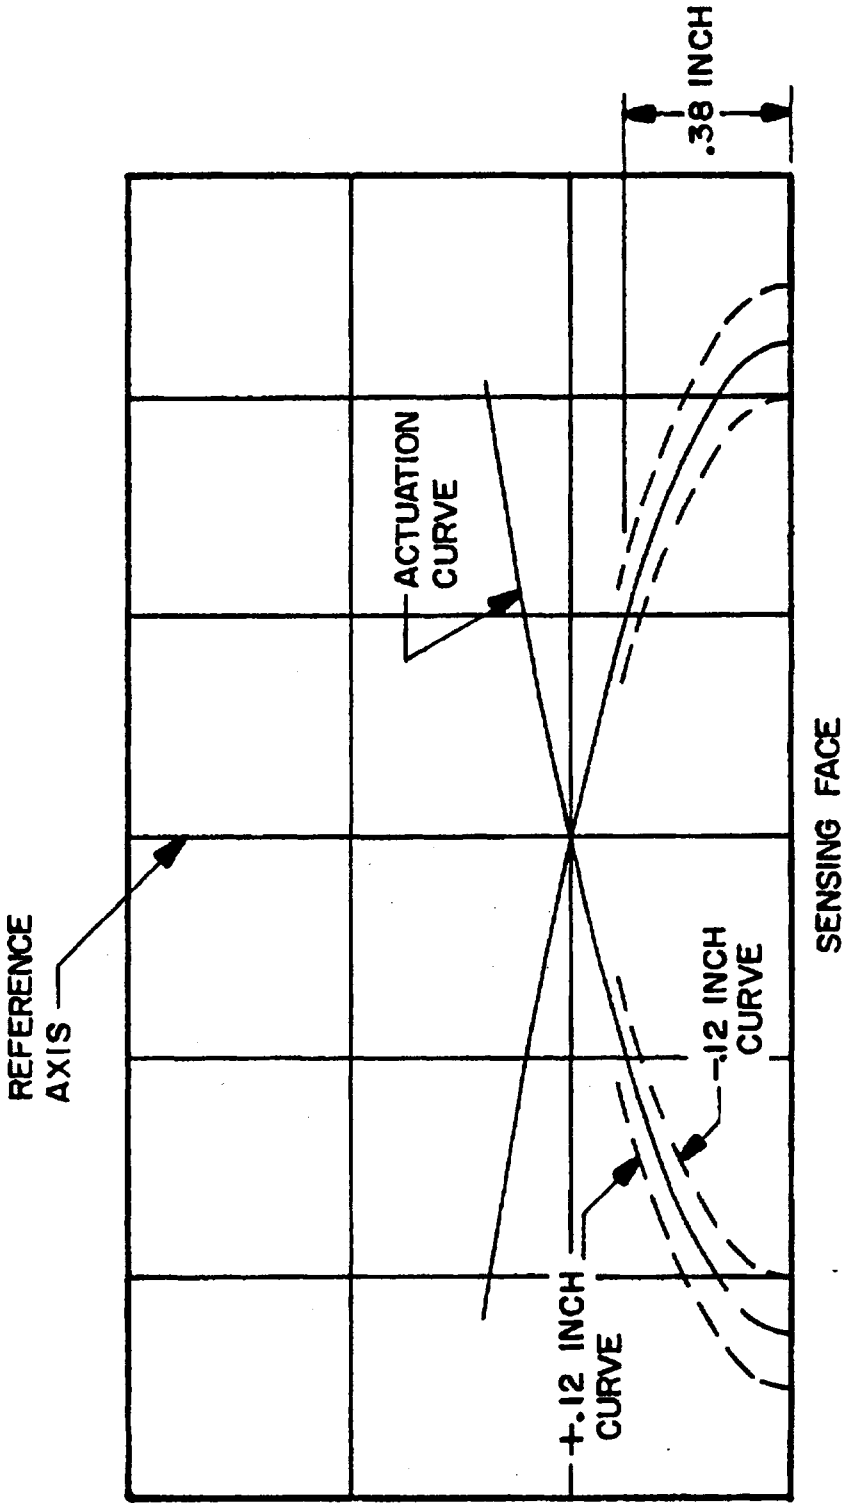


FIGURE 3. Repeatability curve, slide-by mode, 0.5-inch switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

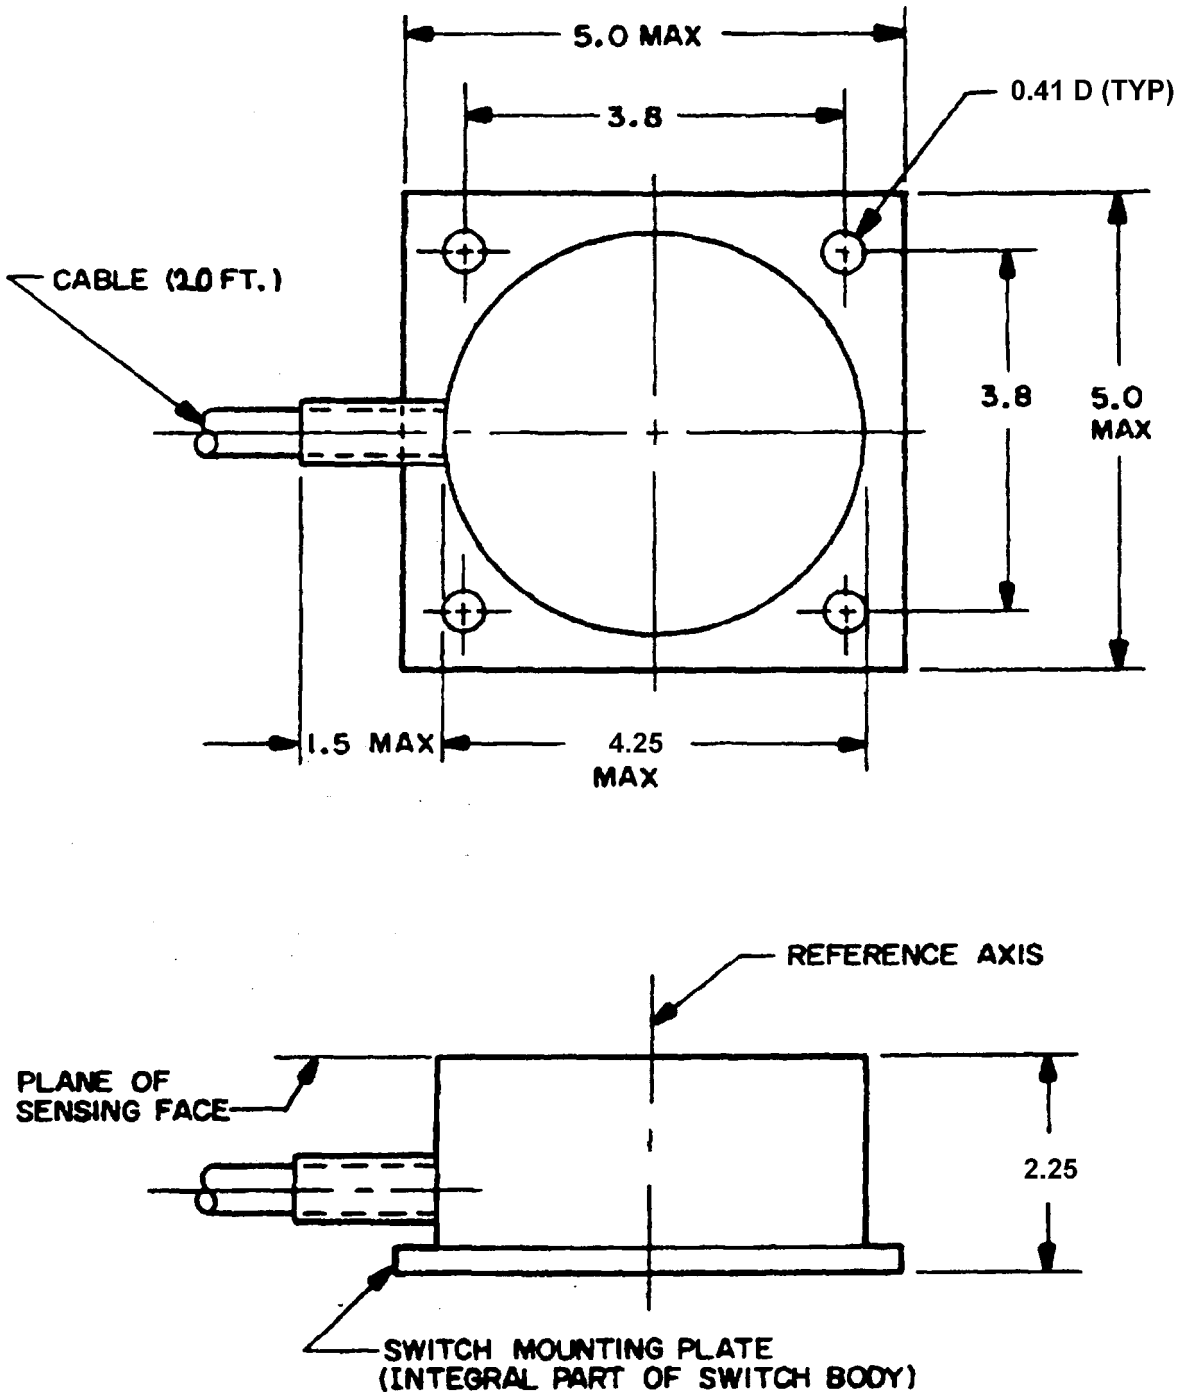


FIGURE 4. Outline dimensions for dc-1.5-NONC, ac-1.5-NO, or ac-1.5-NC switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

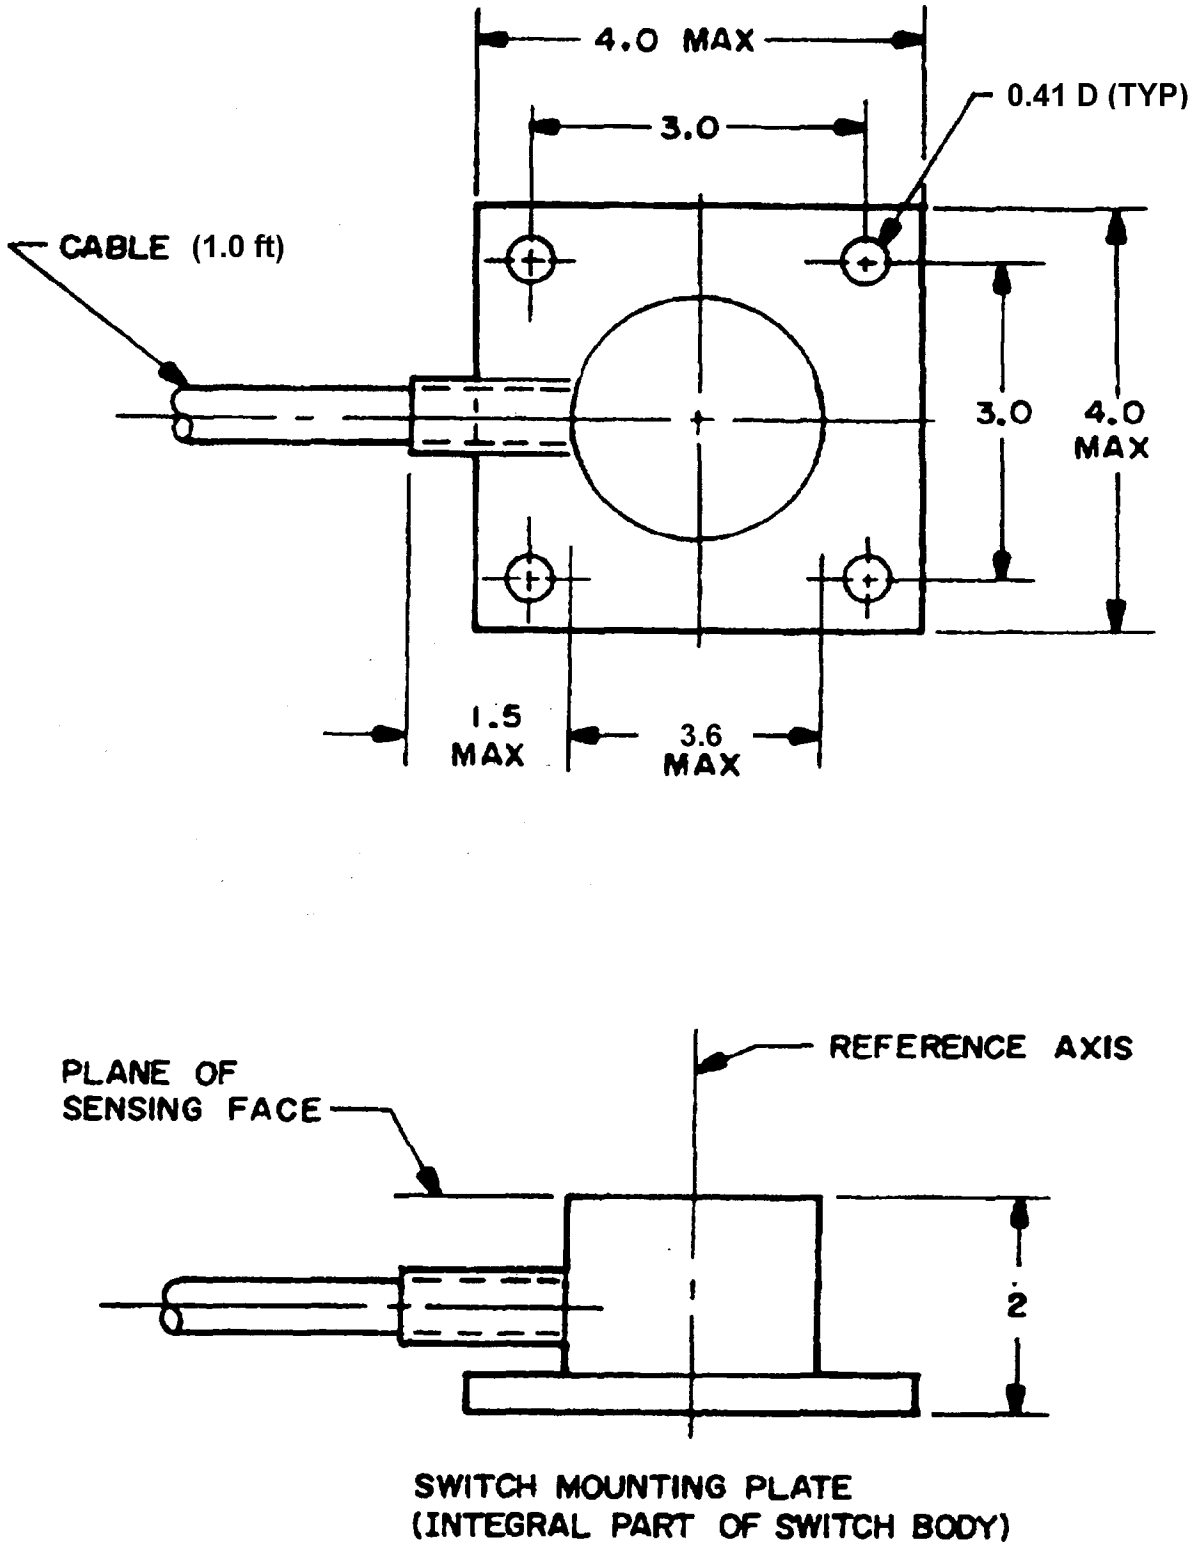


FIGURE 5. Outline dimensions for dc-0.5-NONC, ac-0.5-NO, or ac-0.5-NC switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - SH
(Project 5930-N776)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-24711A (SH)	**2. DOCUMENT DATE (YYYYMMDD)** 20010511

3. DOCUMENT TITLE SWITCH, PROXIMITY, SOLID-STATE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC) Mr. Kenneth Brayton, SEA 05P7	b. TELEPHONE *Include Area Code)* (1) Commercial (202) 781-3678 (2) AUTOVON 326-3678
c. ADDRESS *(Include Zip Code)* Commander, Naval Sea Systems Command ATTN: SEA 05Q, 2531 Jefferson Davis Hwy Arlington, VA 22242-5160	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John Kingman road, Suite 2 533 Ft. Belvoir, VA 22060-2533 Telephone (703) 767-6888 AUTOVON 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:14Z
Check the source to verify that this is the current version before use.