UU-C-1387B
July 16, 1976
SUPERSEDING
Int.Fed.Spec.UU-C-001387A(GSA-FSS)
April 27, 1972

FEDERAL SPECIFICATION

CAPS, FOOD HANDLERS, PAPER, WHITE, ADJUSTABLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for paper caps with headband capable of being adjusted to the required size.

1.2 Classification.

1.2.1 Types. The caps shall be of the following types, as specified (see figure 1):

Type I - Overseas.
Type II - Skull.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-676 - Boxes, Setup.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks, and the Index of Federal Specifications and Standards, from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Technical Association of the Pulp and Paper Industry (TAPPI) Test Methods:

T 401 - Fiber Analysis of Paper and Paperboard.
T 402 - Standard Conditioning and Testing Atmospheres for Paper, Board, Pulp Handsheets, and Related Products.
T 403 - Bursting Strength of Paper.
T 410 - Weight per Unit Area (Basis Weight or Substance) of Paper and Paperboard.
T 414 - Internal Tearing Resistance of Paper.
T 452 - Brightness.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, One Dunwoody Park, Atlanta, GA 30341.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, NW., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Paper. The paper for the headband and crown shall comply with the requirements specified in table I, when tested in accordance with 4.2.1.1.

TABLE I. Requirements for paper in caps

Characteristics		Headband	Crown	Crown
		Types I & II	Type I	Type II
Fiber content - bleached chemical fibers, minimum	percent	95	95	95
Basis weight before coating application, 24 x 36-500, minimum	pounds	58	30	14
Brightness, minimum	percent	70	70	70
Bursting strength, minimum	psi			
Dry		17	12	5
Wet		6	4	1
Tearing resistance, minimum	grams			
Machine direction		100	50	20
Cross direction		110	60	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

3.2 Coating. The coating for the headband, both its type and its presence, shall be an option of the supplier. The coating, if used, must be odorless, colorless, tasteless, and free from dirt or other foreign matter. It must also not soften, peel, or flake off during usage.

3.3 Design and construction. The design of caps shall be either type I - overseas, or type II - skull (see figure 1), as specified. Other details of construction shall be as specified in 3.3.1 through 3.3.3.2.

3.3.1 Headband. The headband shall be made of paper conforming to the applicable requirements specified in table I. The lower portion of the headband which touches the head shall be continuously adjustable from a head size of 6-7/8 to 7-1/2, inclusive.

3.3.2 Crown. The crown shall be constructed from paper conforming to the applicable requirements in table I.

3.3.3 Seams. Seams shall be stronger than the materials which they unite, and shall meet the requirements of 3.3.3.1 or 3.3.3.2, as applicable.

3.3.3.1 Sewn seams. When tested as specified in 4.3.1, seams shall not separate and stitches shall not break prior to tearing of paper. Seams should not unravel or separate during usage.

3.3.3.2 Bonded seams. When tested as specified in 4.3.1, materials united by an adhesive bond shall not separate from each other without either tearing or leaving a residue of paper or fibers on the adhesive.

3.4 Size of caps. When adjusted to size 6-7/8 in accordance with manufacturer's instructions (see 6.3), the circumference of the band shall be 21-5/8 ± 1/4 inch. When fully expanded to size 7-1/2 in accordance with the manufacturer's instructions, the circumference of the band shall be 23-1/2 ± 1/4. When adjusted to the required size and placed properly on the head, the paper shall not tear (see table II). The cap must be able to be readjusted, if necessary, for proper fit.

3.5 Color. The color for both headband and crown shall be white.

3.6 Workmanship. The finished cap shall be clean, well made, and shall conform to the quality standards established in the specification. Caps shall be free from defects which may affect their durability, serviceability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certificate.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection of components and materials. Quality assurance provisions for components and materials shall be in accordance with this specification and with subsidiary specifications referenced herein to the extent applicable, except that this specification govern in the event of conflict. For the purpose of inspection, the lot shall consist of all components and materials of the same classification, received at one time from one source of supply and checked for the manufacturer's identifying lot, code, or batch number. In the event of conflict between sample size indicated herein and the referenced specifications or standards, the sample size indicated herein shall prevail.

4.2.1.1 Component testing. Five sample units shall be taken at random from each lot or batch and tested as specified in table II. The sample units shall be as follows:

For testing of paper:
Headband - 15 sheets, each sheet 12 by 12 inches in area, or a total of 15 square feet of paper.
Crown - Same amount of paper as required for testing headband.

If any sample unit fails to meet any requirement for paper specified in table I, the entire lot of material shall be considered as having failed to meet the requirements of this specification.

TABLE II. Test methods for components and materials

Characteristic	Requirement reference	Test method	Requirement applicable to		Results reported to nearest	Determinations per sample unit
		TAPPI No.	Sample unit	Lot average		
Bleached chemical fiber content	Table I	T 401	....	composite	Multiple of 5 percent	2 per composite
Basis weight	Table I	T 410	....	X	Pound	1
Brightness	Table I	T 452	....	X	Percent	6
Bursting strength	Table I	T 403	....	X	psi	10
Tearing resistance						
Machine direction	Table I	T 414	....	X	Gram	5
Cross direction	Table I	T 414	....	X	Gram	5

4.2.2 End item inspection.

4.2.2.1 Visual examination of end item. Caps shall be examined for visual defects in table III. The sample unit shall be one cap. The inspection level shall be S-3 and the acceptable quality level 2.5 percent defective. If the number of visual defects in the sample for inspection exceeds the acceptance number specified in MIL-STD-105, the entire lot of caps shall be considered as having failed to meet the requirements of the specification.

TABLE III. Visual and dimensional defects in caps

Examination	Defects
	VISUAL EXAMINATION
Appearance	Not white.
Workmanship	Not clean; any discoloration or mark affecting appearance or serviceability.
Construction	Hole, tear, or cut.
	Crown not securely sewn or bonded to headband.
	Covering, if present, flakes or peels off.
	Cannot be properly adjusted and placed on head without tearing or ripping or be readjusted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE III. Visual and dimensional defects in caps (con.)

Examination	Defects
	VISUAL EXAMINATION (con.)
Construction (con.)	Seams not properly secured at ends; stitches unravel and seams separate. Broken stitches.
	Stitches extend beyond edge of cap, affecting appearance.
	DIMENSIONAL EXAMINATION
Circumference of headband	When adjusted to size 6-7/8, does not measure 21-5/8 ± 1/4 inch.
	When fully expanded to size 7-1/2, does not measure 23-1/2 ± 1/4 inch.

4.2.2.2 Dimensional examination of end item. Caps shall be examined for dimensional defects listed in table III. The sample unit shall be one cap. The inspection level shall be S-3 and the acceptable quality level (AQL) 2.5 percent defective. If any cap fails to meet any dimensional requirement for which examination is made (see table III), the cap shall be considered defective. If the number of defective caps exceeds the sample number specified in MIL-STD-105, the entire lot of caps shall be considered as having failed to meet the requirements of this specification.

4.2.2.3 Testing of end item. Caps shall be tested as specified in 4.3 for strength of seams. The sample unit for test shall be two caps. The inspection level shall be S-3 and the acceptable quality level (AQL) 2.5 percent defective. If any cap fails the test specified in 4.3, the sample unit shall be considered defective. If the number of defective sample units exceeds the acceptance number specified in MIL-STD-105, the entire lot of caps shall be considered as having failed to meet the requirements of this specification.

4.2.3 Examination of preparation for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table IV. The sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 expressed in percent defective.

TABLE IV. Classification of preparation for delivery defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components or distortion of container.
Contents	Number per container is more or less than required. Net weight exceeds box specification requirements.

4.2.3.1 Examination of closure, waterproofing, and banding of containers. When shipping containers are required to comply with PPP-B-636, examination for defects in closure, waterproofing, and banding shall be in accordance with the appendix to PPP-B-636.

4.3 Seam strength test. Test all sewn or bonded seams in caps as follows: Holding each piece of paper in a parallel plane, attempt to separate each seam by pulling evenly in opposite directions. If any seams fail to meet the requirements of 3.3.3.1 or 3.3.3.2, as applicable, the cap shall be considered defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Levels A and B. One hundred (100) caps of one description only shall be packed in a box conforming to PPP-B-566 or PPP-B-676. The unit container shall be closed in accordance with the appendix of PPP-B-566 or PPP-B-676, as appropriate.

5.1.2 Level C. Caps shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving agency.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Ten (10) boxes, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636, class weather-resistant. The shipping container shall be closed, waterproofed, and banded in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Ten (10) boxes, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636, class domestic. The shipping container shall be closed in accordance with the appendix to PPP-B-636.

5.2.3 Level C. Caps, in quantities as specified (see 6.2), shall be packed in a container complying with the Uniform Freight Classification or the National Motor Freight Classification, as applicable. The containers shall be packed to assure carrier acceptance and safe arrival at destination.

5.3 Marking.

5.3.1 Civil agencies. The unit and shipping container shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. The unit and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Paper caps are intended for use in kitchens, galleys, and mess halls, and the like, for hygienic purposes during the preparation and serving of food.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Marking required (see 5.3.1 and 5.3.2).


6.3 The manufacturer shall provide instructions for adjusting the caps, as printed on the headbands of each cap.

CIVIL AGENCY COORDINATING ACTIVITY:


VA - DMS

Preparing activity: GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

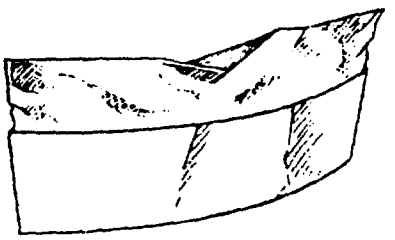

Type I - Overseas

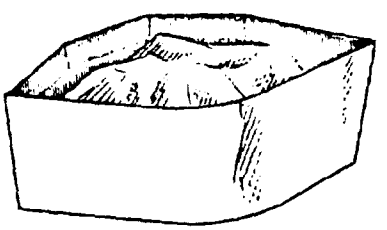

Type II - Skull

FIGURE 1 - FOOD HANDLERS CAPS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.