[INCH-POUND]
A-A-50569
January 10, 1997
SUPERSEDING
MIL-W-28581C
8 April 1994

COMMERCIAL ITEM DESCRIPTION

WARDROBES: CLOTHING, COMPOSITE WOOD AND METAL

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description covers wardrobes for clothing storage for intended use by unaccompanied military personnel in government quarters.

2. CLASSIFICATION. Wardrobes covered by this commercial item description are of the following type, size, class, and style as specified (see 7.2, 7.3, and table I).

Type I - Open above wardrobe	1
Type II - Scribed to the overhead with filler panels	2
Size A - 36 inches (914 millimeters (mm)) wide	A
Size B - 42 inches (1 067 mm) wide	B
Class 1 - 8 feet (2 438 mm) high with hatshelf	1
Class 2 - 7 feet 6 inches (2 286 mm) high without hatshelf	2
Style A - Three-door	A
Style B - Two-door	B

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 1581), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 7105

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Design. Each wardrobe shall consist of two compartments: a clothes hanging compartment and an overhead storage compartment. The left door (determined by facing the wardrobe) shall be provided with the latching and locking mechanism. The active door is fastened with a padlock securing all doors. Doors shall be particleboard, surfaced front and back with laminated plastic sheets. The sides, back, and horizontal components shall be particleboard or steel. A minus tolerance of not greater than 0.50-inch (13 mm) is permitted for the overall wardrobe height where required to facilitate installation without damage to ceiling surface. Unless otherwise specified (see 7.2), wardrobes shall be provided in a knocked-down (KD) condition, complete with all necessary components and hardware required to provide a unit capable of being assembled without drilling, cutting, or other modification of components or subassemblies.

3.2 Standard commercial product. The wardrobe shall, as a minimum, be in accordance with the requirements of this commercial item description and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this commercial item description but which are a part of the manufacturer's standard commercial product is, shall be included in the wardrobe being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Wardrobe styles.

3.3.1 Wardrobe style A. When style A wardrobes are specified, the clothes hanging compartment shall be provided with two doors hinged at each side of the wardrobe, and the overhead storage compartment shall be provided with a single door hinged at the top. The overhead storage compartment door shall latch automatically when closed and shall be capable of being released only from the interior.

3.3.2 Wardrobe style B. When style B wardrobes are specified, both the clothes hanging compartment, and the overhead storage compartment shall be completely enclosed by two doors hinged at each side of the wardrobe.

3.4 Construction.

3.4.1 General. All dimensions, sizes, and thicknesses of materials shall not be less than specified herein unless otherwise noted. Two basic materials, except for the doors (see 3.1 and 3.4.5), at manufacturer's option, shall be particleboard with welded aluminum frame, or all steel with welded frame. The material option selected shall be used for all components on the same contract. That is: If the particleboard option is selected, the wardrobes shall be aluminum framed with all major components such as sides, top, back, bottom, and shelves of particleboard; if the steel option is selected, the wardrobes shall be steel framed with all major components of steel. Wardrobe bases shall be in accordance with 3.4.4. When towel bars are specified, they shall be mounted on the exterior of the wardrobe sides (see 3.6.6). When feasible, towel bars shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

located on the side or sides least exposed to view. Steel wardrobe sides used for mounting towel bars shall be reinforced and the bar fastened by through bolting. All screw and bolt ends projecting into the wardrobe interior shall be covered.

3.4.2 Particleboard option. The particleboard components shall be 0.50-inch (13 mm) thick, except that the hatshelf and the particleboard core for doors shall be 0.75-inch (19 mm) thick. The sides and back shall extend the full height and depth of the wardrobe, less the base height. Top, intermediate bottom, hat shelf, and bottom shall occupy the full interior width and depth of the wardrobe, except the hatshelf shall be 15 inches (381 mm) deep.

3.4.2.1 Aluminum frame. Front and back frames shall be welded and constructed of extruded aluminum shapes. Edges of joining frame members shall meet flush, be uniform, without gaps, and free of sharp edges, burrs, or other visual defects.

3.4.2.2 Particleboard assembly.

3.4.2.2.1 Particleboard. Particleboard shall weight not less than 42 pounds per cubic foot (19 kilograms (kg) per cubic meter), at 6 to 9 percent moisture content. The particleboard shall have the following physical properties determined in accordance with ASTM D 1037.

Modulus of elasticity	-	425,000 pound-force per square inch (psi) (2 930 272 kilopascal (kPa)) minimum (min)
Modulus of rupture	-	2,700 psi (18 616 kPa) (min)
Internal bond	-	80 psi (345 kPa) (min)
Swelling (thickness)	-	10 percent maximum
Screw holding (face)	-	280 pounds (127 kg) (min)
Screw holding (edge)	-	235 pounds (107 kg) (min)

3.4.2.2.2 Sides to front and back frames. The wardrobe sides shall be fastened to the front and back frames by being through bolted.

3.4.2.2.3 Back to back frame. The back shall be inserted into the vertical frame members and fastened at each of the three connector angles on each side.

3.4.2.2.4 Horizontal components. The horizontal components shall be supported at the sides by channels and angles. The underside of the upper storage unit shall be 18 inches (457 mm) from the top of the wardrobe. The upper storage unit shall be capable of sustaining not less than 150-pound (68 kilograms (kg)) load for not less than five minutes. After five minutes the unit shall not indicate any sway or sag of the bottom and front frame; nor interference with door operations, or latching of the storage compartment.

3.4.3 Steel option. The front frame shall be 18 gauge steel. The horizontal members shall be inset on the vertical members, accurately aligned and jigged. The matching frame surfaces shall be spot welded and the interior intersections tack welded. The edges of the joining members shall meet flush, uniformly, and without gaps. The horizontal frame members at the top and at the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

front of the intermediate bottom shall be reinforced at the center by rail fillers spot welded thereto. When style A wardrobes are specified, the elbow catch shall be secured at the center of the rail filler with the catch operating lever extending below the rail filler. The catch shall be accurately positioned to secure the storage compartment door in the closed position by acting on the upper door strike fastened to the door interior surface.

3.4.3.1 Steel assembly. The sides and back shall be of three-piece construction joined by folding vertical edges of the back or sides. The front frame and sides shall be joined to form a closed channel forming a double thickness secured on each side with four equally spaced sheet metal screws. Joggle strips and "Z" bar supports shall be used for securing the horizontal components to the sides and back, and securely and permanently spot welded thereto. The clothes hanging rod bracket shall be spot welded to the sides. The clothes hanging rods with capped ends shall be installed in the brackets. The steel horizontal components, consisting of the top, intermediate bottom, hatshelf, and bottom, shall be provided with a flange not less than 0.75-inch (19 mm) at each side and open channels at the back. The top, bottom, and intermediate bottom shall be reinforced at the underside by a 0.75-inch (19 mm) hat section extending the full width of the component. The top shall be secured to the sides and back "Z" bar supports by not less than two screws on each side and back. The front of the top shall be secured with two screws and the intermediate bottom shall be secured to the sides by inserting the flanges into joggle strips. The front and back channel formations shall intermember with, and be secured to, similar matching formations. The back shall be secured with not less than two fasteners and the front secured by not less than three fasteners. The hatshelf shall be fastened at the sides and back in the same manner as the intermediate bottom. In addition, the closed box section at the front of the hatshelf shall be secured to integral lock tabs. When a separate base is provided, prior to installation of the wardrobe bottom, the sides and back shall be secured to the base (see 3.4.4.2.2) by not less than two screws at each side and at the back. The bottom shall then be secured to the base at the front corners.

3.4.4 Bases. Unless otherwise specified (see 7.2), wardrobe base shall be 4 inches (102 mm) high and recessed at the front not less than 1.25 inches (32 mm). Unless otherwise specified (see 7.2), particleboard constructed wardrobes shall be provided with separate bases. Manufacturers shall have the option of providing separate or integral bases for steel constructed wardrobes. Bases shall be plywood (see 3.4.4.2.1) when particleboard option is selected, and steel when the steel option is selected. When specified (see 3.6.9), a vinyl wall base shall be bonded to the wardrobe front toe space and sides. Vinyl wall base shall be one continuous piece on both individual and group installations, except "island type" installations. "Island type" installations shall be covered by not more than two pieces with the ends cut square and meeting flush at the center of the wardrobe sides. The vinyl wall base shall be bonded in accordance with the manufacturer's instructions.

3.4.4.1 Integral steel base. When the integral base is provided for steel constructed wardrobes, the base shall be formed by extending the sides, back and front frame to the floor. The bottom of the sides, back, and front frame shall form channels in lieu of flanges for additional stability.

Source: https://assist.dla.mil --Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

3.4.4.2 Separate bases.

3.4.4.2.1 Plywood base. Base corners shall be fastened by full-length solid wood corner blocks securely screwed and glued. Hardwood blocks shall be centered on each side of the base top for securing the wardrobe bottom. When wardrobes are to be fastened to the floor, installation angles shall be provided for each side of the base. Installation angles shall be aluminum or steel. Steel installation angles shall be zinc coated or similarly treated for corrosion resistance. Plywood for bases shall be not less than 5 plies, 0.75-inch (19 mm) thick and, face and back veneers grade 2 or better. Plywood used for bases shall be treated for resistance to moisture, fungus, and insect infestation. The treated plywood shall be dimensionally stable, clean, and glueable.

3.4.4.2.2 Steel base. The steel base may be fabricated from four pieces with overlap at each corner and fastened by spot welding. The bottom flanges and top horizontal sections shall be overlapped and spot welded. The bottom flanges and top horizontal sections shall be overlapped and spot welded. The bottom flanges or gussets shall be punched for anchoring the base to the floor. For additional stability, each bottom flange corner shall be gusseted. The base design shall allow for adjustment of the wardrobe front-to-back and side-to-side to accommodate installation conditions. This feature shall be limited to a total travel of not greater than 0.75-inch (19 mm), and shall provide not less than 1.25-inch (32 mm) toe space.

3.4.5 Doors. All wardrobe doors shall be 0.75-inch (19 mm) thick particleboard covered on both sides with laminated plastic sheets. Exteriors of doors shall be covered with decorative laminated plastic sheets and interiors shall be covered with nondecorative laminated plastic sheets. The bottom and side edges of the top storage compartment door shall be self-edged with the same decorative laminated plastic as used on door exterior. The laminated plastic shall be bonded to the particleboard with urea resin adhesive. The assembly periods, clamping, or pressing time shall be in accordance with the adhesive manufacturer's instructions to ensure a permanent and secure bond. All edges and corners of laminated plastic shall be beveled smooth to eliminate sharp edges. Each door shall be secured to the frame with three hinges. When reinforcement pads or threaded plates are used on the unexposed side of the front frame to secure the hinge screws, the pads or plates shall be permanently secured to the frame members. The gap between the doors and the frame shall be uniform on all sides, and within a 0.125-inch (3 mm) limitation. The exposed surface of the offset leaf between door face and hinge barrel shall be not greater than 0.063-inch (2 mm). On steel framed wardrobes, the front edge of the inactive door shall be covered by a steel edge channel and the front edge of the active door shall be covered by a steel astragal. The steel channel and astragal for the door edges shall be finished in the same color as the front frame. The back edge of the steel channel and astragal shall be secured with sheet metal screws. On aluminum framed wardrobes, the inactive door front edge shall be covered by an aluminum molding and the active door front edge shall be covered by an aluminum astragal. The aluminum molding and astragal shall be secured with flat head, countersunk sheet metal screws. The channel, molding, and astragal fasteners shall be spaced not more than 9 inches (229 mm) apart, except on steel channel construction, where screws shall not be placed so as to interfere with the cam finger. Edges of wardrobe doors, including the top edge of the top storage compartment door, not covered by the channel, molding, or astragal, shall be finished in accordance with 3.5.5 or shall be self-edging. When specified (3.6.7 and 7.2), the mirror shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

fastened to the active door, with the top of the mirror approximately 70 inches (1 778 mm) above the floor and centered on the door width. On wardrobes with steel sides, coat and hat hooks (see 3.6.5) shall be fastened to the back of the inactive door. The left door shall be provided with a three-point latching and locking mechanism. All doors shall close against rubber bumpers. The doors shall close without the necessity of exerting pressure at the door top or bottom to allow the rods to pass the strikes or extend into the frame openings.

3.4.6 Door handle. The rectangular corrosion-resistant steel door shield shall be secured to the door at each corner and shall butt against the door astragal. The handle keeper shall be fastened through the door with two carriage bolts and nuts. The square shank of the carriage bolt shall be inserted into the punched square holes in the keeper and shield. The door back shall be counterbored as necessary so the bolt ends and nuts are flush. The cap nut shall be secured to the spindle and tightened only to the extent to permit operation of the handle with normal pressure.

3.4.7 Retaining rods and guides. Each retaining rod shall operate through two rod guides. One guide for each rod shall be secured to the door as close to the door top and bottom as possible when the door handle is in the open position. The remaining two guides shall be located as close to the middle of the rods as possible without interfering with the side movement of the rods. On wardrobes with a steel frame, the retaining rods shall secure the active door in the closed position by simultaneously extending into the front frame at top and bottom. The openings in the front frame shall be reinforced to provide a strong bearing surface. On an aluminum framed wardrobe, the retaining rods shall secure the active door in the closed position at the top and bottom by simultaneously engaging behind steel strikes secured to the aluminum frame. The finger on the cam shall extend beyond and behind the inactive door thereby providing the third point of the locking system. A strike plate shall be secured to the back of the inactive door to avoid damage by the cam finger.

3.5. Finishes.

3.5.1 Aluminum finish. Aluminum extrusions, channels, and angles shall be etched and anodized in accordance with manufacturer's standard practice, and given two coats of catalyzed butyrate clear lacquer baked for 15 minutes at 250 degrees Fahrenheit (°F) (121 Celsius (°C)) or as recommended by the lacquer manufacturer.

3.5.2 Steel coating and finish. Unless specified (see 7.2), all wardrobe components fabricated from steel, other than corrosion-resisting steel, shall be treated, coated, and finished in accordance with manufacturer's standard practice.

3.5.3 Particleboard finish. The particleboard panels (see 3.4.2.2.1) shall be given a two-coat application of a one-component, air-drying, oil-modified polyurethane resin coating. The exterior sides and exposed back coatings shall be pigmented. The gloss range for the pigmented exterior coatings shall be in the range of 45 to 65 when measured with a 60° glossmeter. The color shall be as specified (see 7.2). Coating of all particleboard interior surfaces and exterior of the back, when not exposed, shall be clear. Application of the polyurethane resin coatings shall be in accordance with the manufacturer's instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

3.5.4 Painted finishes. Painted finishes shall be smooth, without dirt, dust, or other foreign matter embedded. The finishes shall not be discolored, rippled, peeled, have sags or runs.

3.5.5 Particleboard edge sealer. Unless edges of wardrobe doors are covered, they shall be filled to smoothness, sanded, and coated with a pigmented catalyzed alkyd-urea conversion or polyurethane plastic finish. Pigment shall be a close match to the color of the decorative plastic sheet on the door exterior surface.

3.5.6. Laminated plastic sheets. Finish, pattern, and color shall be as specified (see 7.2). Decorative laminated plastic sheets shall be 0.03-inch (0.8 mm) thick. Nondecorative laminated plastic sheets shall be 0.03-inch (0.8 mm) thick.

3.6 Hardware.

3.6.1 Door locking and latching mechanism. The active door shall be provided with a three-point latching and locking mechanism. The handle shall be of the lever type, of cast brass or bronze with an integral lug having a hole to receive a padlock shackle. Centerline of handle shall be 41 inches ±0.50-inch (1 041 mm ±13 mm) above the floor. Locking shall be accomplished by padlocking the handle to a 0.13-inch (3 mm) thick chromium-plated steel keeper located above the handle which contains a matching hole. A 0.062-inch (2 mm) thick rectangular corrosion-resistant steel shield shall be provided to protect the door from damage by the padlock. The keeper and shield shall be punched with two matching square holes in each to accommodate the square shank of the carriage bolts. The carriage bolt shank shall be long enough to extend through both the keeper and shield, when assembled. The carriage bolt shall be 1/4-20, 1-inch (25 mm) long with a head diameter of 0.45-inch (11 mm) ±0.02-inch. Exposed portions of the handle shall have satin chromium plating. The shield and keeper shall have a satin finish to match the handle. The carriage bolt heads shall have a satin chromium plating or shall be bright zinc plated and lacquered. Interior components shall be barrel cadmium plated. The handle nut shall be either a self-locking nylon insert nut, a self-locking thread nut, or a cap nut with a roll pin or set screw.

3.6.2 Hinges. The door hinge shall be brass or steel, with not less than 0.062-inch (2 mm) thick leaves, 5-knuckle, fast spun pin type with not less than 0.156-inch (4 mm) minimum pin diameter, 2.50-inch (64 mm) long joint, and finished in satin chromium. When doors are closed, only the joint shall be exposed. Both wings of the hinge shall be swaged. The leaf shall wrap-around the door with an off-set of not greater than 0.875-inch (22 mm) for acceptance of the door thickness. The hinge frame leaf shall be provided with three countersunk holes and the door leaf shall be provided with four countersunk holes. One of the holes in the door leaf shall be located to permit screwing into the door edge.

3.6.3 Clothes hanging rod. The clothes hanging rod shall be bright finish corrosion-resistant clad steel tubing with an outside diameter of 1.0625 inches (27 mm) and a wall thickness of not less than 0.087-inch (2 mm). On wardrobes with particleboard sides, flanges for securing the rod to the sides shall be polished chromium finished steel. On wardrobes with steel sides, the brackets shall be 12 gauge steel. Clothes hanging rods with exposed ends shall be provided with plastic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

caps to avoid marring the finish of the sides. Centerline of clothes hanging rod shall be 2.5 inches (64 mm) from underside of intermediate bottom, and 11.50 inches (292 mm) from backside of wardrobe. The clothes hanging rod shall be capable of supporting 160 pounds (73 kg) evenly distributed with not greater than a 0.125-inch (3 mm) deflection.

3.6.4 Elbow catch and strike. When style A wardrobes are specified, the elbow catch shall be steel, cast iron or cast brass, with a dull nickel plated or satin chromium plated finish. The head of the elbow catch lever shall be not less than 0.25-inch (6 mm) deep to avoid slipping the strike off the lever head. The upper door strike shall be not less than 16 gauge, corrosion-resistant (stainless) steel and shall be fabricated. The steel strike fastened to the door interior surface shall secure the door in the closed position. The center front of the intermediate bottom shall be bored at an angle for operation of the elbow catch from the clothes hanging compartment. The elbow catch shall be secured to an aluminum angle with flathead, self-tapping machine screws. The aluminum angle shall be fastened by through bolting to avoid being loosened by the action of the door strike on the elbow catch. To avoid exposed ends of bolts, cap nuts or acorn nuts shall be used on the underside of the intermediate shelf. Washers and lock-washers shall be provided under the nuts. The elbow catch shall be protected against tampering by the 0.50-inch (13 mm) high door stop section of the frame member.

3.6.5 Coat and hat hook. Each wardrobe shall be provided with two coat and hat hooks. Coat and hat hooks shall be placed on the right interior side of wardrobe for class 1, and placed on the inside face of right door of wardrobe for class 2.

3.6.6 Towel bar. When specified (see 7.2), a towel bar shall be furnished for each wardrobe. Bar shall be not less than 0.625-inch (16 mm) square, corrosion-resistant steel tubing with chromium plated brackets, and shall be not less than 18 inches (457 mm) long. When two wardrobes are installed side-by-side in a corner, two towel bars shall be installed on the accessible side. The towel bars should be installed one above the other, spaced to permit the draping of a standard bath towel over each bar without contacting each other or the floor.

3.6.7 Mirror. When specified (see 7.2), a mirror approximately 12 by 18 inches (305 by 457 mm) shall be provided for size A wardrobes, and a mirror approximately 14 by 20 inches (356 by 508 mm) shall be provided for size B wardrobes. Mirrors shall conform to type I, class 1, mirror glazing quality of ASTM C 1036. Mirror edges shall be polished smooth. The back shall be completely silvered and covered with a heavy coat of copper. Mirror plating shall be protected by an organic coating. Two aluminum or chromium plated steel "Z" type strips and two side clips shall be provided for fastening the mirror to the door. The "Z" strips shall extend the full width of the mirror. Felt strip shall be provided to envelop the mirror edges to avoid metal contacting the mirror edges.

3.6.8 Label holder. When specified (see 7.2), a steel label holder finished in satin chromium plating and capable of holding a card or label approximately 2.75 by 1.50 inches (70 by 38 mm) shall be secured to the inactive door. The label holder shall be centered on the door width, approximately 5 feet (1 524 mm) above the floor.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:44Z
Check the source to verify that this is the current version before use.

3.6.9 Wall base. When specified (see 7.2), vinyl wall base shall be provided. Style A (straight) vinyl wall base is for use with carpeted floors. Style B (cove) vinyl wall base is for use with resilient tile floors. The vinyl wall base shall be 0.125-inch (3 mm) thick, 4 inches (102 mm) high unless base height other than 4 inches (102 mm) is specified (see 3.4.4). If wardrobe base height is other than 4 inches (102 mm), the vinyl wall base height shall match the wardrobe base height. Unless otherwise specified (see 7.2), the wall base color shall be black.

3.6.10 Miscellaneous hardware. Miscellaneous hardware items used in fastening wardrobe components, such as sheet metal screws, nuts and bolts, tee-nuts, and machine screws, shall conform to industry thread requirements. Miscellaneous hardware shall be chromium plated or similarly plated to prevent rusting, oxidation, or electrolytic action.

4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of FED-STD-376B, and all other requirements of this commercial item description including form, fit, and function are met. If a product is manufactured to metric dimensions and these dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformances.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

7. NOTES.

7.1 Source of documents.

7.1.1 Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.


7.1.2 The Federal Acquisition Regulation (FAR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.3 ASTM Standards are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2925.

7.2 Ordering data. Acquisition documents should specify the following:

a. Type, size, class, and style of wardrobes required (see 2).
b. When wardrobes are to be other than KD condition (see 3.1).
c. When height or recess of wardrobe base is to be other than as specified (see 3.4.4).
d. When separate bases for particleboard or steel constructed wardrobes are to be specified (see 3.4.4).
e. When mirrors are required (see 3.4.5 and 3.6.7).
f. When the method of treating, coating, and finish for steel is to be specified (see 3.5.2).
g. Color of pigmented coating for particleboard (see 3.5.3).
h. Finish, pattern, and color of decorative laminated plastic sheets (see 3.5.6).
i. When towel bars are required (see 3.6.6).
j. When label holders are required (see 3.6.8).
k. When vinyl wall base is required (see 3.6.9).
l. Color of wall base if other than as specified (see 3.6.9).

7.3 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

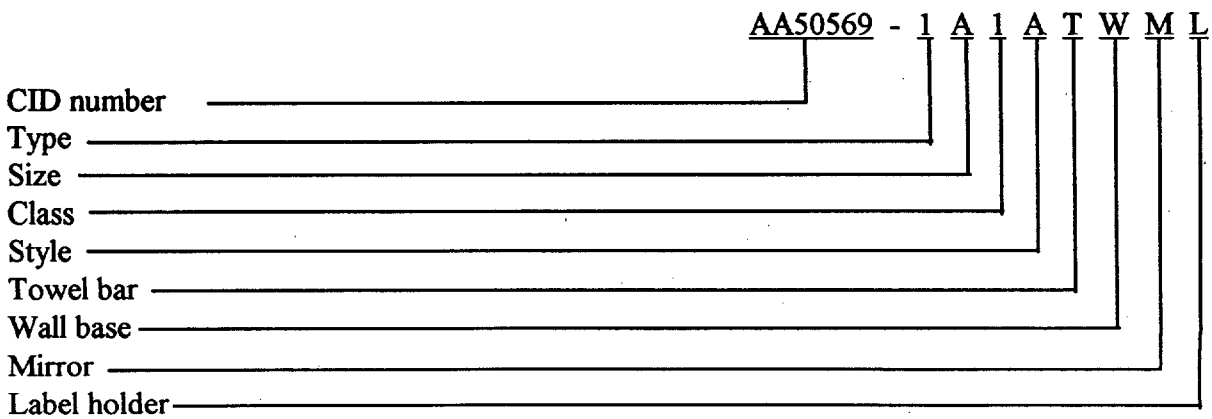

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

The above PIN is for a Type I (open wardrobe), Size A (36 inches (914 mm) wide), Class 1 (8 feet (2 438 mm) high with hatshelf), Style A (three door) wardrobe with a towel bar, wall base, mirror and label holder (see table I).

TABLE I. PIN designators.

	Type		Size		Class		Style		Towel bar		Wall base		Mirror		Label Holder	
	I	II	A	B	1	2	A	B	Reqd	Not reqd	Reqd	Not reqd	Reqd	Not reqd	Reqd	Not reqd
Pin Designator	1	2	A	B	1	2	A	B	T	X	W	X	M	X	L	X

7.4 Subject term (key word) listing.

Cabinet
Closet
Clothes rod
Laminated plastic
Laminated wood
Mirror
Particleboard
Plywood
Storage
Towel bar

MILITARY INTERESTS:

Custodians:

Navy - YD1
Air Force - 99

Review Activities:

Navy - MC
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Navy YD1

(Project 7105-0283)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-50569	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE
WARDROBES: CLOTHING, COMPOSITE WOOD AND METAL

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME ROBERT J. BRICKEY	b. TELEPHONE *(Include Area Code)* (1) Commercial 805-982-5593 (2) AUTOVON 551-5593
c. ADDRESS *(Include Zip Code)* COMMANDING OFFICER, NCBC CODE 1581B 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.