INCH-POUND

A-A-55221
September 10, 1993

COMMERCIAL ITEM DESCRIPTION

TUNIC, MATERNITY

The General Services Administration has authorized the use of this commercial item description in preference to MIL-T-29375.

Abstract. This commercial item description covers a green polyester wool maternity tunic to be worn by female personnel in the U.S. Marine Corps.

Salient characteristics. The tunic shall be hip length, sleeveless, with a front pleat insert, center back slide closure, two back darts, one bust dart on each side, and no collar. The front shall have a center pleat insert with ornamental stitching (see Figure 2). The pleat shall start 3-1/8 ± 1/16 inches below the neckline. There shall be two back waist adjustment tabs. The tabs shall have two buttons with reinforced 18-line stay buttons on the inside. The second button shall be 1-1/2 inches from the center of the first button. Each button shall be shank wrapped. The buttonholes shall be horizontal eyelet-end-taper-bar type, well-worked-over gimp, with the gimp purling pulled through to the underside, and centered on each tab 3/4 inch from the pointed end of the tab. All raw edges of the tunic shall be overedged. The neck and arm openings, and waist adjustment tabs shall be topstitched 1/4 inch from the edge. The finished tunic shall be pressed smooth with a heated pressing iron or pressing machine.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Materials. The basic material of the tunic shall be cloth, serge, two up-two down right hand twill weave, using a single spun yarn blended of 77% to 83% polyester fiber and 17% wool fiber of 62's U.S. standard or finer grade, and woven with 100% continuous filament texturizing polyester yarn into an end and end, pick and pick arrangement in both warp and filling directions. The minimum width shall be not less than 60 inches exclusive of the selvages. The basic material shall conform to the requirements in Table I.

TABLE I. Basic Material Physical Requirements

Characteristic	Requirement	Test method
Weight (ounces per linear yard (56 inches wide)	10.5 - 11.0	ASTM D-3776 (option C)
Colorfastness to:		
Laundering	Class 4	AATCC 61 Test 1A 2/
Crocking	Grade 3	AATCC 8
Light	"good"	AATCC 16 1/
Yarns per inch (minimum)		
Warp	65	ASTM D-3775
Filling	55	ASTM D-3775
Breaking strength, pounds (minimum)		
Warp	160	ASTM D-5034
Filling	140	ASTM D-5034
Tearing strength (pounds)		
Warp	6.0	ASTM D-1424
Filling	6.0	ASTM D-1424
Dimensional stability	± 2.5 % in either direction	AATCC 99
Pilling	Class 4-slight pilling	ASTM C-3511

1/ The time of exposure shall be 40 standard fading hours.

2/ For yarn use 2 to 6 grams of the applicable material, so held together to form a unit for testing unless otherwise specified in the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Interlining. The interlining for the front neck and armhole facings, back neck and armhole facings and waist adjustment tabs shall be a nonwoven web, thermally bonded by heat activated fibers or powders. The web shall be either flat or print bonded substrate with polyamide adhesive. The color shall be oxford grey. The interlining shall conform to the following requirements in Table II:

TABLE II. Interlining Physical Requirements

Characteristic	Requirement	Test method
Weight (ounces per square yard)		
Minimum	1.7	ASTM D-3776
Maximum	2.6	ASTM D-3776
Breaking strength, pounds (minimum)		
Machine direction	3.0	ASTM D-5034
Crosswise direction	2.0	ASTM D-5034
Shrinkage (maximum)		
After 20 launderings	1%	AATCC 96 Opt. Vc 2/ 3/ 4/
Bond strength (per inch of width) minimum		Federal Standard 191
Initial	22/splits	5951 1/
After 20 launderings	18/splits	5951 1/

1/ Splits means that during the test, the fusible material cannot be removed from the outer shell. This will cause the fusible material to split from itself than separate from the outershell.

2/ Sample size shall be 22 inches by 22 inches with 18-inch benchmarks, 6 inches apart.

3/ Use drying procedure (D), or samples may be dried using a thermostatically controlled circulating oven 221° - 230° F until dried. The sample shall be allowed to cool for 5 minutes, sprinkled with water to permit damp pressing, and allowed to stand in this condition for 5 minutes.

4/ The dampened specimens shall be pressed with a flatbed press as described in AATCC 96 Section 5.2, or a hand iron as described in AATCC 96 Section 5.10 at a temperature of 275° - 300° F. Section 7.4 of AATCC 96 shall not apply.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Buttons. The sewing-hole buttons for the waist adjustment tab shall be melamine formaldehyde composition, flat, with a 4-hole center, recessed ring, and a glossy finish. The buttons shall be 30-line, and the color shall match Green Shade AF, Cable No. 62017. The stay button shall be a sewing-hole button, with a melamine formaldehyde composition, flat and with four holes. The stay button shall be 18-line, and the color shall match Green Shade AF, Cable No. 62017.

Slide fasteners. The slide fastener shall be non-separating, non-reversible, automatic or cam lock size LS (commercial No. 4). The slide fastener shall have a short pull tab. All the components of the slide fastener shall be brass and furnished by the same supplier. The tape shall be cotton, synthetic, or a combination of both. The length of the slide fastener shall be 20 inches for all sizes. The color of the slide fastener shall be Green shade, Cable No. 66531 (see quartermaster Standard Shades of Slide Fastener Tapes). The dyed slide fastener tape shall show "good" colorfastness (Class 4) when tested in accordance with AATCC 61.

As an alternate, a plastic coil fastener shall be used. The slide fastener shall be made of polyester or nylon consisting of an automatic or cam lock, and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton, polyester and cotton, or polyester, and shall have a minimum width (one side) of 7/16 $\pm$ 1/8 inch.

Thread. A cotton or cotton-covered polyester thread shall be used and shall conform to the following requirements in Table III:

TABLE III. Thread Physical Requirements

Operation	Type	Tex	Breaking strength
Buttonholes	mercerized	40	2.6 pounds
Seams and stitchings	soft finish	40	1.8 pounds
Overedging	soft finish	30	1.5 pounds
Buttons	glazed	105	5.3 pounds

Sizes. The tunic shall be provided in the following sizes:

Extra-small
Small
Medium
Large
Extra-large

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

NOTE: Extra-small, Small, Medium, Large and Extra-large may be abbreviated as XSM, SM, MED, LG, and XLG.

Label/marking

Combination label. The tunic shall have a combination-identification and instruction label conforming to Type VI, class 10 and 14 of DDD-L-20. The colorfastness to laundering requirements shall apply. The label shall have the following inscription:

TUNIC, WOMEN, MATERNITY
FIBER CONTENT: Polyester (80%) and Wool (20%) (Example)
SIZE: Small (Example)
STOCK NO.: 8415-00-000-0000 (Example)
CONTRACT NO.: DLA-CG-00000-0 (Example)
NAME OF CONTRACTOR:
MACHINE WASH: WARM. LINE OR TUMBLE DRY. IF TOUCH-UP IS DESIRED, USE COOL IRON. WASH DARKS SEPARATELY. DO NOT BLEACH.

Size label. The label for the tunic shall conform to Type VI, class 2 of DDD-L-20, and shall read as follows:

Size: Small (Example)

Label/tag. Each tunic shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on each tunic and causes no damage to the tunic.

Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1-1/2 inches for hemming the bottom of the tunic, 5/8 inch seam allowance for joining the side seams and 3/8 inch seam allowance for all other seams. Commercial patterns may be used in lieu of the Government-furnished pattern provided they conform to the cited design and finished measurements.

Sizes and measurements. The finished tunics shall conform to the measurements shown in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished Measurements

Size	A Half bust	B Back length
Extra-small	17-1/2	25-1/2
Small	18-1/2	26
Medium	20	26-1/2
Large	21-3/4	27
Extra-large	23-1/2	27-1/2
Tolerance	+ 1/2	+ 1/2

NOTE: All measurements shall be taken with the tunic laid smooth and flat. A and B refers to Figure 1.

A. Bust. Measurement shall be taken with tunic back closure closed, across front of tunic from folded edge to folded edge at pit of armhole.

B. Back length. Measurement shall be taken from the top of neckline to bottom edge of tunic.

Workmanship. The finished tunics shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the contractor's own quality assurance standards and the quality assurance standards defined by the technical data in the bid package.

Product demonstration model. When required, offerers shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:45Z
Check the source to verify that this is the current version before use.

Quality assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

Examination

Visual examination. The tunics shall be examined for the defects listed below. The lot size shall be expressed in units of tunics. The sample unit is one tunic.

Defects. The tunics shall be examined for the following defects:

Pressing	Omitted, burned, scorched, gloss, wrinkles or creases, bulky edges
Material	Any hole, cut, tear, needle chew, burn, mend, multiple float, loose or unslightly slub or shade bar color not as specified; any spot or stain (outside), shaded parts, overall uncleanness, color not as specified
Component assembly	Any component part misplaced, omitted, or not securely affixed; any component part twisted, distorted, pleated, damaged or otherwise defective
Seam and stitching	Seam irregular, unevenly gaged, missing, weak, broken, loose or tight tension, skipped, puckered, twisted, pleated or wavy, ends of stitching bartacked or overlapped by another seam less than 1/2 inch
Buttonholes	Not corresponding to size of button, slanted, positioned vertically, loose tension, stitches broken or skipped, not shank wrapped
Buttons	Missing, incorrect or illegible, not securely sewn

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:45Z
Check the source to verify that this is the current version before use.

Labels	Missing, incorrect or illegible, not positioned or stitched as specified
Label/tag	Bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar-coded type not as specified; code density not as specified.

Cleaning. After completion, the finished tunics shall be cleaned, and all loose thread, lint, and foreign matter removed.

Dimensional examination. The finished tunics shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one tunic.

Packaging examination. The fully packaged shipping containers shall be examined in accordance with the defects listed below. The lot size shall be the number of shipping containers in the inspection lot.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted, incorrect, illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items is not as specified on shipping container

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source of non-Government documents

ASTM Manual

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Manual

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

Custodian:
Navy - MC


Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8410-0812

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:45Z
Check the source to verify that this is the currentversion before use.

shall be made at sub below rated output.

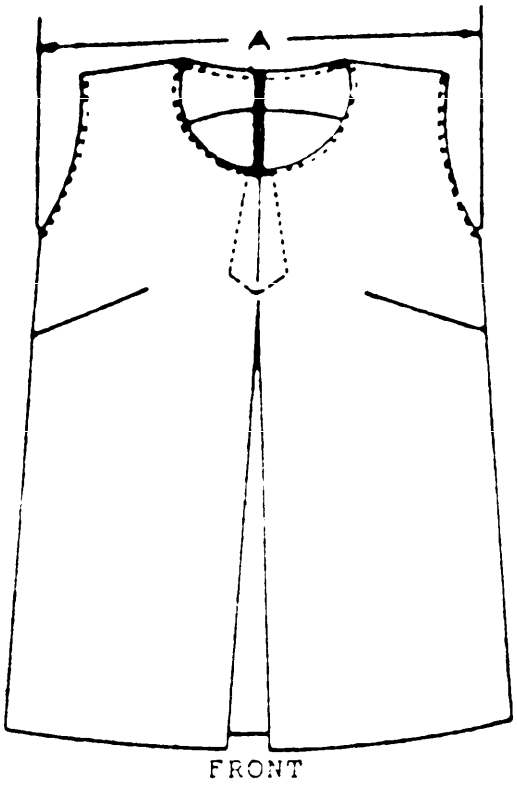

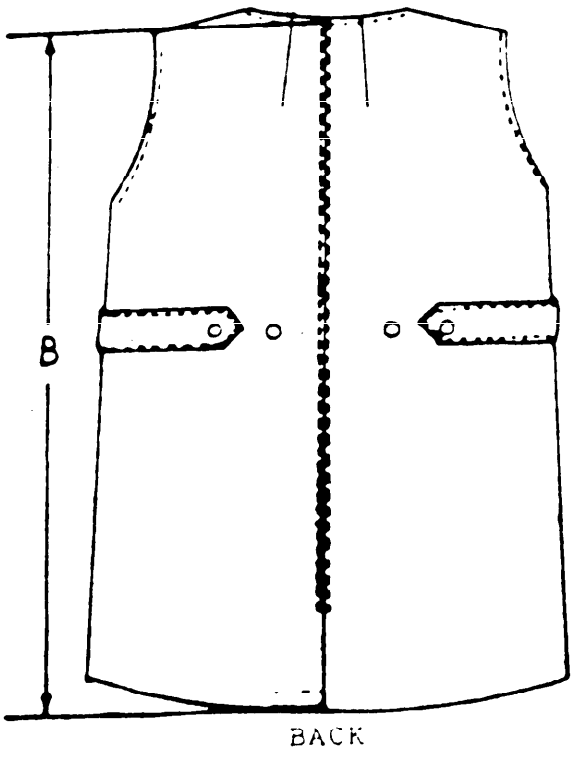


FIGURE 1. TUNIC, MATERNITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

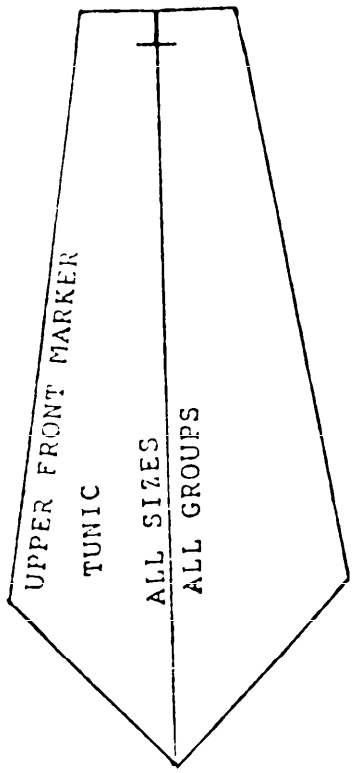


FIGURE 2. ORNAMENTAL STITCHING MARKER FOR FRONT PLEAT INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55221	2. DOCUMENT DATE (YYMMDD) 93-09-10

3. DOCUMENT TITLE
TUNIC, MATERNITY

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.