L-F-36c
September 11, 1963

SUPERSEDING
Int. Fed. Spec. L-F-0036b (Navy-Ships)
February 9, 1961 and
Fed. Spec. L-F-36a
October 9, 1953

FEDERAL SPECIFICATION

FACESHIELD, INDUSTRIAL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers industrial-type faceshields with transparent plastic windows for protection of the face from relatively light flying particles and from sprays of hazardous liquids.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity indicated by the title of the specification, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Styles and classes.* The faceshields furnished under this specification shall be of the following styles and classes as specified (see 6.2):

Style A.—Without crown protector.
Style B.—With crown protector.
Style C.—Attachment, safety helmet.

Class 1.—Full brim.
Class 2.—Cap.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal, shall apply:

American Standards Association Standard:

Z2.1—American Standards Safety Code for Head, Eye, and Respiratory Protection.

(Application for copies should be addressed to the American Standards Association, Inc., 70 East Forty-fifth Street, New York 17, New York.)

3. REQUIREMENTS

3.1 Faceshields. Faceshields furnished under this specification shall conform to the applicable requirements of ASA Z2.1, except as herein specified.

3.2 Design. The faceshields covered by this specification are designed to provide protection to the face (i.e., the front of the head including forehead, eyes, cheeks, nose, mouth, and chin) and neck, when required, from flying particles and sprays of hazardous liquids. Styles A and B faceshields shall be designed for comfort and are to be worn directly on the user's head. Style C shall be designed as an attachment for safety helmets.

3.3 Materials. Materials used in the manufacture of faceshields covered by this specification shall combine mechanical strength and lightness of weight, shall be nonirritating to the skin, and all parts except the windows shall have a low reflecting finish. Metal parts shall be corrosion resistant. Plastic parts shall be slow burning.

3.4 Style A faceshield without crown protector. Style A faceshields shall consist essentially of a headgear, including an adjustable headband and crown band; a durable tilting window support without crown protector; a clear plastic window, and a removable and replaceable sweatband. Style A faceshields shall be similar to figure 1 and shall comply with the test requirements specified in 4.5.

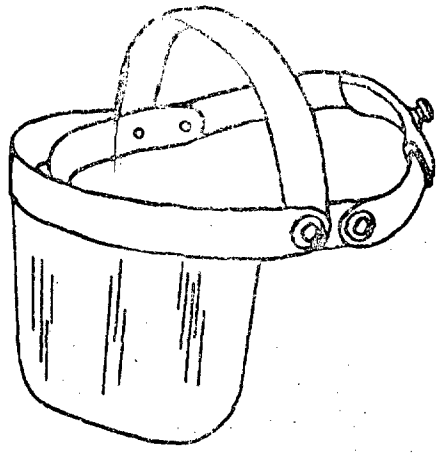


FIGURE 1.—Style A faceshield without crown protector.

3.4.1 *Headgear.* Style A faceshield headgear shall be fabricated of a good grade vulcanized fiber, acetate butyrate or equal material of at least 0.055 inch thickness. Headgear shall consist of a crown band of at least 1 inch in width, an adjustable headband and sweatband which shall conform to the applicable requirements of ASA Z2.1. Adjustable bands for style A faceshield headgear shall be of the positive locking type with a hat size range of a least 6-5/8 to 7-5/8 inches.

3.4.2 *Window support.* Style A faceshield window support shall be furnished without a crown protector. Window supports shall be made of vulcanized fiber, acetate butyrate or equal material at least 0.060 inch thick and designed for easy removal and replacement of windows. Support shall be provided with snap fastener studs or a combination of snap fastener studs with other suitable holder studs for attaching the window in a secure manner. Studs shall be equidistantly spaced to provide for maximum interchangeablilty. Support shall be attached to the headgear by friction joints which will per-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

mit tilting of the window either upward to be clear of the horizontal vision line or downward to a position of maximum protection with clearance for the nose, and over eyeglasses or goggles when used. The tension of the tilting mechanism shall be sufficient to hold the window in up or down position without slippage.

3.4.3 *Windows.* Unless otherwise specified (see 6.2), each faceshield shall be furnished with a clear plastic window conforming to table I for the window size specified. Windows shall be similar to figure 2 and shall comply with the test requirements of 4.5. Style A faceshields shall be furnished with size No. 3 windows.

TABLE I.—*Window.*

Size number	Dimensions (nominal ± 1)		Thickness
	Width	Length	
	Inches	Inches	(min.)
3	11-1/2	8	0.040
4	18	9	.040




FIGURE 2.—Window, clear plastic.

3.4.4 *Sweatbands.* Sweatbands shall be of nontoxic, nonirritating cushioning leather or imitation leather and shall be of the removable and replaceable type. Sweatbands shall cover no less than the forehead portion of the headband.

3.5 Style B faceshield with crown protector. Style B faceshields shall consist essentially of a headgear, window support with crown protector, window and a removable and replaceable sweatband. Style B faceshields shall be similar to figure 3, and shall conform to the test requirements of 4.5.

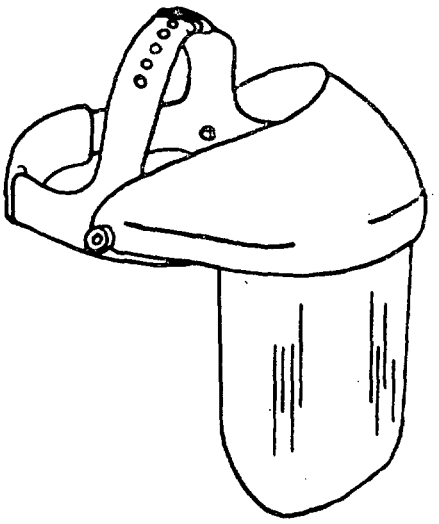


FIGURE 3.—Style B faceshield with crown protector.

3.5.1 *Headgear.* Style B faceshield headgear shall be of the adjustable positive-locking type and shall be similar to the requirements for style A headgear.

3.5.2 *Window support.* Style B faceshield window supports shall be furnished with a crown protector of at least 2-3/4 inches wide from the top of the window support at its maximum width. Crown protector shall be vulcanized fiber, acetate butyrate or equal material, at least 0.060 inches thick and shall be an integral part of the window support. Window support shall be provided with snap fastener studs or a combination of snap fastener studs with other suitable holder studs for attaching the window in a secure manner. Studs shall be equidistantly spaced to provide for maximum interchangeability. Tension joints and tilting mechanism shall conform to the applicable requirements for style A window supports.

3.5.3 *Window.* Unless otherwise specified (see 6.2), each style B faceshield shall be furnished with a clear plastic window conforming to table I, size No. 4. Windows shall be similar to figure 2 and shall comply with the test requirements of 4.5.

3.5.4 *Sweatbands.* Sweatbands for style B faceshield headgear shall comply with the requirements for style A sweatbands.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

3.6 Style C faceshields. Style C faceshields shall be of the tilting type designed for quick and easy attachment to, and removal from, safety helmets. Class 1 faceshields shall be designed for attaching to full-brim helmets and class 2 faceshields shall be suitable for attaching to the cap (brimless with visor) type helmet. Style C faceshields shall consist essentially of an attachment mechanism, an adjustable window support and a clear plastic window.

3.6.1 *Attachment mechanism.* The device or method of attachment of the style C faceshield assembly to the safety helmet shall provide a firm sure fit to insure protection and permit easy replacement. Metal or plastic frames shall be provided for holding the assembly to the helmet and supporting window. Snap-on attachments are permitted provided the assembly is supported by a strap or equal method which will hold the faceshield securely to helmet and not become accidently detached in use.

3.6.2 *Style C, class 1 faceshields.* Style C, class 1 faceshields shall be designed for attaching to safety helmets with a full brim similar to figure 4. Attachment mechanism shall include friction joints for holding the window and permit easy tilting upward so that bottom of window is above the helmet brim. Tension of the friction joints shall be such that the window can be held in the up or down position without slipping. Style C, class 1 faceshields shall be furnished without a crown protector, window size and thickness shall be not less than size No. 4 of table I. Style C, class 1 faceshields shall be similar to figure 4 and shall comply with the test requirements of 4.5.

3.6.3 *Style C, class 2 faceshields.* Style C, class 2 faceshields shall be designed for attaching to safety caps (brimless with visor) similar to figure 5. Class 2 faceshields shall include a crown protector at least 2-3/4 inches wide at maximum width. Crown protector shall be of vulcanized fiber, acetate butyrate or equal material at least 0.060 inches thick. Friction joints shall comply with the requirements for class 1. Window size and thickness shall conform to size No. 3 of table I. Unless otherwise specified (see 6.2), class 2 faceshields shall be similar to figure 5 and shall comply with the test requirements of 4.5.

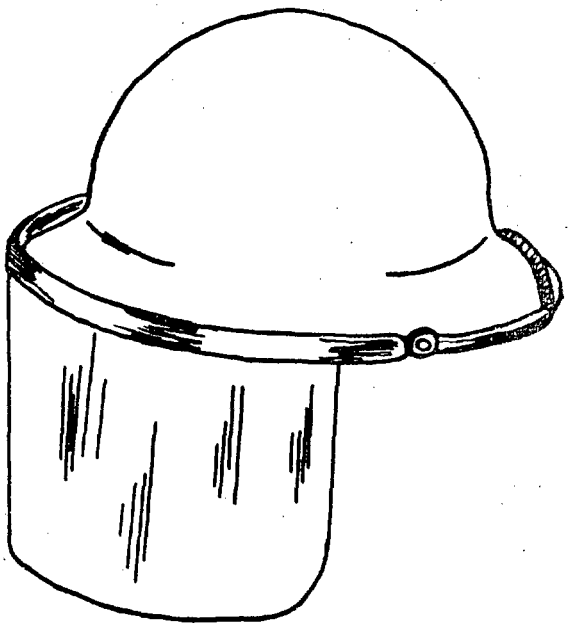


FIGURE 4.—Style C, class 1, faceshield attachment, safety helmet (full brim).

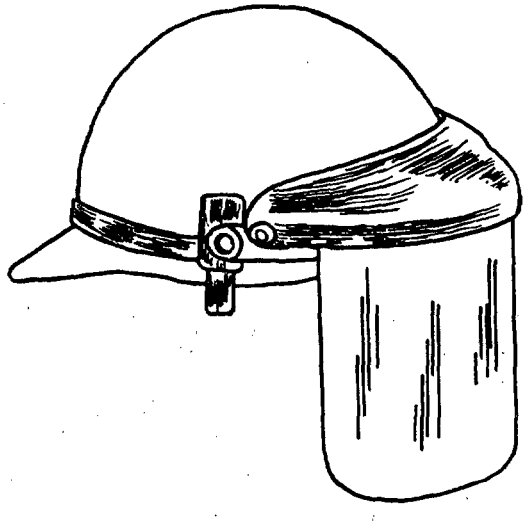


FIGURE 5.—Style C, class 2 faceshield attachment, safety helmet (cap).

3.7 Special windows and accessories. When special or additional windows are required such as wire mesh, fiber with win-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

dow, shaded green plastic, special sizes or thickness, they shall be as specified and shall be designed to fit the window support and shall be interchangeable with clear-plastic windows of the same manufacturer. When specified (see 6.2), special accessories such as chin protectors and wider crown protectors for style B and style C, class 2 shall be furnished.

3.8 **Interchangeability.** All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.9 **Marking.** Each headgear, plastic window, or attachment shall be permanently and legibly marked whereby the manufacturer may be readily identified. Plastic windows shall be also marked with their thickness in thousandths of an inch and colored windows for glare protection shall bear the shade number designation. Additional marking, when required, shall be as specified (see 6.2).

3.10 **Workmanship.** Workmanship shall be first class in respect, and all faceshields furnished shall be free from any defects which might affect appearance, functionability, or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Lot.** All faceshields of the same style, class, and size presented at one time shall be considered a lot for the purpose of inspection.

4.3 **Sampling for examination.** A random sample of shields shall be selected from each inspection lot in accordance with MIL-STD-105, at Inspection Level II. The Acceptable Quality Level shall be equal to 2.5 percent defective.

4.4 **Visual and dimensional examination.** Each of the sample shields selected in accordance with 4.3 shall be visually and dimensionally examined to verify compliance with this specification. Any shield in the sample containing one or more visual or dimensional defects shall not be offered for delivery and if the number of defective shields in any sample exceeds the acceptance number for that sample, this shall be cause for rejection of the lot represented by the sample.

4.5 **Tests.** Two faceshields shall be selected from each lot and tested for compliance with the test requirements set forth in the physical requirements and methods of test paragraph of ASA Z2.1. Style C, classes 1 and 2, shall be attached to the applicable helmet and tested in the same manner as styles A and B. Failure of either faceshield to meet the test requirements shall be cause for rejection of the entire lot.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 **Preservation and packaging.**

5.1.1 *Level C (preservation and packaging for domestic shipment).* Unless otherwise specified (see 6.2), preservation and packaging shall be in accordance with the manufacturer's commercial practice.

5.2 **Packing.**

5.2.1 *Level C (packing for domestic shipment).* Unless otherwise specified (see 6.2),

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

the equipment and accessories packaged as specified in 5.1 shall be packed in a manner which will insure acceptance and safe delivery at destination. Containers shall comply with the rules or regulations of carriers as applicable to the mode of transportation.

5.2.2 *Level B (for domestic shipment and storage)*. The faceshields packaged as specified in 5.1 shall be packed in snug-fitting, wood-cleated fiberboard, cleated plywood, nailed wood, or wire-bound boxes. The gross weight of wood boxes shall not exceed 200 pounds.

5.3 **Level A (preservation, packaging, and packing for overseas shipment)**. The faceshields, preserved and packaged in accordance with manufacturer's commercial practice for overseas shipment, shall be packed in snug-fitting wood-cleated fiberboard, wood-cleated plywood, nailed wood or wire-bound boxes. Containers shall be lined with a waterproof caseliner and sealed in accordance with manufacturer's practice. Shipping containers shall be closed and strapped. The gross weight of boxes shall not exceed 150 pounds, and fiberboard boxes shall not exceed 70 pounds.

5.4 **Shipping containers.** When practicable, each container shall contain an identical number of items and shall be of the same uniform size. In addition, all containers shall be new and shall be able to withstand storage, rehandling and reshipment without the necessity of repacking.

5.5 **Marking.**

5.5.1 *Military agencies.* In addition to any special marking required (see 6.2), unit packages, and exterior shipping containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be "Faceshield, Industrial".

5.5.2 *Civil agencies.* In addition to any special marking required by the contract or order, interior and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 **Intended use.** The faceshields covered by this specification can be used in woodworking operations against chips and sawdust, in metal machinery operations against flying particles, in buffing, polishing and grinding operations where particles may strike the face, spot welding, and the handling of hot or corrosive metals. Also by medical personnel in handling pathogenic viruses and chemicals. They are not acceptable for protection against heavy flying objects, welding, cutting operation, or intense radiant energy.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Style required (1.2.1).

(*c*) Special windows for style A, if required (3.4.3).

(*d*) Special windows for style B, if required (3.5.3).

(*e*) Special windows for style C, class 2, if required (3.6.3).

(*f*) Special windows or accessories required (3.7).

(*g*) Additional marking, if required (3.9).

(*h*) Level of preservation, packaging, and packing required (section 5).

(*i*) Marking, if different (5.5).

6.3 **Military use.** Items procured under this specification for military use are to be limited to the variety shown on the applicable military standards. Personnel of the military departments are requested to refer to these documents for guidance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—MU

Navy—Sh

Air Force—WRA

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.