L-S-281c

July 9, 1963

SUPERSEDING
Int. Fed. Spec. L-S-00281b
January 7, 1963 and
Fed. Spec. L-S-281
April 26, 1946

FEDERAL SPECIFICATION

SHIELDS, ERASING, TYPISTS'

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a plastic erasing shield primarily intended for use by typists in making erasures.

1.2 Classification.

1.2.1 *Type and grade.* The typists' erasing shields shall be of one type and one grade.

2. APPLICABLE SPECIFICATIONS, AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitations for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 — Boxes, Folding, Paperboard.

PPP-B-636 — Box, Fiberboard.

PPP-B-676 — Boxes, Set-up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The erasing shields shall be made of a transparent plastic conforming to all requirements of this specification. Cellulose-nitrate plastics or other highly flammable plastics shall not be used (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

3.2 **Design and size.** The openings shall be not less than the number indicated in figure 1. The design of the shields shall conform to the shape, size, and arrangement of openings shown in figure 1, except that additional openings may be of different shapes, sizes, and arrangements. The thickness shall be 0.015 inch ± 0.0015 inch. A tolerance of plus or minus 1/16 inch will be permitted in the overall length and the width.

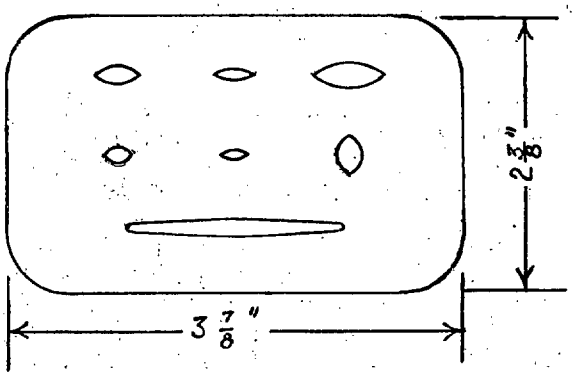


FIGURE 1.

3.3 **Flammability.** The shields shall be nonflammable, flame resistant, or slow burning, when tested in accordance with 4.4.1.

3.4 **Flexibility.** Shields shall resume their plane shape without assistance, and shall not crack or break, when tested as described in 4.4.2.

3.5 **Finish.** Shields shall be finished smoothly on both sides. All shields shall be free from burrs and rough edges.

3.6 **Workmanship.** Shields shall be free from any defects which affect appearance or which might impair serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Supplier's responsibility.** Unless otherwise specified (see 6.2), the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling.**

4.2.1 *Size of lot.* All shields presented for delivery at one time shall be considered a lot for inspection and acceptance.

4.2.2 *Sampling for visual examination of shields.* Not more than 3 shields shall be taken, at random, from each envelope containing 1 dozen shields. The sample unit shall be one shield. The sample size shall be in accordance with Inspection Level 1 of MIL-STD-105, with an Acceptable Quality Level (AQL) of 2.5 percent defective.

4.2.3 *Sampling for tests.*

4.2.3.1 *Material.* When specified, samples of plastic shall be furnished in order to determine compliance with the applicable material requirements of this specification (see 3.1), when tested in accordance with 4.4.1. This specification shall apply in all other respects. When specified, the manufacturers shall furnish a certificate that the material submitted for test is made from the same material under the same or equivalent conditions as those used in the manufacture of the product.

4.2.3.1.1 *Size of plastic.* The plastic sample shall be not less than 18 inches in length and 15 inches in width.

4.2.3.2 *End item.* Random sample shields contained in each box or envelope shall be taken from each lot in accordance with MIL-STD-105, Inspection Level L-3 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one shield.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

4.3 **Examination.**

4.3.1 *Visual examination of shields.* Samples taken as specified in 4.2.2 shall be visually examined in accordance with the list of defects in table I. Any shield in the sample containing one or more visual or dimensional defects shall be rejected. If the number of defective shields in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

TABLE I.—*List of defects*

Visual examination	Defects
Material not as specified	X
Plastic not transparent	X
Openings and design not as per drawing	X
Dimensions not within tolerance	X
Finish not smooth	X
Edges not straight (burrs, indentations, etc.)	X
Shields damaged (broken, cracked, chipped)	X
Marking of envelopes and intermediate containers inadequate (wrong place, wrong size, not complete, illegible)	X

4.4 **Tests.**

4.4.1 *Test for material.* Samples obtained in accordance with 4.2.3.1 shall be subjected to the following test. Failure to pass the test for material shall be considered cause for rejection of the lot, as not meeting the material requirement of this specification.

4.4.1.1 *Flammability test.* A draft shield shall be used to reduce air current effects. Hold the sample vertically, within the shield, above a bunsen burner having a 1-inch to 1-1/4 inch blue flame. Just touch the end of the specimen until the specimen ignites, or for a period of not over 30 seconds. Remove the flame. If the specimen will not support combustion, it is nonflammable. If the specimen burns when in contact with the flame but will not continue to burn when the flame is removed, it is flame resistant. If the specimen continues to burn at a rate of less than 1.5 square inches per second, it is slow burning. If the specimen bursts into flame immediately, it shall be considered as not meeting the requirements of this specification.

4.4.2 *Test for end item.* Samples selected in accordance with 4.2.3.2, shall be subjected to the following test. Any shield in the sample failing the test shall be considered a defective shield. If the number of defective shields exceeds the acceptance number for the sample, the lot represented by the sample shall be rejected.

4.4.2.1 *Flexibility test.* The sample shall be bent lengthwise around a cylinder 2 inches in diameter, and shall be held in that position for 1 minute. Release and examine for compliance with 3.4.

5. PREPARATION FOR DELIVERY

Definitions and applications of the various levels of packaging and packing specified hereinafter, shall be in accordance with Fed. Std. No. 102, for civil agencies only.

5.1 **Packaging.** Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A.* Twelve shields shall be packaged in an open end, center seam, light colored sulphite envelope. The envelope shall have a basis weight of 20 (17 x 22—500 sheets) and a bursting strength of 36 p.s.i.

5.1.2 *Level B.* Twelve shields shall be packaged in an open end kraft envelope or in glassine envelopes in accordance with standard commercial practice.

5.1.3 *Level C.* The shields shall be packaged in accordance with the supplier's standard practice.

5.1.4 *Intermediate packaging.* Twelve unit packages shall be intermediate packaged in boxes conforming to PPP-B-566, style II, or PPP-B-676. The boxes shall be closed and sealed in accordance with the applicable specification or appendix thereto.

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

5.2.1 *Level A.* The shields shall be packed in boxes conforming to PPP-B-636, class 2, V3c, RSC. The boxes shall be waterproof, sealed with tape, and reinforced with bands of reinforcing tape in accordance with the appendix to the box specification.

5.2.2 *Level B.* Unless otherwise specified (see 6.2) 14 intermediate containers of shields shall be packed in a box conforming to PPP-B-636, class 1, type 1. The box shall be sealed and closed in accordance with the appendix to the box specification.

5.2.3 *Level C.* The shields shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special markings required by the contract or order, the interior, intermediate, and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military activities.* In addition to any special markings required by the contract or order, the interior, intermediate, and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Intended use.** This item is a plastic erasing shield, for use with typewriters in making erasures. This item is not to be confused with Shields, Erasing, Draftsmen's, which is made of metal and is used in drafting work.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Inspection responsibility (for civil agencies only) if other than as specified herein; and administrative provisions for inspection of records, when applicable (4.1).

(*c*) Level of packaging and packing required (5.1 and 5.2).

(*d*) Quantity required for level B packing (5.2.2).

6.2.1 *Standard pack (civil agencies).* The standard pack requirements, including marking in 5.1.2 (level B), 5.2.2 (level B), and 5.3.1 are intended for use in procurement of Stores Stock replenishments. Procuring officers should use the standard pack provisions when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot, or intermediate storage point for temporary storage, subsequent issue, and/or shipment to eventual user.

6.3 It is believed that this specification adequately describes the characteristics necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.4 **Transportation description.** Transportation description and minimum weight applicable to this commodity are:

Rail:

Stationery, not otherwise indexed by name.

Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.

Motor:

Stationery, not otherwise indexed.
Truckload minimum weight 20,000 pounds, subject to Rule 115, National Motor Freight Classification.

6.5 Federal specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:09Z
Check the source to verify that this is the current version before use.