NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-27/336C
17 January 1986
SUPERSEDING
MIL-T-27/336B
16 January 1985


PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, POWER, 120 VOLTAMPERES, 400 HZ, TF5S03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

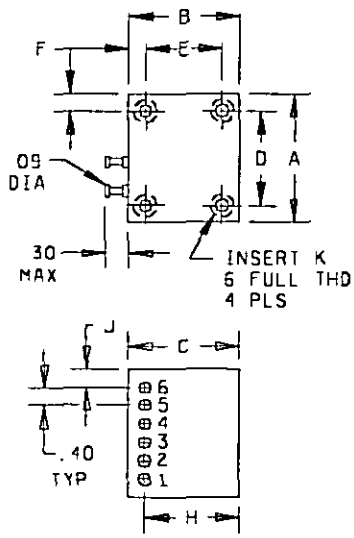

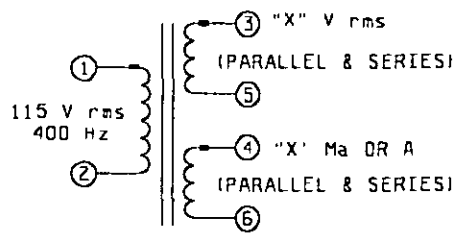

(SEE TABLE I FOR VALUE OF "X")
CIRCUIT DIAGRAM

	INCHES	mm
A	2.43 ±.02	(50.8) ±(.5)
B	2.00 ±.02	(41.1) ±(.5)
C	2.10 ±.02	(46.0) ±(.5)
D	1.93 ±.02	(38.1) ±(.5)
E	1.50 ±.02	(28.4) ±(.5)
F	.25 ±.04	(6.4) ±(1.0)
H	1.90 ±.04	(38.1) ±(1.0)
J	.21 ±.04	(42.9) ±(1.0)
K	.138-32 UNC 2B	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the top and sides of case.
4. Dimensional tolerance shall be ±.02 unless otherwise specified.
5. For series output connect terminals 4 and 5 together. For parallel output connect pins 3 to 4 and 5 to 6.

INCHES	MM
.02	0.5
.09	1.3
.30	7.6
.40	10.2

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e , (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings

Primary voltage (1-2) 115 volts rms, 400 ±20 hertz.

Secondary voltage and current (3-6) See table I.

Voltampere 120 voltamperes.

Working voltage (1-2): 535 volts peak

Design and construction

Dimensions and configuration See figure 1.

Duty cycle Continuous.

Case Encapsulated.

Material Epoxy fiberglass.

Terminals Turret type.

Height .300 inch, maximum

Weight. 1.6 pounds, maximum.

Operating temperature range -55°C to +130°C.

Altitude 70,000 feet.

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (each winding, secondary windings connected in series):

At sea level 1500 volts rms.

At reduced barometric pressure 1.25 times the peak working voltage specified.

Electrical characteristics

Rated load: With 115 volts rms and 400 Hz in (1-2), and rated current in secondary, the voltage across (3-6) shall be as specified in table I, ±5 percent.

Efficiency 90 percent minimum at rated load.

Temperature rise: 45°C with 115 volts rms, 400 hertz across (1-2) at an ambient temperature of 85°C, full load terminals (3-6).

Regulation: $\frac{\text{Voltage (no load)} - \text{Voltage (rated load)}}{\text{Voltage (rated load)}} \times 100$

Shall not exceed 10 percent

Polarity Additive, with terminals 2 and 3, and 5 and 4 connected.

Marking location See figure 1.

Part number 127/336- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Dash number M27/336	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)	
	Series (CT)	Parallel	Series	Parallel
-01	10	5	12.0	24.0
-02	12.6	6.3	9.50	19.0
-03	16	8	7.50	15.0
-04	20	10	6.0	12.0
-05	24	12	5.0	10.0
-06	34	17	3.53	7.06
-07	40	20	3.0	6.0
-08	56	28	2.14	4.28
- 09	88	44	1.35	2.72
-10	120	60	1.0	2.0

QUALITY ASSURANCE PROVISIONS:

Extent of Qualification.

Qualification testing and approval to M27/332-10 and M27/337-10 shall be sufficient to grant qualification approval to MIL-T-27/332 through MIL-T-27/337 inclusive, all parts.

Qualification testing and approval to M27/336-10 shall be sufficient to grant qualification approval to M27/336-01 through M27/336-10.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0658-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:15Z
Check the source to verify that this is the current version before use.