
MIL-T-27/325C
8 April 1992
SUPERSEDING
MIL-T-27/325B
12 June 1990


MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, TF5S03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

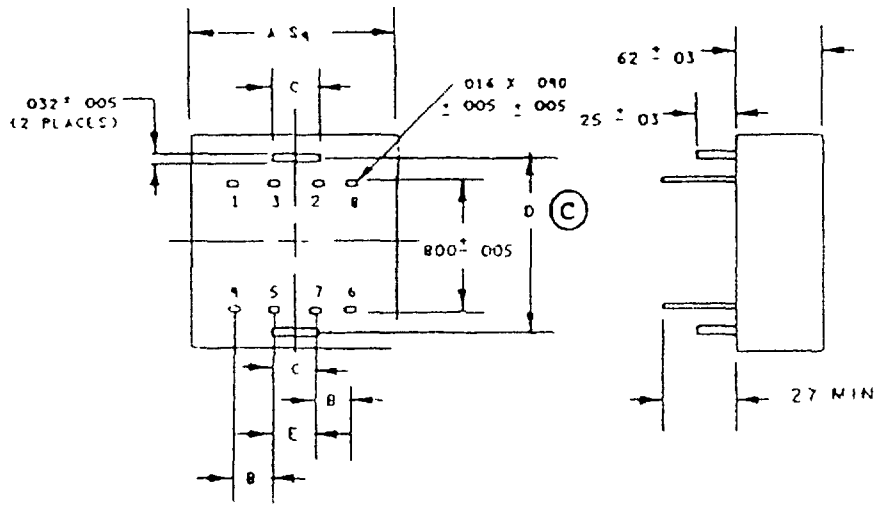

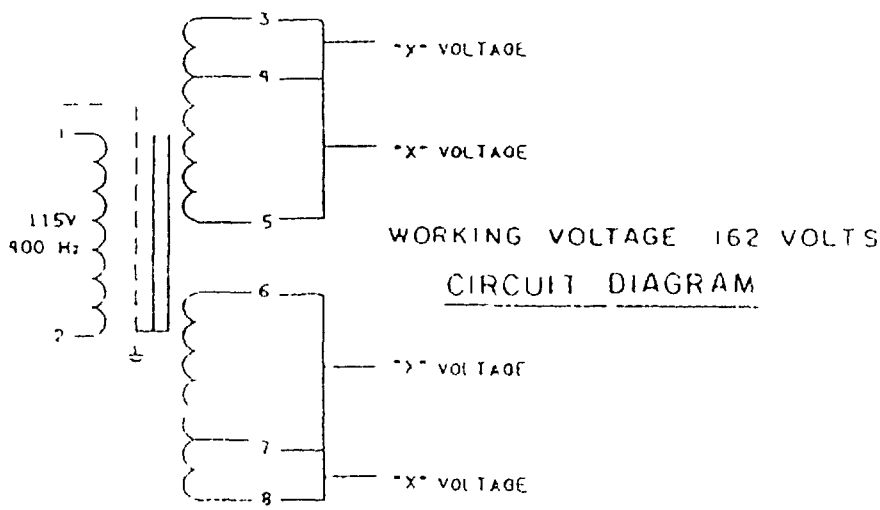

WORKING VOLTAGE 162 VOLTS

CIRCUIT DIAGRAM

FIGURE 1 Dimensions and configurations

© denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:11Z
Check the source to verify that this is the current version before use.

Dash number	A ± 03	E ± 005	B ± 005	C ± 02	D ± 01	Weight (grams)
01	1 24 sq	300	200	38	1 128	56 7
02	"	"	"	"	"	"
03	"	"	"	"	"	"
04	1 75 sq	350	400	"	1 625	114
05	"	"	"	"	"	"
06	"	"	"	"	"	"
07	2 25 sq	400	600	50	2 132	172
08	"	"	"	"	"	"
09	"	"	"	"	"	"

Inches	mm	Inches	mm
005	0 13	38	9 7
01	0 3	400	10 16
016	0 41	50	12 7
02	0 5	600	15 24
03	0 8	62	15 8
032	0 81	800	20 32
040	1 02	1 128	28 65
200	5 08	1 24	31 5
25	6 4	1 625	41 28
27	6 86	1 75	44 45
300	7 62	2 132	54 15
350	8 89	2 25	57 15

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Marking shall be on top of the case
4. Secondary electrical values shall be marked as specified in table I as applicable

FIGURE 1 Dimensions and configurations Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses i e (1-2) are used, they indicate the winding and the extreme terminals of the winding)

Electrical ratings

Primary voltage (1-2) 115 volts ±10 percent, 400 Hz ±5 percent

Secondary voltage(s) See table I

Secondary current(s) See table I

Working voltage 162 volts, maximum

Design and construction

Dimensions and configurations See figure 1

Case Encapsulated

Material Epoxy

Weight See figure 1

Duty cycle Continuous

Altitude 10,000 feet, maximum

Operating temperature range -55°C to +130°C

Terminals Printed circuit pins, solderable

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level) 500 volts, rms

Electrical characteristics

No load With 115 volts and 400 Hz across (1-2), current in (1-2) shall not exceed 150 mA rms

Rated load With 115 volts and 400 Hz across (1-2), and a resistive load with current as specified in table I in (3-5) and (6-8), secondary voltages shall be as specified in table I

$$\text{Regulation} \quad \frac{\text{Voltage (no load)} - \text{Voltage (rated load)}}{\text{Voltage (rated load)}} \times 100$$

shall not exceed 12 percent

Polarity Additive, with terminals 2 and 3 connected and terminals 5 and 6 connected

Electrostatic shielding (voltage ratio) 10 1 at 10 kHz

Temperature rise 45°C maximum with 115 V rms, 400 Hz across (1-2) with secondaries loaded at an ambient temperature of +85°C

Vibration MIL-STD-202, method 204, test condition D

Part or Identifying Number (PIN) M27/325-(dash number from table I and figure 1)

QUALITY ASSURANCE PROVISIONS

Extent of qualification

Qualification testing and approval to M27/325-0c shall be sufficient to grant qualification approval to M27/325-01 through M27/325-09

Source: https://assist.dla.mil -- Downloaded: 202640-16T04:11Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings

Dash number	Secondary voltages V rms ±5%						Secondary currents amps, rms		Volt ampere rating
	(3-4)	(4-5)	(3-5)	(6-7)	(7-8)	(6-8)	(3-5)	(6-8)	
01	2	3	5	3	2	5	1 0	1 0	10
02	4	6	10	6	4	10	0 5	0 5	10
03	6	9	15	9	6	15	0 33	0 33	10
04	2	3	5	3	2	5	2 0	2 0	20
05	4	6	10	6	4	10	1 0	1 0	20
06	6	9	15	9	6	15	0 66	0 66	20
07	2	3	5	3	2	5	3 0	3 0	30
08	4	6	10	6	4	10	1 5	1 5	30
09	6	9	15	9	6	15	1 0	1 0	30

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities
Army - ER
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0794)

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:11Z
Check the source to verify that this is the current version before use.