INCH-POUND

MIL-L-25370E(USAF)
12 JULY 1994

SUPERSEDING
MIL-L-25370D
4 October 1966

MILITARY SPECIFICATION

VALVE. PNEUMATIC INFLATOR. (LIFE PRESERVER - MA- 1)

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of Pneumatic Inflator Valve (life preserver) designated MA-1

2. APPLICABLE DOCUMENTS

2.1 Government Documents

2.1.1 Specifications. standards. and handbooks. The following specifications. standards, and handbooks form a port of this document to the extent specified herein. Unless otherwise specified. the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto. cited in the solicitation, (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-1898	Cushioning Material. Cellulosic Packaging
V-T-295	Thread. Nylon
PPP-B-566	Boxes. Wood-Cleated Panelboard
PPP-B-576	Box. Wood. Cleated Veneer. Paper Overlaid
PPP-B-585	Boxes. Wood. Wirebound
PPP-B-591	Boxes. Fiberboard, Wood-Cleated
PPP-B-636	Box. Shipping. Fiberboard
PPP-B-640	Box. Fiberboard. Corrugated. Triple-Wail
PPP-B-676	Boxes. Setup
PPP-T-60	Tape. Packaging. Waterproof

Beneficial comments (recommendations. additions. deletions) and any pertinent data which may be of use in improving this docment should be addressed to: Technology & Industrial Services Division. SA-ALC/TILDD. 485 Quentin Roosevelt Rd. Kelly AFB. TX 78241-6452, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

AMSC N/A FSC 4220

DISTRIBUTION STATEMENT A: Approved for public release. distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation Methods of
MIL-C-25369	Cylinders. Carbon Dioxide. for the Inflation of Pneumatic Life Preservers

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-889	Dissimilar Metals
MIL-STD-965	Parts Control Program
MIL-STD-970	Specifications and Standards. Order of Precedence for the Selection of
MIL-STD-1556	Government/Industry Data Exchange Program (GIDEP) Contractor Participation Requirements

(Unless otherwise indicated, copies of federal and military specifications.standards. and handbooks are available from the Defense Printing Service Detachemnt Office Bld 4d. Section d. 700 Robbins Avenue. Philadelphia. PA 19111-5094

2.1.2 Other Goverment documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

Air Force

52A6598	Stem - Inflator Valve, Life Preserver Bladder
52A6600	Cap - Inflator Valve. Pneumatic Life Preserver
6K3881	Life Preserver - Underarm, Casualty, Type MB-1. Assembly of
58K3567	Gasket - Life reserve Inflator Inlet
58A3568	Gasket - Life Preserver Inflator Stem. Upper
58A3569	Gasket - Life Preserver Inflator Stem, Lower

(Copies of the drawings required by supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-B 117	Standard Test Method of Salt Spray (FOG) Testing

(Application for copies should be addressed to the American Society For Testing and Materials. 1916 Race Street, Philadelphia, Pa. 19103- 1187.)

2.3 Order of precedence. In the evebt of a conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First Article. When specified (see 6.3), a sample shall be subjected to first article inspection (see 6.4) accordance with (4.4).

Source: https://assist.dla.mil -- Downloaded: 202610-20T04:34Z
Check the source to verify that this is the currentversion before use.

3.2 Design

3.2.1 Selection or specifications and standards Specifications and standards, neccessary commodities and services not specified herein shall be selected in accordance with MIL-STD-970.

3.2.1.1 Parts Control. The contractor shall participate in Government Industry Data Exchange Program (GIDEP) in accordance with MIL-STD-1556. In the design of the inflating assembly, the contractor shall ensure the components selected have not been identified as a problem or unresolved deficiency by GIDEP. The contractor shall submit an Alert/Safe-Alert, on a DD Form 1939, whenever an actual or potential problem is evident with respect to a part, component, material, test equipment, process or safety condition. The contractor shall certify maximum usc of off-the-shelf items in accordance with MIL-STD-965.

3.3 Components The inflating assembly shall consist of

Item No.	Quantity	Item Name
1	1	Inflating Assembly Housing (see 3.5.1)
2	1	Lanyard (see 3.5.2.)
3	3	Gaskets (see 3.5.3)
4	1	Valve Stem Cap (see 3.5.4)

3.4 Materials

3.4.1 Recycled, reclaimed, and virgin materials. The Government policy is to acquire items composed the highest percentage of recovered materials practicable, consist with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing supplier's employees to undue hazards from the recovered materials.

3.4.2 Age. Unless otherwise specifically approved by the procuring activity, all materials and component parts used in the inflating assembly shall have been manufactured not more than 12 months prior to the date of delivery to the Government.

3.4.3 Metals. Metals shall be of the corrosion-resistant type suitably treated to resist corrosion due to salt spray or any other atmospheric conditions likely to be met in storage or normal service.

3.4.3.1 Dissimilar metals unless suitably protected against electrolytic corrosion, shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.5 Design and contruction. The dimensions and the shape of the inflating assembly shall conform to Figure 1.

3.5.1 Inflating assembly housing. The inflating assembly housing shall be high pressure die-cast aluminum and shall be anodized and treated with dichromate seal. The discharge mechanism shall consist of an external lever and an internal piercing pin and shall have a seal that will prevent leakage of life preserver cell pressure with the lever in any position The inlet of the inflating assembly shall be threaded to accept a carbon-dioxide cylinder conforming to MIL-C-25369. A lock shall be provided to retain the carbon-dioxide cylinder in the inlet. An outlet shall be provided to mount the inflating assembly on a life preserver cell. Passages shall be provided for conducting gas from the punctured carbon-dioxide cylinder to the outlet when the lever is actuated

3.5.1.1 Piercing pin. The piercing pin shall be cadmium-plated, hardened steel, having a case depth of 0.010 inch. A spring shall be provided to retract the pin immediately from the opening of a punctured cylinder.

3.5.1.2 Lever. The liner shall be one-eighth inch thick: cadmium plated. hardened steel, having a case depth of 0.010 inch The lever shall be in position with the staked stainless steel pin. in the unoperated position the lever shall lay against the side of the inflating assembly as shown in Figure 1. Thread conforming to Type III. Letter Size E, color optional of V-T-295 shall be used for securing the lever in the unoperated position. All edges of the lever shall have a nominal radius or ten-thousandths of an inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

3.5.1.3 Outlet. Each inflating assembly shall have an outlet for mounting on a valve stem conforming to Drawing 52A6598 as shown in Figure 2. The gas passages in the outlet shall align with the hole in the side of the stem regardless of which side of the outlet is toward the base of the stem.

3.5.1.4 Lock. Each inflating assembly shall hae a screw-type lock to prevent loosening of an installed carbon-dioxide cylinder conforming to MIL-C-25369. The screw head shall be a slot-type and shall not extend above the inflating assembly when adjusted to tighten the carbon-dioxide cylinder. The screw head and the slot shall be rounded and free from burrs. The top of the tapped holes shall be countersunk smooth and free of burrs or sharp edges

3.5.2 Lanyard. A lanyard conforming to Drawing 56K3881 shall be attached to the lever.

3.5.3 Gaskets. Gaskets shall be provided to seal the attachment points of the outlet and the inlet of the inflating assembly. The inlet gasket shall conform to Drawing 58A3567. The outlet gasket shall conform ato Drawing 58A3568 and 58A3569.

3.5.4 Valve stem cap. A valve stem cap conforming to Drawing 52A6600 shall be provided to hold the inflating assembly in pl,ace on the valve stem.

3.6 Performance

3.6.1 Operation test without cylinder. A load of not more than 20 pounds attached to the end of the lever arm of the inflating assembly shall operate the piercing mechanism.

3.6.2 Lever operation. The lever shall be designed so that an installed cylinder conforming to MIL-C-25369 will be punctured and the piercing pin retracted to its original position with a travel of the lever through an arc of not more than 90 degrees in line with the longitudinal axis of the inflating assembly.

3.6.3 Piercing pin operation. The point of the pin shall be positioned not less than one thirty second inch behind the surface of the inflating assembly gasket, (Drawing 58A3567).

3.6.4 Hydrostatic pressure. The inflating assembly shall satisfactorily withstand a hydrostatic pressure of 1.500 pounds per square inch (psi) without deformation or leakage.

3.6.5 Salt spray. After subjection to the salt-spray test and with a load of 20 pounds on the lever arm. the inflating assembly shall pierce and discharge a cylinder conforming to MIL-C-25369 in not more than two and one half seconds.

3.6.6 Leakage With the lever moved slowly through a normal cycle of operation while the inflating assembly is submerged to internal pressure of 2 psi and 40 psi (in this order) for not less than 10 seconds each. the inflating assembly shall not leak at any point.

3.6.7 Operation test with cylinder. With a load of 20 pounds on the lever arm. the inflating assembly shall pierce and discharge a cylinder conforming to MIL-C-25369 in not more than two and one half seconds.

3.6.8 Lock. The lock shall be such that a cylinder installed with a torque of 60-inch pounds can be loosened with a torque of not less than 30 nor more than 60-inch pounds.

3.7 Identification of product. The inflating assembly shall be marked for identification in accordance with the following specific information as defined in MIL-STD-130:

VALVE. PNEUMATIC INFLATOR (LIFE PRESERVER MA- 1)

Manufacturer's Identification
Contract or Order No
Date of Manufacture

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

3.8 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. Tlhe item identification and part number requirements of MIL-STD-130 shall govern the manufacturer's part number and changes thereto.

3.9 Workmanship. The inflating assembly, including all parts and equipment, shall be constructed and finished in a thoroughly workmanship manner. Workmanship shall be of the highest quality to insure proper functioning of the inflating assembly at all times.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order. the contractor is responsible for (he performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order. the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein. unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification u'here such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection. as part of manufacturing operations. is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either by indicated or actual. nor does it commit the Government to accept defective material.

4.2 Classification of tests. The inspection and testing of the inflating assembly shall be classified as follows:

a. Preproduction test or First article (see 4.4).
b. Acceptance tests (see 4.5)

4.3 Test conditions.

4.3.1 Atmospheric conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury, a temperature of 70 (plus of minus 18) degrees Fahrenheit. and a relative humidity of 80 percent or less. If tests are concluded with an atmospheric pressure or temperature different from the starting values, corrections shall be made for the changes in value.

4.3.2 Installed cylinders. The cylinders shall be installed with a torque of 60 (plus 10, minus 0) inch-pounds Discharged cylinders shall be installed in inflating assembles tested for leakage and hydro-static pressure

4.4 First article testing

4.4.1 First article test sample. The first article test sample shall consist of two inflating assemblies representative of the production equipment. The samples shall be identified with the manufacturer's part number and any other information required by the procuring activity (see 6.2). The sample shall be subjected to the preproduction test specified in 4.4.3.

4.4.2 Test data. Test data shall be in accordance with the instruction of the procuring activity (see 6.2)

4.4.3 Preproduction tests. Preproduction tests shall consist of all tests described under 4.6

4.5. Acceptance tests. Acceptance tests shall consist of.

a. Individual tests
b. Sampling tests

Source: https://assist.dla.mil -- Downloaded: 202610-20T04:34Z
Check the source to verify that this is the current version before use.

4.5.1 Individual test. Individual tests shall consists of the following tests as described under 4.6.

a. Examination of products
b. Operation test without cylinder
c. Lever operation
d. Piercing pin operation

4.5.2 Sampling tests.

4.5.2.1 Lot. A lot shall consist of inflating assemblies manufactured under essentially the same conditions and submitted for inspection at substantially the same time. A lot shall not exceed 500 inflating assemblies for sampling plans A and B and shall be in accordance with inspection level S-3 of MIL-STD-105 for sampling plan C

4.5.2.2 Sampling plan A. One inflating assembly shall be selected at random from the first lot, and from each fourth lot thereafter, and shall be subjected to the following tests as described under 4.6

a. Hydrostatic pressure
b. Salt spray

4.5.2.3 Sampling plan B. Ten inflating assemblies shall be selected at random from each lot of inflating assemblies and shall be subjected to the folowing tests as described under 4.6:

a. Leakage
b. Operation test with cylinder
c. Lock

4.5.2.4 Sampling plan C. Upon completion of the individual tests specified in 4.5.1. random samples shall be selected from each lot in accordance with inspection level S-3 of MIL-STD-105. The sample size shall be based only on the applicable size code letter corresponding to the inspection level S-3. Each inflating assembly selected as a sample unit shall be forwarded to an inspection activity selected by the procuring activity (see 6.2) for the following tests as described under 4.6:

a Examination of product
b. Operation test without cylinder
c. Lever operation
d. Piercing pin operation

4.5.2.5 Rejection and retest (plans A and B only). When one or more inflating assemblies from a lot selected in accordance with plan A or B fail to meet the specification, acceptance of ail inflating assemblies in the lot shall be withheld until the extent and cause of failure have been determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the Sampling tests shall be repeated.

4.5.2.6 Rejection (plan C only). Rejection and acceptance for plan C shall be as follows: The acceptance number shall be zero, and the rejection number shall be one for each test. The lot, from which the inflating assembly samples were selected: shall not be shipped until the samples (see 6.3) have been approved by the procuring activity and the lot has been accepted by the cognizant quality control representative. The lot from which the inflating assembly samples were selected shall be rejected if any sample fails to meet any requirement of the tests specified in sampling plan C A rejected lot shall not be resubmitted except with the approval of the procuring activity.

4.5.2.7 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. However, final acceptance of the entire lot or lots produced later shall not be made until it is determined that all inflating assemblies meet all the requirements of the specification.

4.5.3 Defects in inflating assemblies already accepted. The investigation of a test failure could indicate

Source: https://assist.dla.mil -- Downloaded: 202640-20T04:34Z
Check the source to verify that this is the current version before use.

that defects may exist in inflating assemblies already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them. If further inspection should disclose defects which would render the item unusable or unsafe., the supplier will be responsible for recalling those lots identified as containing unsafe items or if field repairable, will provide materials and labor as necessary to correct the identified deficiencies.

4.6 Test methods

4.6.1 Examination of product. Each inflating assembly shall be visually examined to determine compliance with the requirements of this specification with respect to workmanship, materials, marking. and construction. Each inflating assembly shall be checked to determine if the inlet is threaded to the required depth.

4.6.2 operation test without cylinder. The inflating assembly shall be held in an inverted position with a 20-pound load attached to the end of the lever arm and with the lever arm held in the normal position. The lever arm shall be released. and the load shall operate the piercing mechanism. The safety thread shall not be used to secure the lever arm during this test. Failure of the inflating assembly to operate the piercing mechanism shall be cause for rejection

4.6.3 Lever operation. The lever arm of each inflating assembly shall be operated through an arc of not more than 90 degrees. Failure of the piercing pin to pierce the installed cylinder and then to retract to its original Position with a travel of the lever through an arc of not more than 90 degrees in line with the longitudinal axis of the inflating assembly shall be cause for rejection.

4.6.4 Piercing pin operation. A gage comparable to figure 3 shall be inserted in each inflating assembly to determine if the piercing pin is at least one thirty second inch behind the surface of the inflating assembly gasket (Drawing 58A3567). The lever shall be operated through an arc of 90 degrees: the piercing pin shall travel not less than three thirty second inch beyond the gasket. Surface “X” shall not extend beyond surface “Y” in the unoperated position.

4.6.5 Hydrostatic pressure. A discharged carbon dioxide cylinder shall be installed for this test. A hydrostatic pressure of 1 1500 psi shall be applied to the outlet of the inflating assembly for a period of not less than 5 minutes. The lever shall be in the operated position. Any deformation or leakage of the inflating assembly shall be cause for rejection. After completion of this test, the inflating assembly shall be subjected to the tests specified in 4.6.6.

4.6.6 Salt spray. The inflating assembly shall be subjected to a 96-hour salt spray test in accordance with test method ASTM B 117. After the salt-spray test there shall be no corrosion of the base metals After the compaction of the salt-spray test, the inflating assembly (with a cylinder conforming to MIL-C-25369 installed) shall be held in an inverted position with a 20-pound load attached to the end of the lever arm and with the lever arm held in the normal position. When the lever arm is released. the load shall operate the piercing mechanism which will pierce and discharge the cylinder in not more than two and one-half seconds. The safety thread shall not be used to secure the lever during this test. Failure of the inflating assembly to puncture the cylinder with a force of 20 pounds in cylinder with a force of 20 pounds in two and one-half seconds shall be cause for rejection.

4.6.7 Leakage. With the inflating assembly mounted on a valve stem conforming to Drawing 52A6598 with the gaskets and the valve stem cap in place, the lever shall be moved slowly through a normal cycle of operation while the inflating assembly is submerged in water and is subjected to internal pressure of 2 psi for not less than 10 seconds. This test shall be repeated except that the internal pressure applied shall be 40 psi. Any evidence of leakage of the inflating assembly shall be cause for rejection.

4.6.8 Operation tests with cylinder. The inflating assembly shall be mounted on a valve stem conforming to Drawing 52A6598 with gaskets and valvc stem cap in place. A cylinder conforming to MIL-C-25369 shall be installed. The inflating assembly shall be held in an inverted position with a load attached to the end of the lever arm and the lever arm held in the normal position, The outlet shall be equipped with a chamber that will provide between 1.5 and 2.5 psi back pressure on the inflating assembly. The inflating assembly and load shall be submerged in water. The load shall be such that a force of 20 pounds is applied to the lever arm. When the lever arm is released, the load shall operate the piercing mechanism which shall pierce and discharge the cylinder in not

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

more than two and one half seconds. The safety thread shall not be used to secure the lever in this test. During and not less than 10 seconds after the lever arm is release, no bubbles shall be visisble.

4.6.9 Lock. The lock on a cylinder conforming to MIL-C-25369 installed with a torque of 60 inch-pounds shall be tested by applying a torque, in a counterclockwise directin, to loosen the installed cylinder. Failure of the cylinder to be released with a torque of not less than 30 nor more than 60 inch-pounds shall be cause for rejection of the inflating assembly.

5. Packaging

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2)

5.1.1 Level A. Preservation and packaging for level A shall be in accordance with method III of MIL-P-116. The quantity per unit package shall be one. The inflating assembly shall be packaged in unit containers that conform to PPP-B-566 or PPP-B-676 and that are of minimum size consistent with the protection required Cushioning material conforming to A-A-1898 shall be applied to the item as necessary to prevent free movement of the item within the unit container.

5.1.2 Level C. Preservation and packaging for level C shall be the minimum necessary to afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Inflating assemblies shall be packed in overseas-type containers conforming to PPP-B-576, PPP-B-585, PPP-B-591, PPP-B-636, or PPP-B-640. Containers shall be of minimum weight and cube. uniform size and shape. and when practical. shall contain like quantities The gross weight of the containers shall be governed by the applicable container specification. Closure of the containers shall be in accordance with the applicable specification and appendix thereto. When containers conforming to PPP-B-636 are used, all joints and scams shall be sealed with tape conforming to PPP-T-60.

5.2.2 Level B For level B packing inflating assemblies shall be packed as specified in 5.2.1. except that the containers shall be of the domestic type and closure shall be in accordance with the requirements for domestic containers

5.2.3. Level C. Packages requiring over packing for acceptance by the carrier shall be packed in shipping containers in a manner that will ensure safe delivery at the lowest transportation and packing charges. Containers shall meet Consolidated Freight Rules or any other rules and regulations applicable to the mode of transportation

5.3 Marking. unit, intermediate, and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The inflating assembly covered by this specification is intended for use as a component of the Types MB-1, MD-1, and LPU-2/P life preservers

6.2 Ordering data. Procurement documents should specify the following:

a. Title, numer and date of this specification
b. First Article requirements (see 4.4.1)
c. Requests for results of First Article tests (see 4.4.2)
d. Selection of inspection activity for sampling plan C (see 4.5.2.4)
c. Selection of applicable levels (see 5.1 and 5.2).

6.3 Test samples. The test samples specified in 4.5.2.6 should be returned to the manufacturer

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article inspection is required, the item(s) should be (a first article sample). The first article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for the first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Subject Term (Key Word) List

Life Preserver
Inflating
Assembly
Valve, Pneumatic Inflator

6.6 Changes from previous issue. Marginal notations are not used in the revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

custodian:
Air Force -99

Preparing activity:
Air Force -82

Reviewers:
DLA - CS

(Project 4220-F393)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

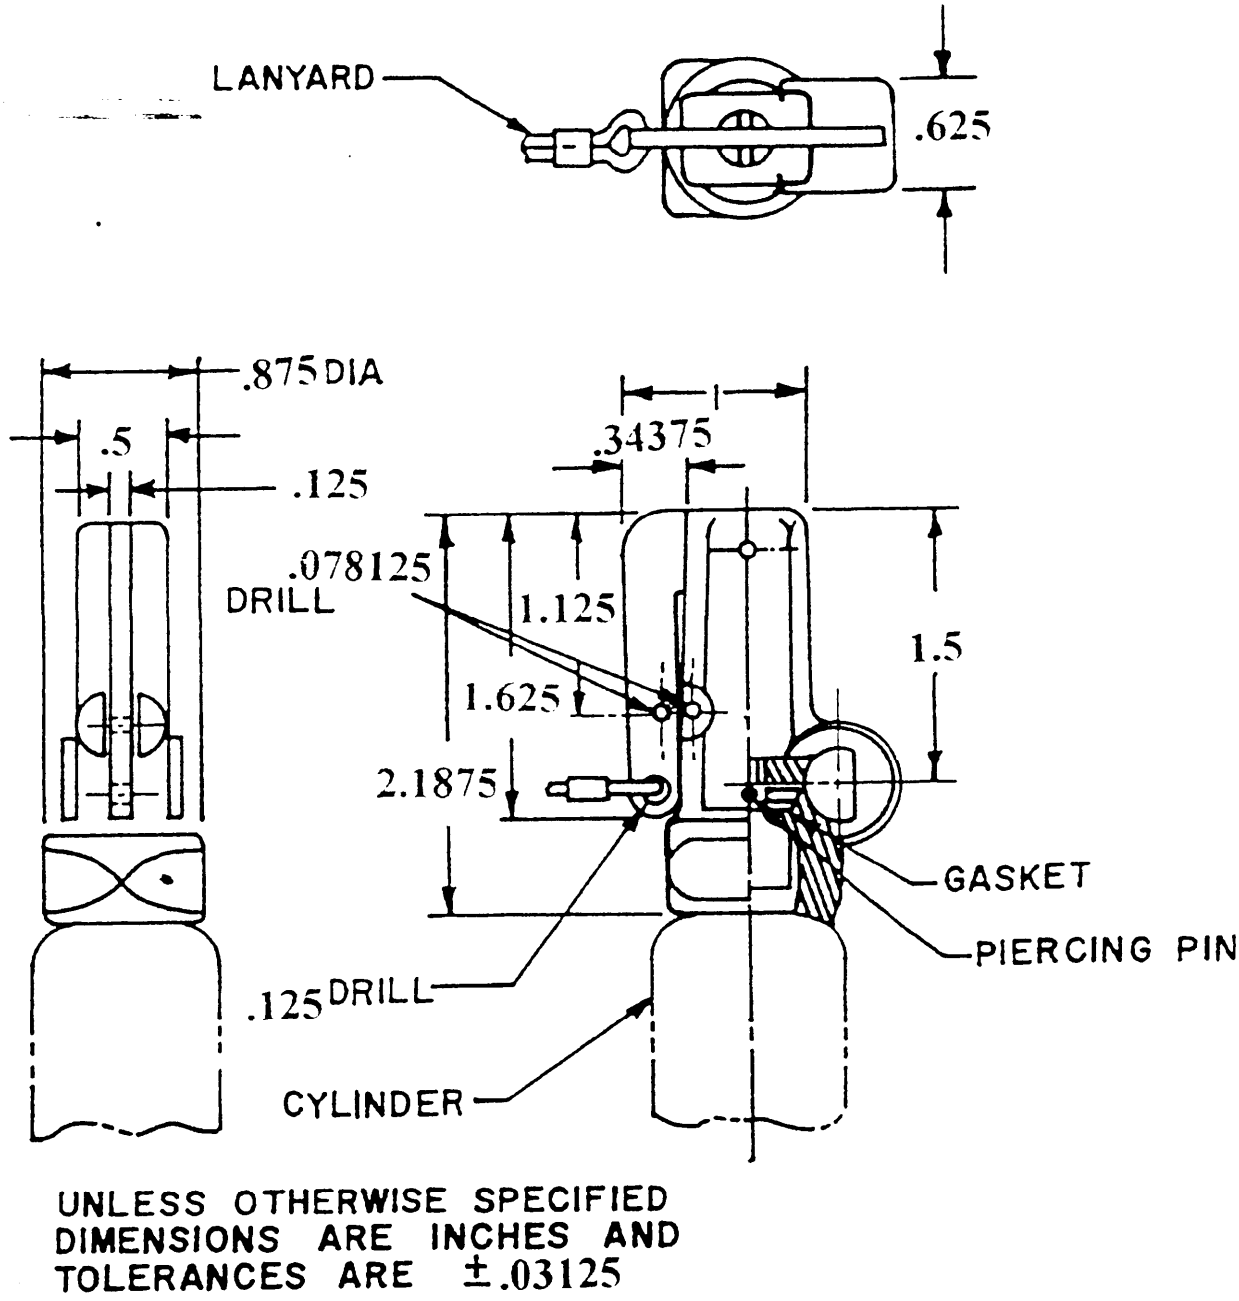


Figure 1. Inflating Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.


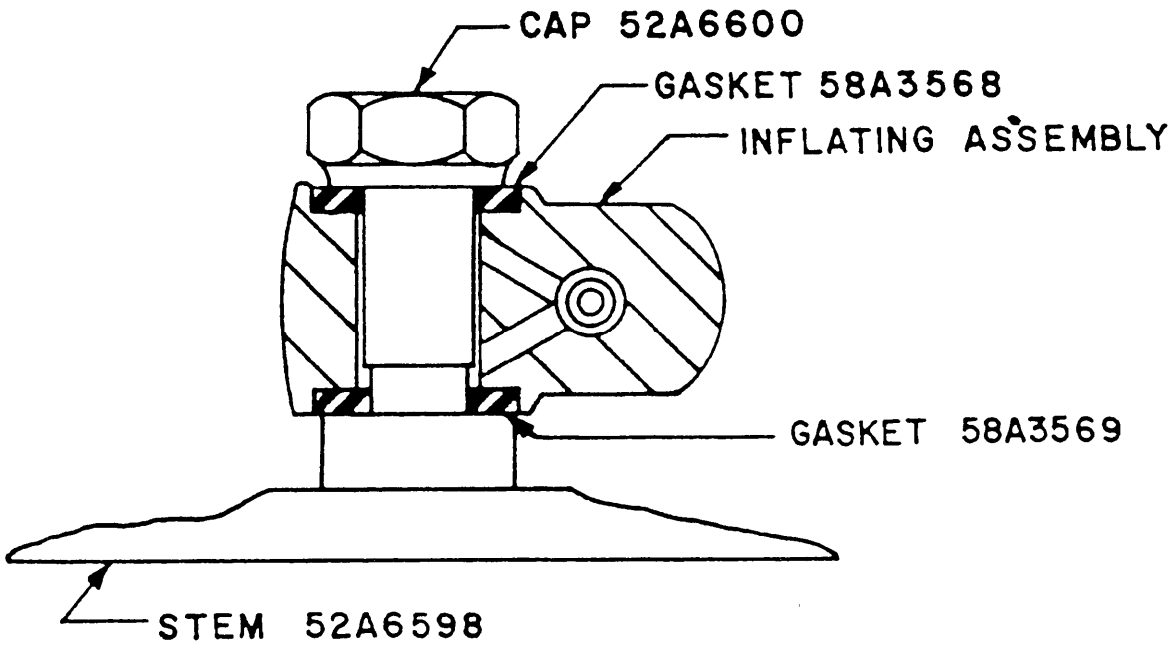


Figure 2 Mounting of Inflating Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

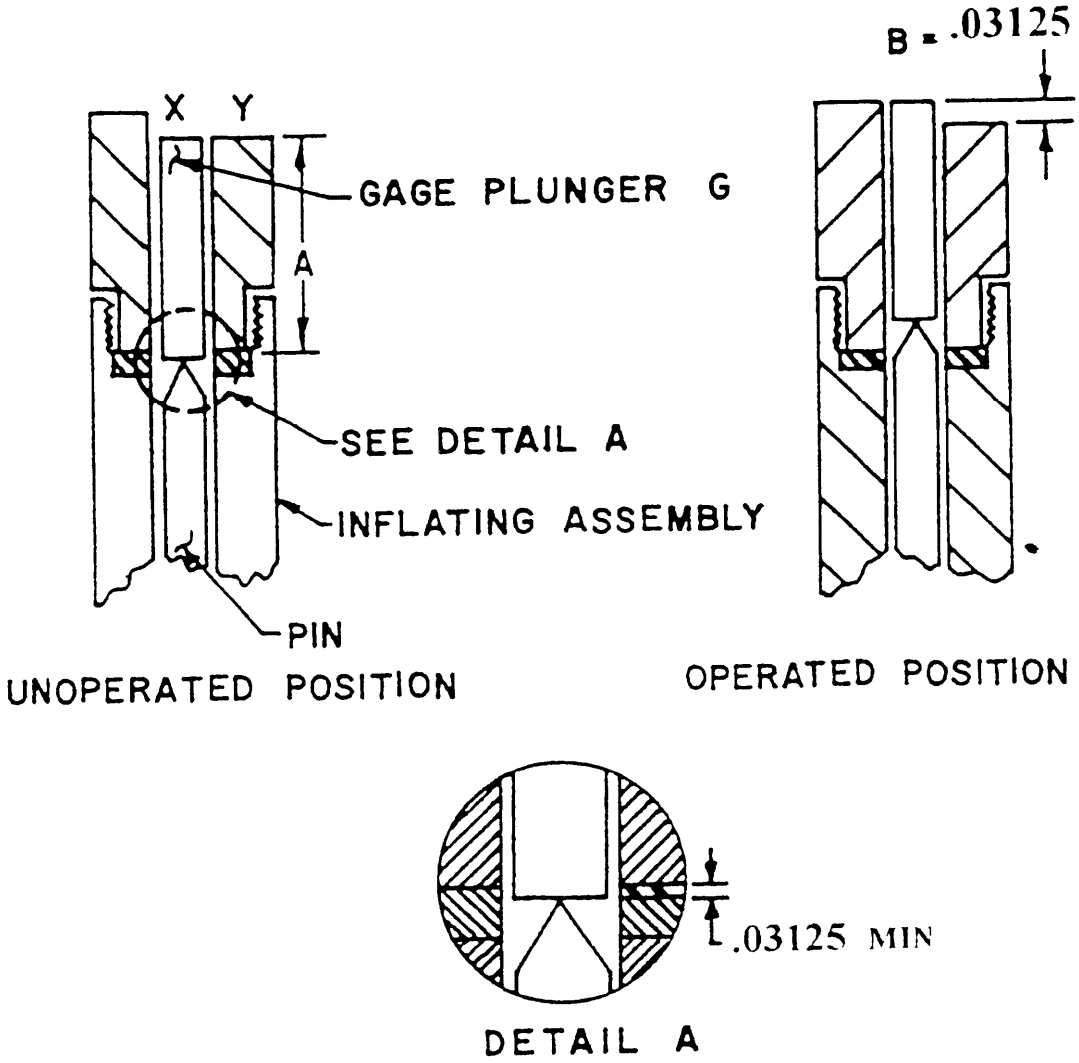

G IS .03125 INCH LONGER THAN A.
WHEN X IS EVEN WITH SURFACE Y, PIN IS .03125 INCH BEHIND SURFACE OF GASKET.
B = DISTANCE PIN SHOULD MOVE G WHEN LEVER OF INFLATING ASSEMBLY IS ACTUATED (SEE 4.6.4.).
UNLESS OTHERWISE SPECIFED DIMENSIONS ARE IN INCHES AND GAGE DIMENSIONS ARE OPTIONAL.

Figure 3 Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-L-25537D(USAF)	12 JULY 94

3. DOCUMENT TITLE
VALVE, PNEUMATIC INFLATION (LIFE PRESERVER, MA-1)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
SA-ALC/[illegible]	(512) [illegible]	[illegible]
c. ADDRESS (Include Zip Code) [illegible] KELLY AFB, TX [illegible]	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete — 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:34Z
Check the source to verify that this is the current version before use.