MILITARY SPECIFICATION

SWITCH, THERMOSTATIC, TYPE MH-1

1. SCOPE

1.1 This specification covers one type of thermostatic switch, designated type MH-1.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-566	-	Boxes, Folding, Paperboard.
PPP-B-636	-	Box, Fiberboard.
PPP-B-676	-	Boxes, Setup.
PPP-T-60	-	Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

MILITARY

MIL-I-10	-	Insulating Compound, Electrical, Ceramic, Class L.
MIL-P-116	-	Preservation, Methods of.
MIL-C-45662	-	Calibration System Requirements.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts.
MIL-STD-454	-	Standard General Requirements for Electronics Equipment.
MIL-STD-1285	-	Marking of Electrical and Electronic Parts.
MS21045	-	Nut, Self Locking, Hexagon-regular Height 450°F, 125 Ksi ft.
MS25041	-	Light, Indicator, Press to Test, Small.
MS25237	-	Lamp, Incandescent, Single Contact, Midget Flanged Base (T-1-3/4 Bulb).

AIR FORCE - NAVY AERONAUTICAL

AN936	-	Washer, Tooth Lock.
AN960	-	Washer, Flat.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T04:26Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies shall be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 Qualification. Switches furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids.

3.2 Material. Material shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the switches to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.2.1 Metals. All metal parts (other than current-carrying parts) exposed to environmental conditions shall be of a corrosion-resistant material or shall be suitably plated to resist corrosion during service life.

3.2.2 Dissimilar metals. When dissimilar metals are used in intimate contact with each other, protection against electrolysis and corrosion shall be provided. The use of dissimilar metals in contact, which tend toward active electrolytic corrosion (particularly, brass, copper, or steel used in contact with aluminum or aluminum alloy), is not acceptable. However, metal-spraying or metal plating of dissimilar base metals to provide similar or suitable abutting surfaces is permitted. The use of dissimilar metals separated by a suitable insulating material is also permitted. Dissimilar metals are defined in 6.4 through 6.4.4 and table III, except that the use of corrosion resistant steel in contact with cadmium plating shall be allowed.

3.2.3 Ceramic. Ceramic insulation shall be grade L411 or higher, in accordance with MIL-I-10.

3.2.4 Fungus resistant material. Unless certification is furnished, materials for fabrication of switches covered by this specification shall conform to requirement 4 of MIL-STD-454. When nutrient materials are used, they shall be treated prior to fabrication of the switches.

3.3 Design and construction. Switches covered by this specification shall be of the design, construction, and physical dimensions specified herein. Switches shall be so constructed as to insure proper operation when mounted in any position.

3.3.1 Weight. The weight of the switch shall not exceed 0.065 pound.

3.3.2 Electrical ratings. The electrical rating of the switch is .15 ampere at 28 volts dc lamp load.

3.4 Calibration. The switch shall operate within the points and tolerances specified in 4.5.2.

3.5 Sensitivity. When switches are tested as specified in 4.5.3, the time required for the switch to actuate shall not exceed 2 seconds.

3.6 Dielectric withstanding voltage. When switches are tested as specified in 4.5.4, there shall be no flashover, arcing, or current flow in excess of 500 microamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

3.7 Insulation resistance. When measured as specified in 4.5.5, the insulation resistance between all insulated terminals and enclosures shall be not less than 20 megohms.

3.8 Thermal shock. When switches are tested as specified in 4.5.6, there shall be no mechanical or electrical damage. The temperature settings shall be within the opening and closing temperature tolerances as specified in 3.4.

3.9 Terminal strength. When switches are tested as specified in 4.5.7, the terminals shall not break, loosen, crack, or affect the operation of the switch.

3.10 Vibration. When switches are tested as specified in 4.5.8, there shall be no opening of closed contacts, nor closing of open contacts, in excess of 10 microseconds. There shall be no evidence of broken, deformed, displaced, or loose parts. The operating points shall be within the tolerances specified in 3.4.

3.11 Shock (specified pulse). Switches shall be tested as specified in 4.5.9, and upon completion of the test there shall be no change in operation, calibration, or evidence of broken, loose, deformed, or displaced parts.

3.12 Salt spray (corrosion). When switches are tested as specified in 4.5.10, switches shall show no evidence of destructive corrosion. After the test, any mounting hardware (if applicable) shall be readily removable. NOTE: Destructive corrosion shall be construed as being any type of corrosion which in any way interferes with the mechanical or electrical performance, or in the case of plated metals, corrosion which has passed through the plating and attacked the base metal.

3.13 Explosion. When switches are tested as specified in 4.5.11, there shall be no explosion within the test chamber, whether or not explosion occurs within the switch.

3.14 Endurance. When tested as specified in 4.5.12, switches shall remain electrically operative.

3.15 Marking. Switches shall be marked in accordance with MIL-STD-1285, with the nomenclature and military part number as follows: Switch, Thermostatic, Type MH-1.

3.16 Workmanship. Switches shall be processed in such a manner as to be uniform in quality and shall be free from cracked or displaced parts, sharp edges, burrs, and other defects which will affect life, serviceability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality and quantity to permit performance of the required inspection shall be established and maintained by the supplier. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment shall be in accordance with MIL-C-45662.

4.2 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test conditions specified in the "GENERAL REQUIREMENTS" of MIL-STD-202.

4.3.1 Sample size. The number of switches to be subjected to qualification inspection shall be as specified (see 3.1 and table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection routine. The sample shall be subjected to the inspections specified in table I, in the order shown. All sample units shall be subjected to the inspections of groups I through IV, in the order shown.

4.3.3 Failures. One or more failures shall be cause for refusal to grant qualification approval.

TABLE I. Qualification inspection.

Examination or test	Requirement paragraph	Method paragraph
Group I (9 sample units)		
Visual and mechanical examination	3.2, 3.3, 3.15 and 3.16	4.5.1
Calibration	3.4	4.5.2
Sensitivity	3.5	4.5.3
Dielectric withstanding voltage	3.6	4.5.4
Insulation resistance	3.7	4.5.5
Thermal shock	3.8	4.5.6
Terminal strength	3.9	4.5.7
Vibration	3.10	4.5.8
Shock (specified pulse)	3.11	4.5.9
Group II (6 sample units)		
Salt spray (corrosion)	3.12	4.5.10
Explosion	3.13	4.5.11
Group III (all sample units)		
Calibration	3.4	4.5.2
Dielectric withstanding voltage	3.6	4.5.4
Insulation resistance	3.7	4.5.5
Visual and mechanical examination	3.2, 3.3, 3.15 and 3.16	4.5.1
Group IV (3 sample units) from group I		
Endurance	3.14	4.5.12

4.4 Quality conformance inspection.

4.4.1 Inspection of product for delivery. Inspection of product for delivery shall consist of group A inspection.

4.4.1.1 Inspection lot. An inspection lot shall consist of all switches of the same type produced under essentially the same conditions, and offered for inspection at one time.

4.4.1.2 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table II, in the order shown.

4.4.1.2.1 Sampling plan. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for general inspection level II. The acceptable quality levels (AQL) shall be as specified in table II. Major and minor defects shall be as defined in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

TABLE II. Group A inspection.

Examination or test	Requirement paragraph	Method paragraph	AQL (percent defective)	
			Major	Minor
Visual and mechanical examination - -	3.2, 3.3, 3.15, and 3.16	4.5.1	1.0	4.0
Calibration - - - - - - - - - - - - - - - -	3.4	4.5.2	1.0	None permitted
Insulation resistance - - - - - - - - - -	3.7	4.5.5	1.0	None permitted

4.4.2 Inspection of preparation for delivery. Sample packages and packs and the inspection of the preservation and packaging, packing, and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

4.5 Methods of examination and test.

4.5.1 Visual and mechanical examination. Switches shall be examined to determine that the materials, design, construction, physical dimensions, markings, and workmanship are in accordance with the applicable requirements (see 3.2, 3.3, 3.15, and 3.16).

4.5.2 Calibration (see 3.4). Switches shall be electrically connected in a manner simulating an actual installation as shown on figure 1. The switch shall be mounted in a metal block having a tapped hole of the proper size and depth. With temperature slowly rising at the rate of 10° F per minute, the switch contacts shall close when the temperature of the fixture reaches 275° ±7° F. Flickering of the lamp as a result of intermittent opening and closing of the switch contacts shall be cause for rejection. The switch contacts shall open when the block temperature is reduced to 260° F minimum.

4.5.3 Sensitivity (see 3.5). The switch shall be mounted in a metal block and connected electrically as indicated on figure 1. A thermocouple shall be installed immediately adjacent to the switch tip. The temperature of the fixture shall be stabilized between 165° and 180° F. The fixture temperature shall then be increased at a rate of not less than 2° F per second to produce a temperature rise of not less than 100° F. The switch contacts shall close within 2 seconds of the time the thermocouple indicates switch calibration set point has been achieved.


4.5.4 Dielectric withstanding voltage (see 3.6). Switches shall be tested in accordance with 4.5.4.1 and 4.5.4.2.

4.5.4.1 At atmospheric pressure. Switches shall be tested in accordance with method 301 of MIL-STD-202. The following details shall apply:


(a) Magnitude of test voltage - 1,000 volts for initial test. When this test is performed more than once on the same switch, the voltage shall be reduced by 25 percent for any subsequent tests.
(b) Nature of potential - DC.
(c) Duration of application of test voltage - 1 minute for qualification, 5 seconds for all other tests.

Source: https://assist.dla.mil -- Downloaded: 202610-20T04:26Z
Check the source to verify that this is the current version before use.

TEMPERATURE RANGE -65° TO 550°F
RATING 0.15 AMP LOAD AT 28 VDC
WHEN SHUNTED WITH 800 Ω RESISTOR.
TORQUE - LIMIT TIGHTENING TORQUE
APPLIED TO TERMINAL NUT TO 20 INCH
POUNDS MAX.

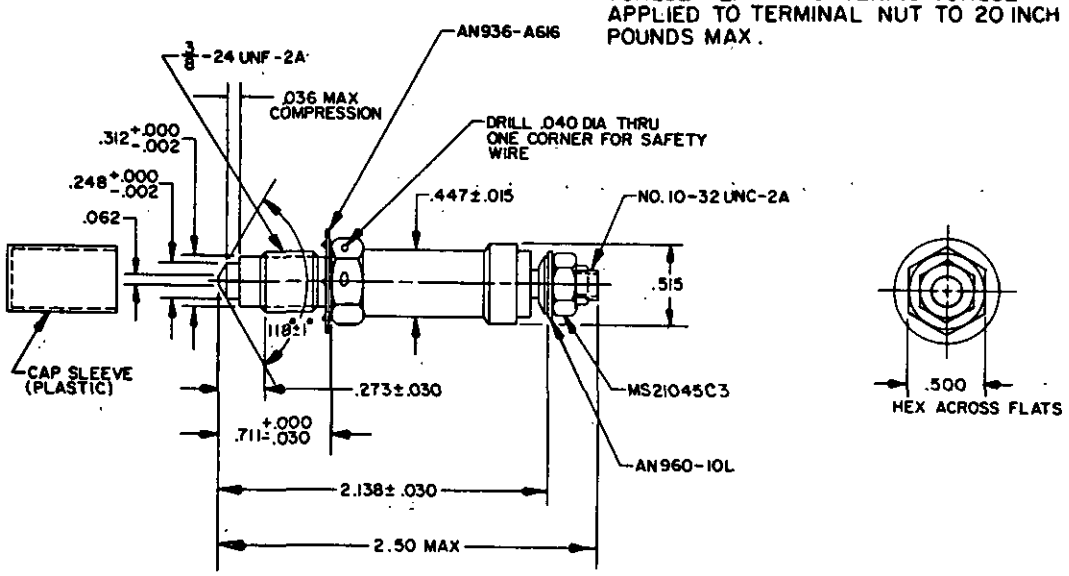

INCHES	MM	INCHES	MM
.002	.05	.312	7.92
.015	.38	.447	11.35
.030	.76	.500	12.70
.036	.91	.515	13.08
.040	1.02	.711	18.06
.062	1.57	2.138	54.31
.248	6.30	2.50	63.50
.273	6.93		

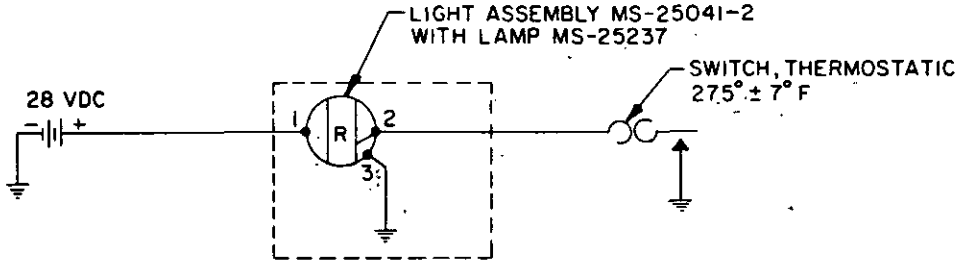

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4mm.

FIGURE 1. Typical installation circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

4.5.4.2 At reduced barometric pressure. Switches designed for operation above 10,000 feet shall be tested as specified in 4.5.4.1, and in accordance with method 105 of MIL-STD-202. The following details and exception shall apply:

(a) Method of mounting - Normal mounting means.
(b) Test condition - C.
(c) Test voltage - 500 volts.

4.5.5 Insulation resistance (see 3.7). Switches shall be tested in accordance with method 302 of MIL-STD-202. The following details shall apply:

(a) Test condition - B.
(b) Points of measurement - Between all terminals and frame or ground.

4.5.6 Thermal shock (see 3.8). Switches shall be tested in accordance with method 107 of MIL-STD-202. The following details and exception shall apply:

(a) Test condition - B.
(b) Measurement before and after cycling - Not applicable.
(c) Examination after test - The temperature settings shall be within the tolerances specified in 3.4.

4.5.7 Terminal strength (see 3.9). Switches shall be tested in accordance with method 211 of MIL-STD-202. The following details and exceptions shall apply:

(a) Test condition - A.
(b) Applied force - 15 pounds.
(c) Direction of force - Force shall be applied along three mutually perpendicular axes of the terminal, one direction of which shall be the one most likely to cause failure.
(d) Time duration - One minute.
(e) Examinations after test - Switches shall be examined for evidence of breaking, loosening, cracking, and other damage affecting the operation of the switch. (Bending of terminals shall not be considered as damage to the switch.)

4.5.8 Vibration (see 3.10). Switches shall be tested in accordance with the applicable test methods of MIL-STD-202, as follows:

(a) Method and test condition: Method 204 (vibration, high frequency), test condition - B.
(b) Test and measurements prior to vibration - Not applicable.
(c) Mounting - The switches shall be rigidly mounted by their normal mounting means on a rigid metal panel. The mounting fixture shall be free from resonances over the test frequency range.
(d) Tests and measurements during vibration - Switch contact stability shall be continuously monitored during vibration in accordance with method 310 of MIL-STD-202.
(e) Tests and measurements after vibration - Switches shall be examined for change in operation, and evidence of broken, deformed, displaced, and loose parts.

4.5.9 Shock (specified pulse) (see 3.11). Switches shall be tested in accordance with method 213 of MIL-STD-202. The following details and exceptions shall apply:

(a) Mounting method and accessories - Switches shall be mounted on a rigid metal panel by their normal mounting means.
(b) Test condition - I.
(c) Tests and measurements during shock - As specified in 4.5.8(d).
(d) Examinations after test - Switches shall be examined for change in operation, and evidence of broken, deformed, displaced, and loose parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

4.5.10 Salt spray (corrosion) (see 3.12). Switches shall be mounted in a manner simulating an actual installation and shall be tested in accordance with method 101 of MIL-STD-202. The following details shall apply:

(a) Mounting: By normal mounting means.
(b) Test condition - B, 5 percent salt solution.
(c) Measurements after exposure - Following the drying period, the switches shall meet the requirements specified in 3.4. Mounting hardware shall be readily removable at the end of the test.

4.5.11 Explosion (see 3.13). Switches shall be tested in accordance with method 109 of MIL-STD-202. The following detail shall apply:

(a) Mechanical and electrical load - Switches shall be operated at their rated load.

4.5.12 Endurance (see 3.14). Switches shall be subjected to 50,000 cycles of operation at a cycling rate of 6 cycles per minute maximum at the rated load. Upon completion of this test, switches shall meet requirements of 3.4.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Switches shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. Switches shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservative application. None required.

5.1.1.4 Unit packaging. Switches shall be individually packaged in accordance with MIL-P-116, method III insuring compliance with the general requirements paragraph under methods of preservation (unit protection) and the physical protection requirements paragraph therein.

5.1.1.5 Intermediate packaging. Switches, packaged as described in 5.1.1.4, shall be placed in intermediate containers conforming to PPP-B-566 or PPP-B-676. Intermediate containers shall be uniform in size, shape and quantities, shall be of minimum tare and cube and shall contain multiples of five unit packages, not to exceed 50 unit packages. No intermediate packaging is required when the total quantity shipped to a single destination is less than 50 unit packages.

5.1.2 Level C. Cleaned and dried switches shall be individually packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The packaged switches shall be packed in fiberboard containers conforming to PPP-B-636, class weather resistant, style optional, special requirements. In lieu of the closure and waterproofing requirements in the appendix of PPP-B-636, closure and waterproofing shall be accomplished by sealing all seams, corners and manufacturer's joint with tape, two inches minimum width, conforming to PPP-T-60, class 1 or PPP-T-76. Banding (reinforcement requirements) shall be applied in accordance with the appendix to PPP-B-636 using nonmetallic or tape banding only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The packaged switches shall be packed in fiberboard containers conforming to PPP-B-636, class domestic, style optional, special requirements. Closures shall be in accordance with the appendix thereto.

5.2.3 Level C. The packaged switches shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier rules and regulations.

5.2.4 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination equal 40 cubic feet or more. Quantities less than 40 cubic feet need not be unitized. Unitized loads shall be uniform in size and quantities to the greatest extent practicable.

5.2.4.1 Level A. Switches, packed as specified in 5.2.1 shall be placed on pallets in conformance with MIL-STD-147, load type I, with a fiberboard cap (storage aid 4) positioned over the load.

5.2.4.2 Level B. Switches, packed as specified in 5.2.2, shall be palletized as specified in 5.2.4.1 except that the fiberboard caps shall be class domestic.

5.2.4.3 Level C. Switches, packed as specified in 5.2.3, shall be unitized with pallets and caps of the type, size and kind commonly used for the purpose and shall conform to the applicable carrier rules and regulations.

5.3 Marking. In addition to any special marking required by the contract or order, each unit package, intermediate and exterior container and unitized load shall be marked in accordance with MIL-STD-129.

5.4 General.

5.4.1 Exterior containers. Exterior containers (see 5.2.1, 5.2.2 and 5.2.3) shall be of a minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

6. NOTES

6.1 Intended use. The switch covered by this specification is intended for use in monitoring the temperature of the generator or alternator at a predetermined level to actuate the warning light circuit, thus warning the operator that the generator or alternator temperature is above the predetermined level.

6.2 Ordering data. For switches covered by this specification, the procurement document should specify the following:

(a) Title number and date of this specification.
(b) Military part number MH-1.
(c) Manufacturer's part number.
(d) Levels of preservation, packaging, packing, and marking (see section 5).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable qualified products list, whether or not such products have actually been so listed by that date. The attention of the supplier is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for qualification is: SMAMA/MMRE, Wright-Patterson AFB, OH 45433.

Source: https://assist.dla.mil -- Downloaded: 202640-20T04:26Z
Check the source to verify that this is the current version before use.

6.4 Intermetallic contact. The finishing of metallic areas to be placed in intimate contact by assembly presents a special problem, since intermetallic contact of dissimilar metals results in electrolytic couples which promote corrosion through galvanic action. To provide the required corrosion protection, intermetallic couples are restricted to those permitted by table III. Table III shows metals and alloys (or platings) by groups which have common electromotive forces (EMF) within 0.05 volt when coupled with a saturated calomel electrode in sea-water at room ambient temperatures. All members of a group are considered as completely compatible, one with the other. Compatible couples between groups have been specified in table III based on a potential difference of 0.25 volt maximum. To simplify any arithmetic involved, table III shows, in addition to EMF against a calomel electrode, a derived "anodic index" with group 1 (gold, etc.) as 0 and group 18 (magnesium, etc.) as 175. Subtraction of a lower group anodic index from a higher index gives the EMF difference in hundredths of a volt.

6.4.1 Groups. Table III sets up 18 primary groups. It may be noted that neither the metallurgical similarity nor dissimilarity of metals is the parameter for selection of compatible couples. All members within a group, regardless of metallurgical similarity, are considered inherently nonsusceptible to galvanic action, when coupled with any member within the group; for example, such dissimilar metals as platinum and gold. Similarly, such basically dissimilar alloys as austenitic stainless steel, silver-solder, and low brass (all members of group 5) are inherently nonsusceptible when coupled together.

6.4.2 Compatibility graphs. Permissible couple series are shown in table III by the graphs at the right. Members of groups connected by lines will form permissible couples. A "O" indicates the most cathodic member of each series, a "●" an anodic member, and the arrow indicates the anodic direction.

6.4.3 Selection of compatible couples. Proper selection of metals in the design of equipment will result in fewer intermetallic contact problems. For example, for sheltered exposure, neither silver nor tin require protective finishes. However, since silver has an anodic index of 15 and tin 65, the EMF generated as a couple is 0.50 volt, which is not allowable by table III. In this case, other metals or platings will be required. It should be noted that, in intermetallic couples, the member with the higher anodic index is anodic to the member with the lower anodic index and will be susceptible to corrosion in the presence of an electrolytic medium. If the surface area of the cathodic part is significantly greater than that of the anodic part, the corrosive attack on the contact area of the anodic part may be greatly intensified. Material selection for intermetallic contact parts, therefore, should establish the smaller part as the cathodic member of the couple, whenever practicable.

6.4.4 Plating. When base metals intended for intermetallic contact form couples not allowed by table III, they are to be plated with those metals which will reduce the potential difference to that allowed by table III.

Source: https://assist.dla.mil -- Downloaded: 202610-20T04:26Z
Check the source to verify that this is the current version before use.

TABLE III. Compatible couples (see 6.4) 1/

Group No.	Metallurgical category	EMF (volt)	Anodic index (0.01 v)	Compatible couples
1	Gold, solid and plated; gold-platinum alloys; wrought platinum (most cathodic)	+ 0.15	0	
2	Rhodium plated on silver-plated copper	+ 0.05	10	
3	Silver, solid or plated; high silver alloys	0	15	
4	Nickel, solid or plated; monel metal, high nickel-copper alloys	- 0.15	30	
5	Copper, solid or plated; low brasses or bronzes; silver solder; German silver; high copper-nickel alloys; nickel-chromium alloys; austenitic corrosion-resistant steels	- 0.20	35	
6	Commercial yellow brasses and bronzes	- 0.25	40	
7	High brasses and bronzes; naval brass; Muntz metal	- 0.30	45	
8	18 percent chromium type corrosion-resistant steels	- 0.35	50	
9	Chromium, plated; tin, plated; 12 percent chromium type corrosion-resistant steels	- 0.45	60	
10	Tin-plate; terneplate; tin-lead solder	- 0.50	65	
11	Lead, solid or plated; high lead alloys	- 0.55	70	
12	Aluminum, wrought alloys of the duralumin type	- 0.60	75	
13	Iron, wrought, gray, or malleable; plain carbon and low alloy steels, armco iron	- 0.70	85	
14	Aluminum, wrought alloys other than duralumin type; aluminum, case alloys of the silicon type	- 0.75	90	
15	Aluminum, cast alloys other than silicon type; cadmium, plated and chromated	- 0.80	95	
16	Hot-dip-zinc plate; galvanized steel	- 1.05	120	
17	Zinc, wrought; zinc-base die-casting alloys; zinc, plated	- 1.10	125	
18	Magnesium and magnesium-base alloys, cast or wrought (most anodic)	- 1.60	175	

1/ Compatible couples - potential difference of 0.25 volt maximum between groups.

Source: https://assist.dla.mil -- Downloaded: 202610-20T04:26Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 80

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5930-F317)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971 -714-156/423

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:26Z
Check the source to verify that this is the current version before use.