DOD-STD-35-I150W

15 January 1979

MILITARY STANDARD

HEAT SINKS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Heat Sinks
Automated Engineering
Document Preparation System

DOD-STD-35-115(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-115(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Heat Sinks.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	4
	4.	GENERAL REQUIREMENTS	5
	4.1	Introduction	5
	4.2	Specification Requirement Sheet (SRS)	5
	4.3	Configuration	5
	4.3.1	Dimensions	5
	4.3.2	Illustrations	5
	4.4	Units of measure	5
	5.	DETAILED REQUIREMENTS	6
	5.1	Introduction	6
	5.2	MSE Formats	6
	5.3	Referenced documents	6
	5.4	Test matrix	6
	5.5	Tabulation	7
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.6.1	Interrelationship of Codes	9
	5.6.2	Automatic MSE Data	9
	5.6.3	DOD-STD-35 Tables	9

TABLES

Table	1.	Title Index	2
	11.	Test matrix	7
	111.	Tabulation candidates	8

APPENDICES

Appendix	A.	Illustrations	66
	B.	Characteristic Code Index	73
		Index	76

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Heat Sinks.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Exception Specification Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
HEAT SINK, ELECTRICAL OR ELECTRONIC COMPONENT	440001	MIL-S-24251	SHIELDS, HEAT DISSIPATING
		MIL-H-87111	HEAT SINKS, SEMICONDUCTOR DEVICES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-24251	Shields, Retainers (Bases), and Adapters Electron Tube, Heat Dissipating
MIL-H-87111	Heat Sinks, Semiconductor Devices, General Specifications For

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing-and Materials, 1916 Race St., Philadelphia, PA 19103.

DIA-COMP-BUL-N0.5	Recommended Test Procedure for Semiconductor Thermal Dissipating Devices.

(Application for copies should be addressed to Electronic Industries Association, 2001 Eye Street, N.W., Washington, D.C. 20006).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Heat Sinks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Heat Sinks, it is necessary to use DOD-STS-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Heat Sinks.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Heat Sinks.

4.3.2 Illustrations. Illustrations applicable to Heat Sinks are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions); Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sectins 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Heat Resistance 2122
MIL-H-87111		X
MIL-S-24251		X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Heat Sinks characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1572	MATE COMPO CASE JEDEC (DES)	1573	CLASS (DES)	1574	THERMAL RESISTANCE DEG C/WATT
1575	THERMAL RESISTANCE FORCED CONVECTION DEG C/WATT	1656	CAP (PF)	1658	MAX CAP (PF)
6943	WEIGHT MIN PER UNIT OUNCES	6944	WEIGHT MIN PER UNIT POUNDS	6945	WEIGHT MIN PER UNIT GRAMS
6946	WEIGHT MIN PER UNIT KILOGRAMS	7021	WEIGHT MAX PER UNIT GRAMS	7022	WEIGHT MAX PER UNIT OUNCES
7023	WEIGHT MAX PER UNIT POUNDS	7024	WEIGHT MAX PER UNIT KILOGRAMS	7045	WEIGHT MIN PER FOOT OUNCES
7046	WEIGHT MIN PER FOOT POUNDS	7050	WEIGHT MAX PER FOOT OUNCES	70511	WEIGHT MAX PER FOOT POUNDS
7348	WEIGHT MIN PER METER GRAMS	7349	WEIGHT MIN PER METER KILOGRAMS	7400	WEIGHT MAX PER METER GRAMS
7403	WEIGHT MAX PER METER KILOGRAMS				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes a part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for “X” entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
O1O1	0101.
0102	0102.
0103	0103.
O104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
MATING COMPONENT CASE JEDEC (DESIGNATION)	1572
CLASS (DESIGNATION)	1573
RATING	
THERMAL RESISTANCE	
NATURAL CONVECTION (DEGREES CELSIUS PER WATT)	1574
FORCED CONVECTION (DEGREES CELSIUS PER WATT)	1575
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
#UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CLASSIFICATION.

1572 THE MATING COMPONENT CASE SHALL BE THE JEDEC DESIGNATION 1572.

1573 THE COMPONENT CLASS SHALL BE 1573 IN ACCORDANCE WITH THE BASE DOCUMENT.

RATING.

1574 THE THERMAL RESISTANCE OF THE HEAT SINK, UNDER NATURAL CONVECTION CONDITIONS, SHALL BE 1574 DEGREES CELSIUS PER WATT.

1575 THE THERMAL RESISTANCE OF THE HEAT SINK, UNDER FORCED CONVECTION CONDITIONS, SHALL BE 1575 DEGREES CELSIUS PER WATT.

CONFIGURATION.

1009 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

7572 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED? SHALL BE IN INCHES OR DEGREES.

7576 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.

7577 ALL DIMENSIONS, UNLESS OTHERWISE Specified SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE : THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4950 ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL–TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
HEAT DISSIPATING SURFACE	
(SQUARE INCHES PER LINEAR INCH)	1576
(SQUARE MILLIMETERS PER LINEAR MILLIMETER)	1578
HEAT SINK MOUNTING SCREW TORQUE	
(POUND-INCHES)	1580
(NEWTON METERS)	1582
MAXIMUM SURFACE ROUGHNESS HEIGHT IN MOUNTING AREA, ARITHMETICAL AVERAGE	
(MICROINCHES)	1584
(MICROMETERS)	1586
MAXIMUM MOUNTING SURFACE FLATNESS DEVIATION TOTAL INDICATOR RUNOUT	
(INCHES PER INCH)	1588
(MILLIMETERS PER MILLIMETER)	1590

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION.

1576 THE HEAT DISSIPATION SURFACE SHALL BE 1576 SQUARE INCHES PER LINEAR INCH.

1578 THE HEAT DISSIPATION SURFACE SHALL BE 1578 SQUARE MILLIMETERS PER LINEAR MILLIMETER.

1580 THE HEAT SINK MOUNTING SCREW TORQUE SHALL BE 1580 POUND-INCHES.

1582 THE HEAT SINK MOUNTING SCREW TORQUE SHALL BE 1582 NEWTON METERS.

1584 THE SURFACE ROUGHNESS HEIGHT IN THE MOUNTING AREA, USING THE ARITHMETICAL AVERAGE METHOD, SHALL BE NOT GREATER THAN 1584 MICROINCHES.

1586 THE SURFACE ROUGHNESS HEIGHT IN THE MOUNTING AREA, USING THE ARITHMETICAL AVERAGE METHOD, SHALL BE NOT GREATER THAN I586 MICROMETERS.

1588 THE TOTAL INDICATOR RUNOUT FOR MOUNTING SURFACE FLATNESS DEVIATION SHALL BE NOT GREATER THAN 1588 INCHES PER INCH.

1590 THE TOTAL INDICATOR RUNOUT FOR MOUNTING SURFACE FLATNESS DEVIATION SHALL BE NOT GREATER THAN 1590 MILLIMETERS PER MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI) .

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
MINIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7045
(POUNDS)	7046
PER METER (SELECT ONE)	
(GRAMS)	7348
(KILOGRAMS)	7349

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6943 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).

6944 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

6945 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).

6946 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).

7045 MINIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT LESS THAN 7045 OUNCE(S).

7046 MINIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT LESS THAN 7046 POUND(S).

7348 MINIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT LESS THAN 7348 GRAM(S).

7349 MINIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT LESS THAN 7349 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7050
(POUNDS)	7051
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	74011

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

7050 MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7050 OUNCE(S).

7051 MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).

7400 MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).

7401 MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
AS FOLLOWS:	1654
CAPACITANCE (PICOFARADS)	1656
MAXIMUM CAPACITANCE (PICOFARADS)	1658
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-STD-202, METHOD 3050	1682
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1663
(KILOHERTZ)	1684
(MEGAHERTZ)	1688
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	1664
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1665
(PICOFARADS)	1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	CAPACITANCE- THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1656	CAPACITANCE SHALL BE 1656 PICOFARAD(S).
1658	CAPACITANCE SHALL BE NOT GREATER THAN 1658 PICOFARAD(S).
1660	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1682	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.
1663	THE TEST FREQUENCY SHALL BE 1663 HERTZ.
1684	THE TEST FREQUENCY SHALL BE 1684 KILOHERTZ.
1688	THE TEST FREQUENCY SHALL BE 1688 MEGAHERTZ.
1664	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1664 VOLTS, DC.
1665	THE ACCURACY OF THE MEASUREMENT SHALL BE 1665 PERCENT.
1694	THE ACCURACY OF THE MEASUREMENT SHALL BE 1694 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
PER MIL-STD-202, METHOD 305. (CONT)	
POINTS OF MEASUREMENT	
BETWEEN ITEM CASE AND MOUNTING PLATE	1696
OTHER ____	1698
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 3011.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

THE POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:

1696 BETWEEN THE ITEM CASE AND THE MOUNTING PLATE.

1698 1698.

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN ~~4875~~ MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

5000 MOUNTING SHALL BE IN ACCORDANCE WITH 50000

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT,

4870 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

6267 METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CONTACT (DC RESISTANCE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	l600
AS FOLLOWS:	1602
MAXIMUM DC RESISTANCE (SELECT ONE)	
(OHMS)	1604
(MEGOHMS)	1606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1620
PER MIL-S-24251.	1622
MEASURE INSULATION RESISTANCE WITHOUT PENETRATING COATING.	1624
TEST VOLTAGE (VOLTS DC)	1626
ENGAGING FORCE AT HIGH TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1600	ELECTRICAL CONTACT (DC RESISTANCE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1600.~~
1602	ELECTRICAL CONTACT (DC RESISTANCE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1604	THE DC RESISTANCE SHALL BE NOT GREATER THAN 1604 OHM(S).
1606	THE DC RESISTANCE SHALL BE NOT GREATER THAN ~~1606~~ MEGOHM(S).
1620	ELECTRICAL CONTACT (DC RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1620~~.
1622	ELECTRICAL CONTACT (DC RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24251.
1624	MEASURE INSULATION RESISTANCE WITHOUT PENETRATING COATING.
1626	THE TEST VOLTAGE SHALL BE 1626 VOLTS DC.
1800	ENGAGING FORCE AT HIGH Temperature THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1800~~.
1802	ENGAGING FORCE AT HIGH TEMPERATURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENGAGING FORCE AT HIGH TEMPERATURE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM PERCENT OF INITIAL FORCE (PERCENT)	1804
MINIMUM PERCENT OF INITIAL FORCE (PERCENT)	1806
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT. _____	1820
PER MIL-S-24251.	1822
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1824
CONDITIONING TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	1826
CONDITIONING TEMPERATURE DURATION (HOURS)	1828
ENGAGING FORCE AT LOW TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
MAXIMUM PERCENT OF INITIAL ENGAGING FORCE (PERCENT)	1904

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1804 THE ENGAGING FORCE SHALL BE NOT GREATER THAN ~~1804~~ PERCENT OF THE INITIAL FORCE.

1806 THE ENGAGING FORCE SHALL BE NOT LESS THAN ~~1806~~ PERCENT OF THE INITIAL FORCE.

1820 ENGAGING FORCE AT HIGH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1820~~.

1822 ENGAGING FORCE AT HIGH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24251.

%824 THE CONDITIONING TEMPERATURE SHALL BE ~~1824~~ DEGREES CELSIUS.

1826 THE CONDITIONING TEMPERATURE SHALL BE PLUS OR MINUS ~~1826~~ DEGREES CELSIUS.

1828 THE DURATION OF TEMPERATURE CONDITIONING SHALL BE ~~1828~~ HOUR(S).

1900 ENGAGING FORCE AT LOW TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1900~~.

1902 ENGAGING FORCE AT LOW TEMPERATURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1904 THE ENGAGING FORCE SHALL BE NOT GREATER THAN ~~1904~~ PERCENT OF THE INITIAL FORCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENGAGING FORCE AT LOW TEMPERATURE (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM PERCENT OF INITIAL ENGAGING FORCE (PERCENT)	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920
PEP MIL-S-24251.	1922
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1924
CONDITIONING TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	1926
CONDITIONING TEMPERATURE DURATION (HOURS)	1928
FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DUCUMENT EXCEPT ____	1700
AS FOLLOWS:	1702
LINER SHALL REMAIN IN POSITION.	1704
NO EVIDENCE OF CRACKING.	1706
CONFORM TO DISSIPATION Requirements	1708
MAXIMUM INSTALLATION OR REMOVAL FORCE PERCENT OF INITIAL ENGAGING FORCE (PERCENT)	1710

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1906 THE ENGAGING FORCE SHALL BE NOT LESS THAN 1906 PERCENT OF THE INITIAL FORCE.

1920 ENGAGING FORCE AT LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.

1922 ENGAGING FORCE AT LOW TEMPERATURES TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24251.

1924 THE CONDITIONING TEMPERATURE SHALL BE 1924 DEGREES CELSIUS.

1926 THE CONDITIONING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1926 DEGREES CELSIUS.

1928 THE DURATION OF TEMPERATURE CONDITIONING SHALL BE 1928 HOUR(S).

1700 FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.

1702 FATIGUE. THE REQUIREMENT(S) SHALL BE-AS FOLLOWS:

1704 THE LINER SHALL REMAIN IN POSITION.

1706 THERE SHALL BE NO EVIDENCE OF CRACKING OF THE MATERIAL.

1708 THE ITEM SHALL CONFORM TO DISSIPATION REQUIREMENT(S).

1710 THE INSTALLATION OR REMOVAL FORCE SHALL BE NOT GREATER THAN 1710 PERCENT OF THE ITITIAL ENGAGING FORCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FATIGUE (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM INSTALLATION OR REMOVAL FORCE PERCENT OF INITIAL ENGAGING FORCE (PERCENT)	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1720
PER MIL-S-24251.	1722
NUMBER OF INSTALLATIONS AND REMOVALS (QUANTITY)	1724
HEAT DISSIPATION (THERMAL RESISTANCE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
AS FOLLOWS:	2002
MINIMUM AVERAGE CASE TEMPERATURE REDUCTION (DEGREES CELSIUS)	2004
MINIMUM THERMAL RESISTANCE (DEGREES CELSIUS PER WATT)	2006

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1712 THE INSTALLATION OR REMOVAL FORCE SHALL BE NOT LESS THAN 1712 PERCENT OF THE INITIAL ENGAGING FORCE.

1720 FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1720.

1722 FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-25251.

1724 THE ITEM SHALL BE INSTALLED AND REMOVED 1724 TIMES.

2000 HEAT DISSIPATION (THERMAL RESISTANCE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.

2002 HEAT DISSIPATION (THERMAL RESISTANCE). THE REQUIREMENT(S) REQUIREMENT(S) SHALL BE AS FOLLOWS:

2004 THE AVERAGE CASE TEMPERATURE REDUCTION SHALL BE NOT LESS THAN 2004 DEGREES CELSIUS*

2006 THE THERMAL RESISTANCE SHALL BE NOT LESS THAN 2006 DEGREES CELSIUS PER WATT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT DISSIPATION (THERMAL RESISTANCE) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2020
PER MIL-S-24251.	2022
AMBIENT TEMPERATURE (DEGREES CELSIUS)	2024
AMBIENT TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2026
USE CALIBRATED THERMAL INSTRUMENTS AND COUPLES AS FOLLOWS:	2028
MEASURE MAXIMUM TEMPERATURE OF SEMICONDUCTOR (DEGREES CELSIUS)	2030
MEASURE MAXIMUM TEMPERATURE OF SEMICONDUCTOR, HEAT SINK ATTACHED (DEGREES CELSIUS)	2032
MINIMUM NUMBER OF TEMPERATURE READINGS (QUANTITY)	2034
PER EIA COMPONENTS BULLETIN NUMBER 5.	2036
MOUNT THERMOCOUPLES ADJACENT TO THERMAL SOURCE.	2038

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2020	HEAT DISSIPATION (THERMAL RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2020.
2022	HEAT DISSIPATION (THERMAL RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24251.
2024	THE AMBIENT TEMPERATURE SHALL BE 2024 DEGREES CELSIUS.
2026	THE AMBIENT TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2026 DEGREES CELSIUS.
2028	USE CALIBRATED THERMAL INSTRUMENTS AND COUPLES AS FOLLOWS:
2030	THE SEMICONDUCTOR TEMPERATURE SHALL BE NOT GREATER THAN. DEGREES CELSIUS WHEN MEASURED.
2032	THE TEMPERATURE OF THE SEMICONDUCTOR WITH HEAT SINK ATTACHED SHALL BE NOT GREATER THAN 2032 DEGREES CELSIUS WHEN MEASURE
2034	THE NUMBER OF TEMPERATURE READINGS SHALL BE NOT LESS THAN 2034.
2036	HEAT DISSIPATION (THERMAL RESISTANCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE ELECTRONICS INDUSTRIES ASSOCIATION COMPONENTS BULLETIN NUMBER 5.
2038	THE THERMOCOUPLES SHALL BE MOUNTED ADJACENT TO THE THERMAL SOURCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
NO EVIDENCE OF PEELING, BLISTERING CHIPPING OR PITTING.	2102
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2120
PER DOCUMENT (DOC DES)	2122
HIGH TEMPERATURE (DEGREES CELSIUS)	2124
TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2126
HIGH TEMPERATURE DURATION (HOURS)	2128
ROOM TEMPERATURE DURATION (HOURS)	2130

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2100	HEAT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2100.
2102	HEAT RESISTANCE. THERE SHALL BE NO EVIDENCE OF PEELING, BLISTERING, CHIPPING OR PITTING OF THE MATERIAL.
2120	HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	HEAT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2122.
2124	HIGH TEMPERATURE TEST TEMPERATURE SHALL BE 2124 DEGREES CELSIUS.
2126	THE HIGH TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2126 DEGREES CELSIUS.
2128	THE DURATION OF THE HIGH TEMPERATURE TEST SHALL BE 2128 HOUR(S).
2130	THE DURATION OF ROOM TEMPERATURE SHALL BE 2130 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE,	4815
REMAIN WITHIN SPECIFIED TOLERANCE-	4791
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MOUNTED COMPONENT CASE AND MOUNTING PLATE	2450

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE,

4815 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

4791 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4795 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.

4805 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.

4788 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

4853 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.

4890 TEST CONDITION LETTER 4890 SHALL APPLY.

4793 MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 HOUR(S).

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

2450 BETWEEN MOUNTED COMPONENT CASE AND MOUNTING PLATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
POINTS OF APPLICATION OF POLARIZING VOLTAGE: (CONT)	
OTHER ____	2452
SPECIAL PREPARATION ____	2454
INITIAL ENGAGING FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
AS FOLLOWS:	2202
MAXIMUM INITIAL ENGAGING FORCE	
(POUNDS)	2204
(NEWTONS)	2206
MAXIMUM INITIAL ENGAGING TORQUE	
(POUND-INCHES)	2208
(NEWTON METERS)	2210
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2452 2452.

2454 SPECIAL PREPARATION SHALL BE 2454.

2200 INITIAL ENGAGING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.

2202 INITIAL ENGAGING FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2204 THE INITIAL ENGAGING FORCE SHALL BE NOT GREATER THAN 2204 POUND(S).

2206 THE INITIAL ENGAGING FORCE SHALL BE NOT GREATER THAN 2206 NEWTON(S).

2208 THE INITIAL ENGAGING TORQUE SHALL BE NOT GREATER THAN 2208 POUND-INCH(S).

2210 THE INITIAL ENGAGING TORQUE SHALL BE NOT GREATER THAN 2210 NEWTON METER(S).

2220 INITIAL ENGAGING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2220.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INITIAL ENGAGING FORCE (CONT)	
TEST METHODS (CONT)	
MEASURE ENGAGING FORCE AT AMBIENT ROOM TEMPERATURE.	2222
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2222 INITIAL ENGAGING FORCE. TESTING SHALL BE PERFORMED BY MEASURING THE INITIAL ENGAGING FORCE AT AMBIENT ROOM TEMPERATURE.

1380 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

6359 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1386 INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:

1497 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

1498 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

1522 BETWEEN MUTUALLY INSULATED PARTS.

1523 BETWEEN ALL INSULATED PARTS AND GROUND.

1524 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

1520 SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
MAXIMUM PERMEABILITY (MU)	2302
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
PER MIL-I-17214 INSTRUMENT.	2322
RETENTION STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2700
AS FOLLOWS:	2702

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1372 FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.

1381 SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

1383 TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

2300 PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.

2302 PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 2302 MU.

2320 PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.

2322 PERMEABILITY. TESTING SHALL BE PERFORMED WITH AN INSTRUMENT CONFORMING TO MIL-I-17214.

2700 RETENTION STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2700.

2702 RETENTION STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RETENTION STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
INSTALLATION FORCE (SELECT ONE)	
(POUNDS)	2704
(OUNCES)	2706
(NEWTONS)	2708
REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2710
(OUNCES)	2712
(NEWTONS)	2714
REMOVAL FORCE AFTER FATIGUE TESTING (SELECT ONE)	
(POUNDS)	2716
(OUNCES)	2718
(NEWTONS)	2720
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2704 THE INSTALLATION FORCE SHALL BE ~~2704~~ POUND(S).

2706 THE INSTALLATION FORCE SHALL BE ~~2706~~ OUNCE(S).

2708 THE INSTALLATION FORCE SHALL BE ~~2708~~ NEWTON(S).

2710 THE REMOVAL FORCE SHALL BE ~~2710~~ POUND(S).

2712 THE REMOVAL FORCE SHALL BE 2712 OUNCE(S).

2714 THE REMOVAL FORCE SHALL BE 2714 NEWTON(S).

2716 THE REMOVAL FORCE AFTER FATIGUE TESTING SHALL BE 2716 POUND(S).

2718 THE REMOVAL FORCE AFTER FATIGUE TESTING SHALL BE 2718 OUNCE(S).

2720 THE REMOVAL FORCE AFTER FATIGUE TESTING SHALL BE 2720 NEWTON(S).

2730 RETENTION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RETENTION STRENGTH (CONT)	
TEST METHODS (CONT)	
PER MIL-H-87111.	2732
NUMBER OF INSTALLATIONS AND REMOVALS (QUANTITY)	2734
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
NO PEELING, BLISTERING, CHIPPING, OR PITTING OF FINISH.	2400
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2732 RETENTION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-87111.

2734 THERE SHALL BE 2734 INSTALLATION(S) AND REMOVAL(S).

4878 SALT SPRAY. THE REQUIREMENT SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

4782 THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.

2400 SALT SPRAY. THERE SHALL BE NO PEELING, Blistering CHIPPING? OR PITTING OF THE FINISH.

4770 SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47700

4773 SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.

4772 TEST CONDITION LETTER 4772 SHALL APPLY.

4765 MOUNTING SHALL BE BY THE NORMAL METHOD.

4766 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-750, METHOD 2016.	2914
PULSE VALUE (G^IS)	7319
DURATION (MILLISECONDS)	7320
BLOWS (NUMBER)	2916
DIRECTION OF BLOWS ____	2918
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
REMAIN WITHIN SPECIFIED TOLERANCE.	4703

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7315 SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.

7316 SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

7311 SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.

2914 SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-750.

7319 THE PEAK VALUE OF THE SHOCK PULSE SHALL BE 7319 G'S.

7320 THE DURATION OF THE SHOCK PULSE SHALL BE 7320 MILLISECOND(S).

2916 THERE SHALL BE 2916 BLOW(S).

2918 THE DIRECTION OF BLOWS SHALL BE 2918 .

1508 SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.

3509 SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4703 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
NO LOOSENING OF PARTS.	2504
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	I448

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1502 SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

1500 SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.

1504 TEST CONDITION LETTER 1504 SHALL APPLY.

4686 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4685 MOUNTING SHALL BE BY THE NORMAL METHOD.

1455 VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.

1456 Vibration HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1469 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

2504 THERE SHALL BE NO LOOSENING OF PARTS.

1446 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1446.~~

1447 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.

1448 TEST CONDITION LETTER 1448 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
NORMAL MOUNTING MEANS.	4708
ANY SUITABLE MOUNTING METHOD.	4709
VIBRATION VARIABLE FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
NO EVIDENCE OF PHYSICAL DAMAGE.	2602
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2620
PER MIL-STD-750, METHOD 2056.	2622
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4708 MOUNTING SHALL BE BY THE NORMAL METHOD.

4709 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

2600 VIBRATION VARIABLE FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.

2602 VIBRATION VARIABLE Frequency THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

2620 VIBRATION VARIABLE FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2620.

2622 VIBRATION VARIABLE FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2056 OF MIL-STD-750.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army:

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A208)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

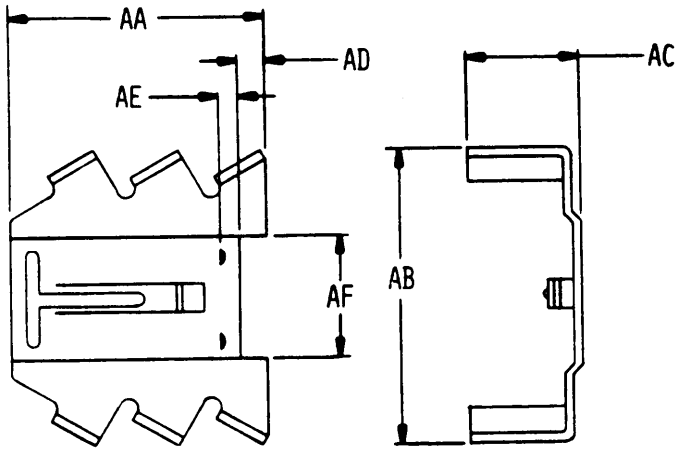


440-01-1

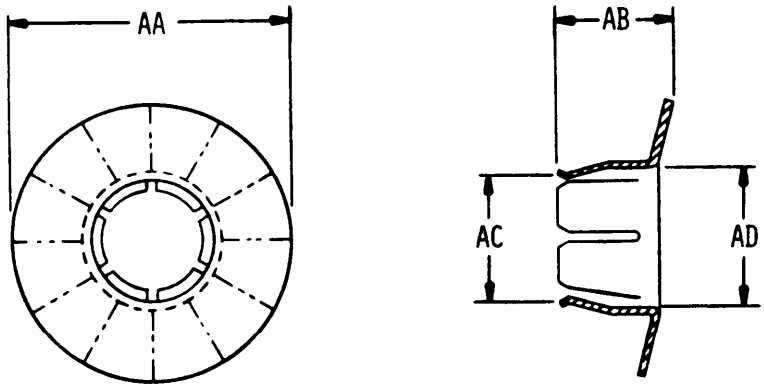


440-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

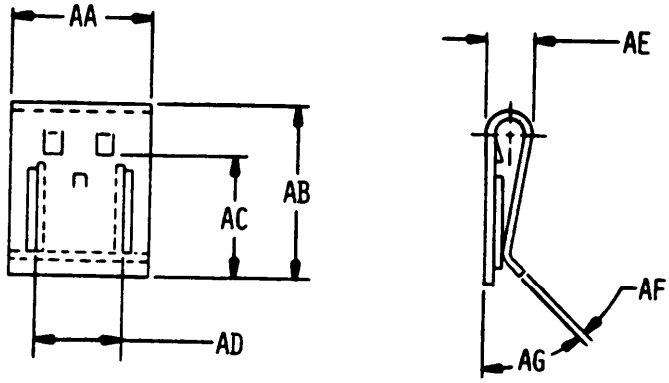


440-01-3

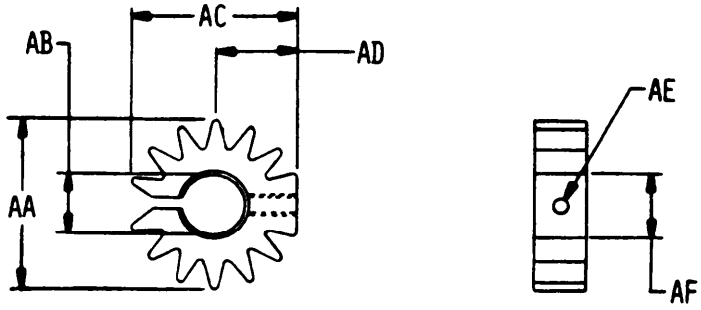


440-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

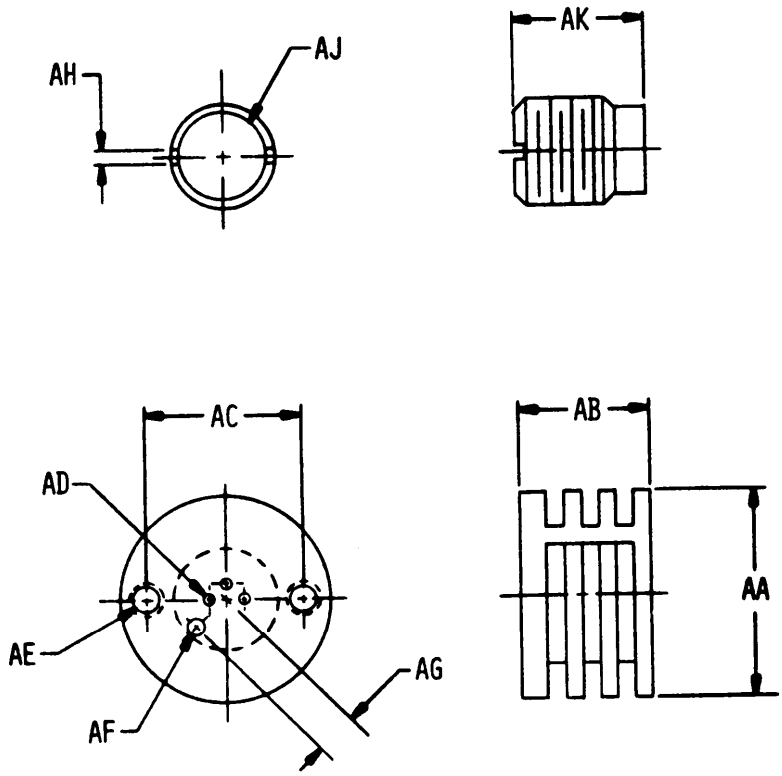


440-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

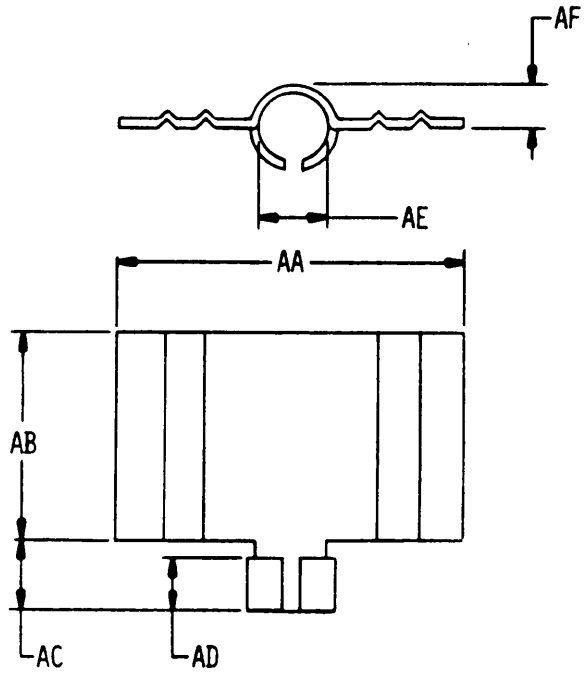


440-01-6

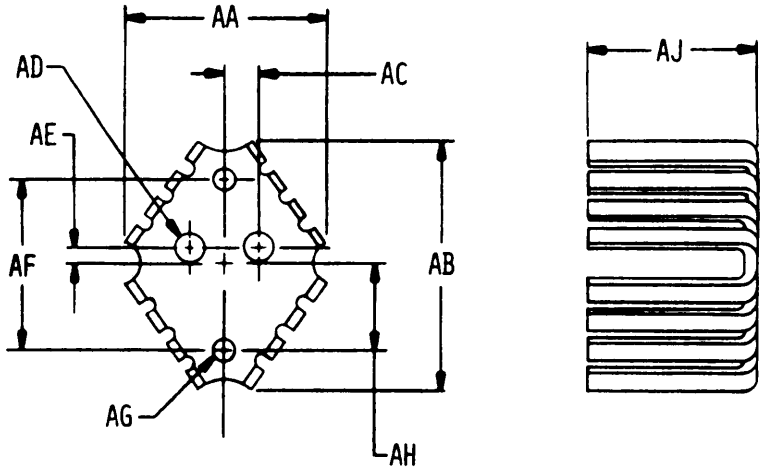


440-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

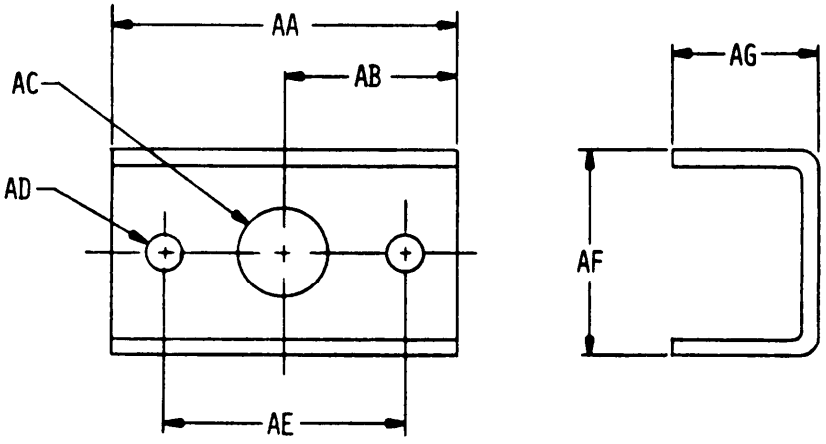


440-01-8

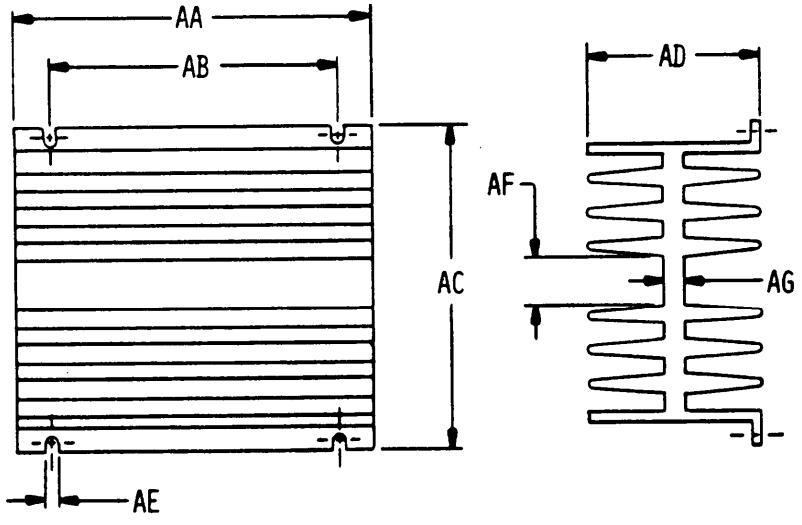

440-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

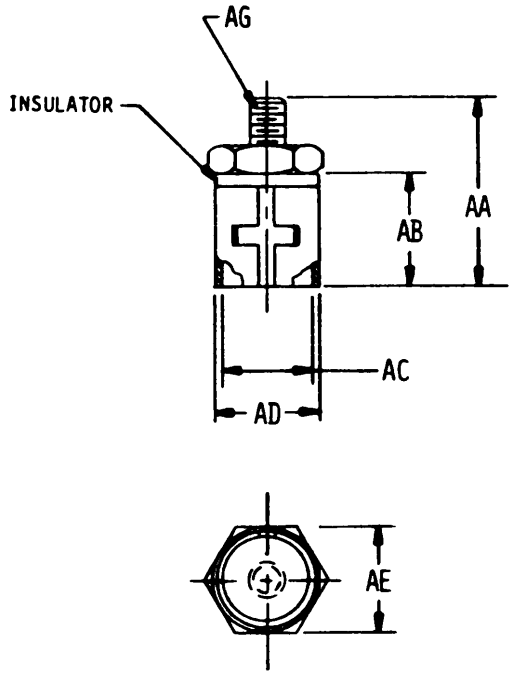

440-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1508	56	1698	26	2034	38
0102	10	1509	56	1700	34	2036	38
0103	10	1511	48	1702	34	2038	38
0104	10	1520	48	1704	34	2100	40
0105	10	1522	48	1706	34	2102	40
0107	12	1523	48	1706	34	2121	40
0108	12	1524	48	1710	34	2122	40
0700	10	1572	12	1712	36	2124	40
0800	10	1573	12	1720	36	2126	40
1003	10	1574	12	1722	36	2128	40
1004	10	1575	12	1724	36	2130	40
1005	10	1576	18	1800	30	2200	44
1006	10	1576	18	1802	30	2202	44
1008	10	1580	18	1804	32	2204	44
1009	14	1582	18	1806	32	2206	44
1371	46	1584	18	1820	32	2209	44
1372	50	1586	18	1822	32	2210	44
1373	48	1588	18	1824	32	2220	44
1376	48	1590	18	1826	32	2222	46
1 377	45	1600	30	1828	32	2300	50
1378	48	1602	30	1900	32	2302	50
1380	46	1604	30	1902	32	2328	50
1381	50	1606	30	1904	32	2322	50
1383	50	1620	30	1906	34	2400	54
1384	46	1622	30	1920	34	2450	42
1386	46	1624	30	1922	34	2452	44
1387	46	1626	30	1924	34	2454	44
1388	46	1652	24	1926	34	2504	56
1407	46	1654	24	1924	34	2609	60
1446	58	1656	24	2000	36	2602	60
1447	58	1658	24	2002	36	2620	60
1448	58	1660	24	2004	36	2622	60
1455	58	1663	24	2006	36	2700	50
1456	58	1664	24	2020	38	2702	50
1469	58	1665	24	2022	38	2704	52
1497	48	1682	24	2024	38	2706	52
1498	48	1684	24	2026	38	2708	52
1590	58	1688	24	2028	38	2710	52
1502	58	1694	24	2030	38	2712	52
1504	58	1696	26	2032	38	2714	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2716	52	4861	26	7046	20		
2718	52	4862	26	7050	22		
2720	52	4067	28	7051	22		
2730	52	4869	28	7311	56		
2732	54	4870	28	7315	56		
2734	54	4674	26	7316	56		
2914	56	4875	26	7319	56		
2916	56	4878	54	7320	56		
2918	56	4890	42	7348	20		
4685	58	4897	28	7349	20		
4686	58	4950	16	7400	22		
4703	56	5000	28	7401	22		
4708	60	6267	28	7572	14		
4709	60	6359	46	7576	14		
4717	28	6369	10	7577	14		
4765	54	6372	62	7580	16		
4766	54	6870	60	7629	62		
4770	54	6873	10	7630	62		
6771	54	6874	12				
4772	54	6941	14				
4782	54	6942	14				
4788	42	6943	20				
4791	42	6944	20				
6793	42	6945	20				
4795	42	6946	20				
4798	42	6991	62				
4799	42	6592	62				
4805	42	6993	62				
4815	42	6994	62				
4042	28	6995	62				
4844	28	7001	62				
4845	28	7002	62				
4846	28	7003	62				
4847	26	7004	62				
4848	28	7005	62				
4850	28	7021	22				
4853	42	7022	22				
4854	26	7023	22				
4855	26	7024	22				
4856	26	7045	20				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	62
Additional Requirements	62
Aperture Cards Required	12
Applicable Documents	64
Base Document	10
Capacitance	24
City, State, Zip	10
Classification	14
Company Name/Command	10
Confiauration	14
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Date	10
Design and Construction	18
Dielectric Withstanding Voltage at Sea LeveL	26
Electrical Contact (DC Resistance)	30
Engaging Force at High Temperature	30
Engaging Force at Low Temperature	32
Fatigue	34
Finishes	16
Format	10
Government Design Activity FSCM	10
Heat Dissipation (Thermal Resistance)	36
Heat Resistance	40
Humidity	42
Illustrations	16
Initial Engaging Force	44
Insulation Resistance	46
Materials	16
Metals	16
Mounting Hardware	60
Nomenclature	64
Notes	64

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Packaging	64
Part Marking	62
Part Number	12
Part Number Cross-Reference	64
Permeability	50
Phone Number	10
Quality Assurance Provisions	64
Rating	14
Requester FSCM	10
Requester's Name	10
Retention Strength	50
Revision of AEDPS Document (Number)	12
Salt Spray	54
Scope	12
Shock	56
Shock, Specified Pulse	56
Source Table	12
Street/Building	10
Superseded Document	64
System Application	10
Tabulated Characteristics	16
Units of Measure	12, 14
Vibration, High Frequency	58
Vibration Variable Frequency	60
Weight	20
Workmanship	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DoD STD 35-115

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:03Z
Check the source to verify that this is the current version before use.