FED. SUP CLASS
5305

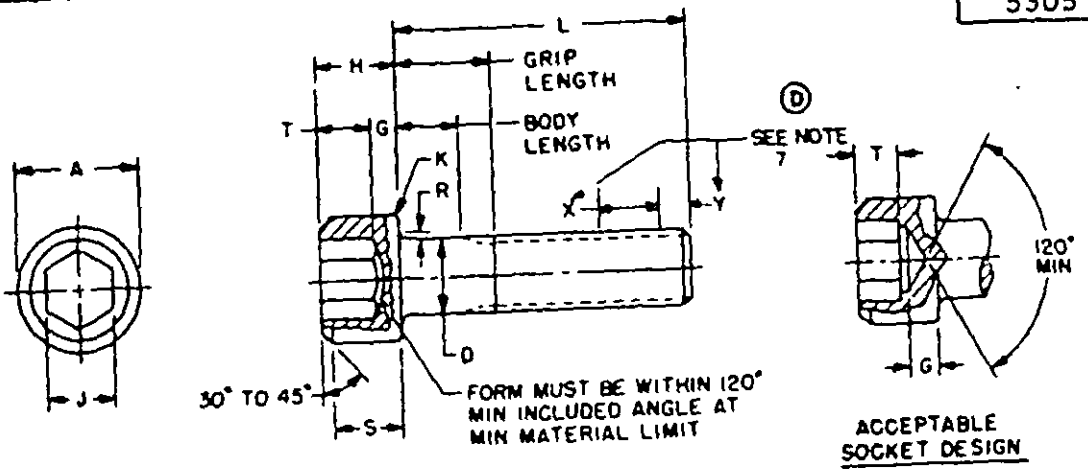


TABLE I

NOMINAL SIZE		(#2) .086	(#4) .112	(#6) .138	(#8) .164	(#10) .190	(1/4) .250
THREADS PER INCH UNC-3A		56	40	32	32	24	20
D BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500
	MIN	.0822	.1075	.1329	.1585	.1840	.2435
A HEAD DIAMETER	MAX	.140	.183	.226	.270	.3125	.375
	MIN	.134	.176	.218	.262	.303	.365
H HEAD HEIGHT	MAX	.086	.112	.138	.164	.190	.250
	MIN	.083	.108	.134	.159	.185	.244
S HEAD SIDE NOT	MIN	.077	.101	.124	.148	.171	.225
J SOCKET WIDTH ACROSS FLATS	MAX	.0791	.0952	.1111	.1426	.1587	.1900
	MIN	.0761	.0937	.1094	.1406	.1562	.1875
T KEY ENGAGEMENT	MIN	.038	.051	.064	.077	.090	.120
C WALL THICKNESS	MIN	.029	.038	.047	.056	.065	.095
CHAMFER OR R RADIUS	MAX	.003	.005	.005	.005	.005	.006
R FILLET EXTENSION	MAX	.006	.008	.010	.012	.014	.014
	MIN	.004	.005	.006	.007	.009	.009
* TENSILE STRENGTH LBS - MIN		560	920	1,400	2,170	2,710	4,950

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
.188 .250 .375 .500 .625 .750 .875 1.000	+.000 -.031	1 2 3 4	9 10 11 12 13	18 19 20 21 22 23 24	30 31 32 33 34 35 36			43 44 45 46 47 48			57 58 59 60 61 62		
1.250 1.500 1.750 2.000 2.250 2.500	+.000 -.040				37 38	.375 .375	.219 .219	49 50 51 52	.375 .375 .375 .375	.167 .167 .667 .667	63 64 65 66 67 68 69 70	.500 .500 1.000 1.000 1.500 1.500 2.000	.250 .250 .750 1.250 1.250 1.250
2.750 3.000	+.000 -.060												

For notes see sheet 3.

(B) For changes see sheets 1 thru 7.

REVISED (A) 21 FEB 1963 (B) 25 MAR 1965 (C) 22 OCT 1970 (D) 31 DEC 1976

APPROVED 5 APR 1962

REVIEWER: AT, AV, CA, IS, MI, MU, NSA, OS
USER: ME, PA, WV, YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. DC Other Cust AS 99	TITLE (D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A	MILITARY STANDARD MS16997
PROCUREMENT SPECIFICATION FF-S-86	SUPERSEDES BCW31, 3.1, 3.2; BCW32, 2.1, 2.2; BCW33.1, and 3.4; MS15455, MS35457 and MS35459 in part	SHEET 1 OF 7

DD FORM 672-1 (Continued)

5305-1183

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE I (Cont'd)

NOMINAL SIZE		(5/16) .3125	(3/8) .375	(7/16) .4375	(1/2) .500
THREADS PER INCH UNC-3A		18	16	14	13
D BODY DIAMETER	MAX	.3125	.3750	.4375	.5000
	MIN	.3053	.3678	.4294	.4919
A HEAD DIAMETER	MAX	.4050	.5625	.6562	.750
	MIN	.457	.550	.642	.735
H HEAD HEIGHT	MAX	.3125	.375	.4375	.500
	MIN	.306	.365	.430	.492
S HEAD SIDE HGT	MIN	.291	.337	.394	.450
J SOCKET WIDTH ACROSS FLATS	MAX	.2550	.3160	.3790	.3790
	MIN	.2500	.3125	.3750	.3750
T KEY ENGAGEMENT	MIN	.151	.182	.213	.245
G WALL THICKNESS	MIN	.119	.143	.166	.190
R CHAMFER OR RADIUS	MAX	.008	.008	.010	.010
K FILLET EXTENSION	MAX	.017	.020	.023	.026
	MIN	.012	.015	.018	.020
• TENSILE STRENGTH LBS - MIN		6,190	12,100	16,700	22,300

L LENGTH	TOLERANCE SIZE .375 & UNDER	TOLERANCE OVER .375	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	(D)** DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
.375			75			95			117			137		
.500			76			96			118			138		
.625	+.000 -.031	+.000 -.031	77											
.750			78			97			119			139		
.875			79			98			120			140		
1.000			80			99			121			141		
1.250			81			100			122			142		
1.500			82			101			123			143		
1.750	+.000	+.000	83	.625	.347	102	.500	.187	124			144		
2.000	-.040	-.060	84	.625	.347	103	.500	.187	125	.625	.268	145		
2.250			85	1.125	.647	104	1.000	.687	126	.625	.268	146	.750	.365
2.500			86	1.125	.647	105	1.000	.687	127	1.125	.768	147	.750	.365
2.750			87	1.625	1.347	106	1.500	1.187	128	1.125	.768	148	.750	.365
3.000			88	1.625	1.347	107	1.500	1.187	129	1.625	1.268	149	1.500	1.115
3.250			89	2.125	1.847	108	2.000	1.687	130	1.625	1.268	150	1.500	1.115
3.500			90	2.125	1.847	109	2.000	1.687	131	2.125	1.768	151	1.500	1.115
4.000	+.000	+.000				110	2.500	2.187	132	2.625	2.268	152	2.250	1.865
4.500	-.060	-.080				111	3.000	2.687				153	3.000	2.615
5.000						112	3.500	3.187				154	3.000	2.615
5.500												155	3.750	3.365
6.000												156	4.500	4.115
6.500	+.000	+.000										157	4.500	4.115
7.000	-.120	-.120										158	5.250	4.865
8.000												159	6.000	5.615

For notes see sheet 3.

(D)** INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1976.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

DIVIEMTP, AT, AV, LA, IS, MI, MU, NSA, OS USER: NE, PA, WV, YD

APPROVED 3 APR 1962 REVISED (D) for changes see sheets 1 thru 7

PA VC	TITLE (D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A	MILITARY STANDARD
Other Cust AS 99		MS16997
PROCUREMENT SPECIFICATION FF-S-86	SUPERSEDES BCW21, 1.1, 1.2; BCW22, 2.1, 2.2; BCW23.3, and 3.4; MS35455, MS35457 and MS35459 in part	SHEET 2 OF 7

DD FORM 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE I (Cont'd)

NOMINAL SIZE		(5/8) .625	(3/4) .750	(7/8) .875	(1) 1.000
THREADS PER INCH UNC-3A		11	10	9	8
D BODY DIAMETER	MAX	.6250	.7500	.8750	1.0000
	MIN	.6163	.7406	.8647	.9886
A HEAD DIAMETER	MAX	.9375	1.125	1.3125	1.500
	MIN	.921	1.107	1.291	1.479
H HEAD HEIGHT	MAX	.625	.750	.875	1.000
	MIN	.616	.740	.864	.988
S HEAD SIDE HGT	MIN	.562	.675	.787	.900
J SOCKET WIDTH ACROSS FLATS	MAX	.5050	.6310	.7570	.7570
	MIN	.5000	.6250	.7500	.7500
T KEY ENGAGEMENT	MIN	.307	.370	.432	.495
C WALL THICKNESS	MIN	.238	.285	.333	.380
K CHAMFER OR RADIUS	MAX	.010	.010	.015	.015
R FILLET EXTENSION	MAX	.032	.039	.044	.050
	MIN	.024	.030	.034	.040
* TENSILE STRENGTH LBS - MIN		35,600	52,600	73,000	95,500

L LENGTH	TOLERANCE SIZE .750 & UNDER	TOLERANCE OVER .750	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	(D)** DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
1.000	-.031	-.050	164											
1.250			165			187								
1.500			166			188								
1.750	+.000	+.000	167			189						226		
2.000	-.060	-.100	168			190			209					
2.250			169			191			210			229		
2.500			170	.750	.295	192			211			230		
2.750			171	.750	.295	193			212			231		
3.000			172	.750	.295	194	1.000	.500	213			232		
3.250			173	1.500	1.045	195	1.000	.500	214	1.000	.444	233		
3.500	+.000	+.000	174	1.500	1.045	196	1.000	.500	215	1.000	.444	234	1.000	.375
4.000	-.080	-.140	175	2.250	1.795	197	2.000	1.500	216	1.000	.444	235	1.000	.375
4.500			176	2.250	1.795	198	2.000	1.500	217	2.000	1.444	236	2.000	1.375
5.000			177	3.000	2.545	199	3.000	2.500	218	2.000	1.444	237	2.000	1.375
5.500			178	3.750	3.295	200	3.000	2.500	219	3.000	2.444	238	3.000	2.375
6.000			179	3.750	3.295	201	4.000	3.500	220	3.000	2.444	239	3.000	2.375
6.500	+.000	+.000	180	4.500	4.045	202	4.000	3.500	221	4.000	3.444	240	4.000	3.375
7.000	-.120	-.200	181	5.250	4.795	203	5.000	4.500	222	4.000	3.444	241	4.000	3.375
8.000			182	6.000	5.545	204	6.000	5.500	223	5.000	4.444	242	5.000	4.375

NOTES:

1. MATERIAL: Alloy steel in accordance with procurement specification.
2. PROTECTIVE COATING: Cadmium plating in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with procurement specification.
4. THREAD LENGTH: Screws above heavy line, for sizes #2 thru 5/8, inclusive, shall have complete (full form) threads extending within two threads of the head as measured with a thread ring gauge, and for sizes larger that 5/8 shall have complete threads extending as close to the head as practicable.
5. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
6. HEAD: The head may or may not be knurled at the manufacturer's option. Type of knurling optional.
(D) 7. SELF-LOCKING ELEMENT: (a) The self-locking element shall be a patch type or longitudinal strip in accordance with MIL-F-18240.
(b) For "E" and "Y" dimensions, design and usage limitations, see MS15981.
(c) Maximum ring gage diameter that the locking region of screw must pass thru freely or with finger pressure shall be the nominal size plus 0.010.
*8. TENSILE STRENGTH: Based on 160,000 PSI minimum ultimate tensile strength. Load pounds are calculated by the stress areas indicated in the Screw-Thread Standards for Federal Services, Handbook H28.
(D) 9. PART NUMBER: The MS part number consists of the MS number, plus the dash number. For screws with self-locking element add the letter "L" after the dash number.
Example: MS16997-1 Plain screw
MS16997-1L Self-locking screw
10. Referenced documents shall be of the issue in effect on date of invitations for bid.
11. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(D) ** INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1976.

APPROVED 5 APR 1962 REVISED (D) for changes see sheets 1 thru 7

MILITARY STANDARD

P A	WC
Other Cogs	AS 99

TITLE

(D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A

MS16997

PROCUREMENT SPECIFICATION	SUPERSEDES
FF-S-86	BCWX1, 1.1, 1.2; BCWX2, 2.1, 2.2; BCWX3.3, and 3.4; MS35455, MS35457 and MS35459 in part

SHEET 3 OF 7

DD FORM 672-1 (Revised coordination)

REVIEWER: AT, AV, SA, 15, MI, MU, NSA, OS
USER: ME, PA, MY, TD

Military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE II
INTERCHANGEABILITY TABLE

The screws covered by dash numbers given in MS35455, MS35457 and MS35459 that are replaced by applicable dash numbers in this document are cancelled after 5 April 62. Use the dash numbers given in the preceding sheets. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for design and replacement. Replacement shall be in accordance with this table. Interchangeability information regarding part numbers on superseded drawings are also contained in this table.

PART NUMBERS		PART NUMBERS		PART NUMBERS	
CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING
MS35455 MS35457 MS35459	MS16997	MS35455 MS35457 MS35459	MS16997	MS35455 MS35457 MS35459	MS16997
Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1	9	31	52	77	110
2	10	32	57	78	111
3	11	33	58	79	112
4	12	34	59	98	137
5	13	35	60	99	138
6	18	36	61	100	139
7	19	37	62	101	140
8	20	38	63	102	141
9	21	39	64	103	142
10	22	40	65	104	143
11	23	41	66	105	144
12	24	42	67	106	145
13	30	43	68	107	146
14	31	44	69	108	147
15	32	45	70	109	148
16	33	62	95	110	149
17	34	63	96	111	150
18	35	64	97	112	151
19	36	65	98	113	152
20	37	66	99	114	153
21	38	67	100	115	154
22	43	68	101	116	155
23	44	69	102	117	156
24	45	70	103		
25	46	71	104		
26	47	72	105		
27	48	73	106		
28	49	74	107		
29	50	75	108		
30	51	76	109		

Screws covered by the following part numbers are inactive for Design and Engineering. They shall be used for maintenance of existing equipment to replace the 5/16, 7/16, 5/8, 3/4, 7/8 and 1 inch size screws used in counterbored holes or other close applications.

PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.
INACTIVE	INACTIVE	INACTIVE	INACTIVE	INACTIVE	INACTIVE	INACTIVE
MS35455 MS35457 MS35459	MS35455 MS35457 MS35459	MS35455 MS35457 MS35459	MS35455 MS35457 MS35459	MS35455 MS35457 MS35459	MS35455 MS35457 MS35459	MS35455 MS35457 MS35459
Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
46	59	90	125	138	151	164
47	60	91	126	139	152	165
48	61	92	127	140	153	166
49	80	93	128	141	154	167
50	83	94	129	142	155	168
51	84	95	130	143	156	169
52	85	114	131	144	157	170
53	86	119	132	145	158	171
54	87	120	133	146	159	172
55	88	121	134	147	160	
56	89	122	135	148	161	
57	90	123	136	149	162	
58	91	124	137	150	163	

APPROVED 5 APRIL 62 REVISED (D) for changes see sheets 3 thru 7

REVIEWER: AT, AV, LA, IS, MI, MU, NSA, OS
USER: ME, PA, SY, TD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.	WC
Other Govt	AS
	99

TITLE

(D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A

MILITARY STANDARD

MS 16997

PROCUREMENT SPECIFICATION FF-S-96

SUPERSEDES: BCW11, 1.1, 1.2; BCW12, 2.1, 2.2; BCW13.3, and 1.4, MS35455, MS35457 and MS35459 in part

SHEET 4 OF 7

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

REVIEWER: AT, AV, CA, IS, MI, MU, NSA, OS
USER: MR, PA, SH, YD

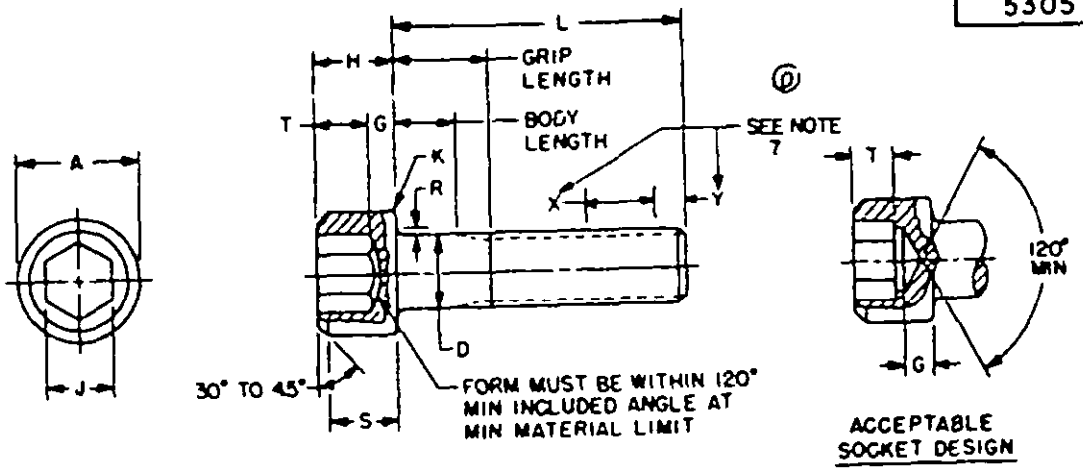


TABLE III
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE mm		2.184	2.845	3.505	4.166	4.826	6.350
THREADS per 25.4mm UNC-3A		56	40	32	32	24	20
D BODY DIAMETER	MAX	2.184	2.845	3.505	4.166	4.826	6.350
	MIN	2.088	2.730	3.376	4.026	4.674	6.185
A HEAD DIAMETER	MAX	3.556	4.648	5.740	6.858	7.938	9.525
	MIN	3.404	4.470	5.537	6.655	7.696	9.271
H HEAD HEIGHT	MAX	2.184	2.845	3.505	4.166	4.826	6.350
	MIN	2.108	2.743	3.404	4.039	4.699	6.198
S HEAD SIDE NOT	MIN	1.956	2.565	3.150	3.759	4.343	5.715
J SOCKET WIDTH ACROSS FLATS	MAX	2.009	2.418	2.822	3.622	4.031	4.826
	MIN	1.984	2.380	2.779	3.571	3.967	4.762
T KEY ENGAGEMENT	MIN	.965	1.295	1.626	1.956	2.286	3.048
G WALL THICKNESS	MIN	.737	.965	1.194	1.422	1.651	2.413
R CHAMFER OR RADIUS	MAX	.076	.127	.127	.127	.127	.203
R FILLET EXTENSION	MAX	.203	.229	.254	.305	.356	.356
	MIN	.102	.127	.152	.179	.229	.229
* TENSILE STRENGTH kN - MIN (D)		2.520	4.140	6.300	9.765	12.195	22.275

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
4.775 6.350 9.525 12.700 15.875 19.050 22.225 25.400	+.000 -.787	1 2 3 4	9 10 11 12 13	18 19 20 21 22 23 24	30 31 32 33 34 35 36			43 44 45 46 47 48			57 58 59 60 61 62 63		
31.750 38.100 44.450 50.800 57.150 63.500	+.000 -1.016				37 38	9.525 9.525	5.563 5.563	49 50 51 52	9.525 9.525 22.225 22.225	4.242 4.242 16.942 16.942	64 65 66 67 68 69 70	12.700 12.700 25.400 25.400 38.100 38.100 50.800	6.350 6.350 19.050 19.050 31.750 31.750 44.450
69.850 76.200	+.000 -1.524												

NOTE: All dimensions are in millimeters (mm) unless otherwise specified and are based on an approximate conversion factor of 25.4mm equal one inch.

APPROVED 5 APR 1982 REVISED (D) for changes see sheets 1 thru 7

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. MC Other Cust AS 99	TITLE (D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A	MILITARY STANDARD MS16997
PROCUREMENT SPECIFICATION FF-S-86	SUPERSEDES BUWEI, 1.1, 1.2; NAVAIR, 2.1, 2.2; BUWEI 1.3, and 1.4; MS35455, MS15457 and MS15459 IN PART	SHEET 1 OF 7

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE III (Cont'd)
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE mm		7.936	9.525	11.112	12.700
THREAD per 25.4mm UNC-3A		18	16	14	13
D BODY DIAMETER	MAX	7.936	9.525	11.112	12.700
	MIN	7.755	9.342	10.907	12.494
A HEAD DIAMETER	MAX	11.908	14.288	16.667	19.050
	MIN	11.606	13.970	16.307	18.669
H HEAD HEIGHT	MAX	7.936	9.525	11.112	12.700
	MIN	7.772	9.347	10.922	12.497
S HEAD SIDE HGT	MIN	7.137	8.560	10.008	11.430
J SOCKET WIDTH ACROSS FLATS	MAX	6.426	8.026	9.627	9.627
	MIN	6.350	7.936	9.525	9.525
T KEY ENGAGEMENT	MIN	3.835	4.623	5.410	6.223
G WALL THICKNESS	MIN	3.023	3.632	4.216	4.826
R CHAMFER OR RADIUS	MAX	.203	.203	.254	.254
R FILLET EXTENSION	MAX	.432	.508	.584	.660
	MIN	.305	.381	.457	.508
* TENSILE STRENGTH kN - MIN (D)		36.855	54.450	75.150	100.350

L LENGTH	TOLERANCE SIZE 9.525 & UNDER	TOLERANCE OVER 9.525	DASH NO.	GRIP LENGTH MAX	GRIP LENGTH MIN	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	(D) ** DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
9.525			75				95			117			137		
12.700			76				96			118			138		
15.875	+.000	+.000	77												
	-.787	-.787					97			119			139		
19.050			78				98			120			140		
22.225			79				99			121			141		
25.400			80												
							100			122			142		
31.750			81				101			123			143		
38.100			82				102			124			144		
44.450	+.000	+.000	83	15.875	8.814		102	12.700	4.750	125	15.875	6.807	145		
50.800	-1.016	-1.524	84	15.875	8.814		103	12.700	4.750						
													146	19.050	9.271
57.150			85	28.575	21.514		104	25.400	17.450	126	15.875	6.807	147	19.050	9.271
63.500			86	28.575	21.514		105	25.400	17.450	127	28.575	19.507	148	19.050	9.271
69.850			87	41.275	34.214		106	38.100	30.150	128	28.575	19.507	149	38.100	28.321
76.200			88	41.275	34.214		107	38.100	30.150	129	41.275	32.207			
													150	38.100	28.321
82.550			89	53.975	46.914		108	50.800	42.850	130	41.275	32.207	151	38.100	28.321
88.900			90	53.975	46.914		109	50.800	42.850	131	53.975	44.907	152	57.150	47.371
101.600	+.000	+.000					110	63.500	55.550	132	66.675	57.607	153	76.200	66.421
114.300	-1.524	-2.032					111	76.200	68.250						
													154	76.200	66.421
127.000							112	88.900	80.950				155	95.250	85.471
139.700													156	114.300	104.521
152.400															
													157	114.300	104.521
165.100													158	133.350	123.571
177.800	+.000	+.000											159	152.400	142.621
203.200	-3.048	-3.048													

NOTE: All dimensions are in millimeters (mm), unless otherwise specified and are based on an approximate conversion factor of 25.4mm equal one inch.

(D) ** INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1976.

APPROVED 5 APR 1982 REVISED (D) for changes see sheets 1 thru 7

REVIEWER: AT, AV, EA, IS, MI, MU, NSA, 05
USER: ME, PA, WY, YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. MC Other Cust AS 99	TITLE (D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A	MILITARY STANDARD MS16997	
PROCUREMENT SPECIFICATION FF-S-86	SUPERSEDES BCW1, 1.1, 1.2, BCW12, 2.1, 2.2; BCW13.3, and 3.4; MS35455, MS35457 and MS35459 in part	SHEET 6 OF 7	

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

TABLE III (Cont'd)
METRIC TRANSLATION OF TABLE I

FED SUP CLASS 5305

NOMINAL SIZE mm		15.875	19.050	22.225	25.400
THREADS per 25.4 mm UNC-3A		11	10	9	8
D BODY DIAMETER	MAX	15.875	19.050	22.225	25.400
	MIN	15.654	18.831	21.963	25.110
A HEAD DIAMETER	MAX	23.812	28.575	33.338	38.100
	MIN	23.393	28.118	32.842	37.567
H HEAD HEIGHT	MAX	15.875	19.050	22.225	25.400
	MIN	15.646	18.796	21.946	25.095
S HEAD SIDE HGT	MIN	14.275	17.145	19.990	22.860
J SOCKET WIDTH ACROSS FLATS	MAX	12.827	16.027	19.228	19.228
	MIN	12.700	15.875	19.050	19.050
T KEY ENGAGEMENT	MIN	7.798	9.398	10.973	12.573
C WALL THICKNESS	MIN	6.045	7.239	8.458	9.652
K CHAMFER OR RADIUS	MAX	.254	.254	.381	.381
R FILLET	MAX	.813	.991	1.115	1.270
ENTENSION	MIN	.610	.762	.564	1.016
* TENSILE STRENGTH KN - MIN (D)		160.200	237.600	328.500	431.100

L LENGTH	TOLERANCE SIZE 19.050 & UNDER	TOLERANCE OVER 19.050	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	(D)** DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO.	GRIP LENGTH MAX	BODY LENGTH MIN
25.400	-.787	-1.270	164											
31.750			165			187								
38.100			166			188								
44.450			167			189								
50.800	+.000	+.000	168			190			209			228		
	-1.524	-2.540												
57.150			169			191			210			229		
63.500			170	19.050	7.493	192			211			230		
69.850			171	19.050	7.493	193			212			231		
76.200			172	19.050	7.493	194	25.400	12.700	213			232		
82.550			173	38.100	26.543	195	25.400	12.700	214	25.400	11.278	233	25.400	9.525
88.900			174	38.100	26.543	196	25.400	12.700	215	25.400	11.278	234	25.400	9.525
101.600	+.000	+.000	175	57.150	45.593	197	50.800	38.100	216	25.400	11.278	235	25.400	9.525
114.300	-2.032	-3.556	176	57.150	45.593	198	50.800	38.100	217	50.800	36.678	236	50.800	34.925
127.000			177	76.200	64.643	199	76.200	63.500	218	50.800	36.678	237	50.800	34.925
139.700			178	95.250	83.693	200	76.200	63.500	219	76.200	62.078	238	76.200	60.325
152.400			179	95.250	83.693	201	101.600	88.900	220	76.200	62.078	239	76.200	60.325
165.100			180	114.300	102.743	202	101.600	88.900	221	101.600	87.478	240	101.600	85.725
177.800	+.000	+.000	181	133.350	121.793	203	127.000	114.300	222	101.600	87.478	241	101.600	85.725
203.200	-3.048	-5.080	182	152.400	140.843	204	152.400	139.700	223	127.000	112.878	242	127.000	111.125

NOTE: All dimensions are in millimeters (mm), unless otherwise specified and are based on an approximate conversion factor of 25.4 mm equal one inch.

(D) ** INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1976.

REVIEWER: AT, AV, EA, IS, MI, MO, MSA, OS
USER: ME, PA, WV, TD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 5 APR 1962 REVISED (D) For changes see sheets 1 thru 7

P.A.	MC	TITLE (D) SCREW,CAP,SOCKET HEAD AND SCREW,CAP,SOCKET HEAD,SELF-LOCKING: ALLOY STEEL,CADMIUM PLATED,UNC-3A	MILITARY STANDARD
Other Cust	AS 99		MS16997
PROCUREMENT SPECIFICATION FF-S-86		SUPERSEDES BCW11, 1.1, 1.2; BCW12, 2.1, 2.2; BCW13.3 and 3.4, MS35455, MS35457 and MS35459 in part.	SHEET 7 OF 7

DD FORM 672-1

☆ U. S. GOVERNMENT PRINTING OFFICE 1977-703-020/1078

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.