FED. SUP CLASS
2925

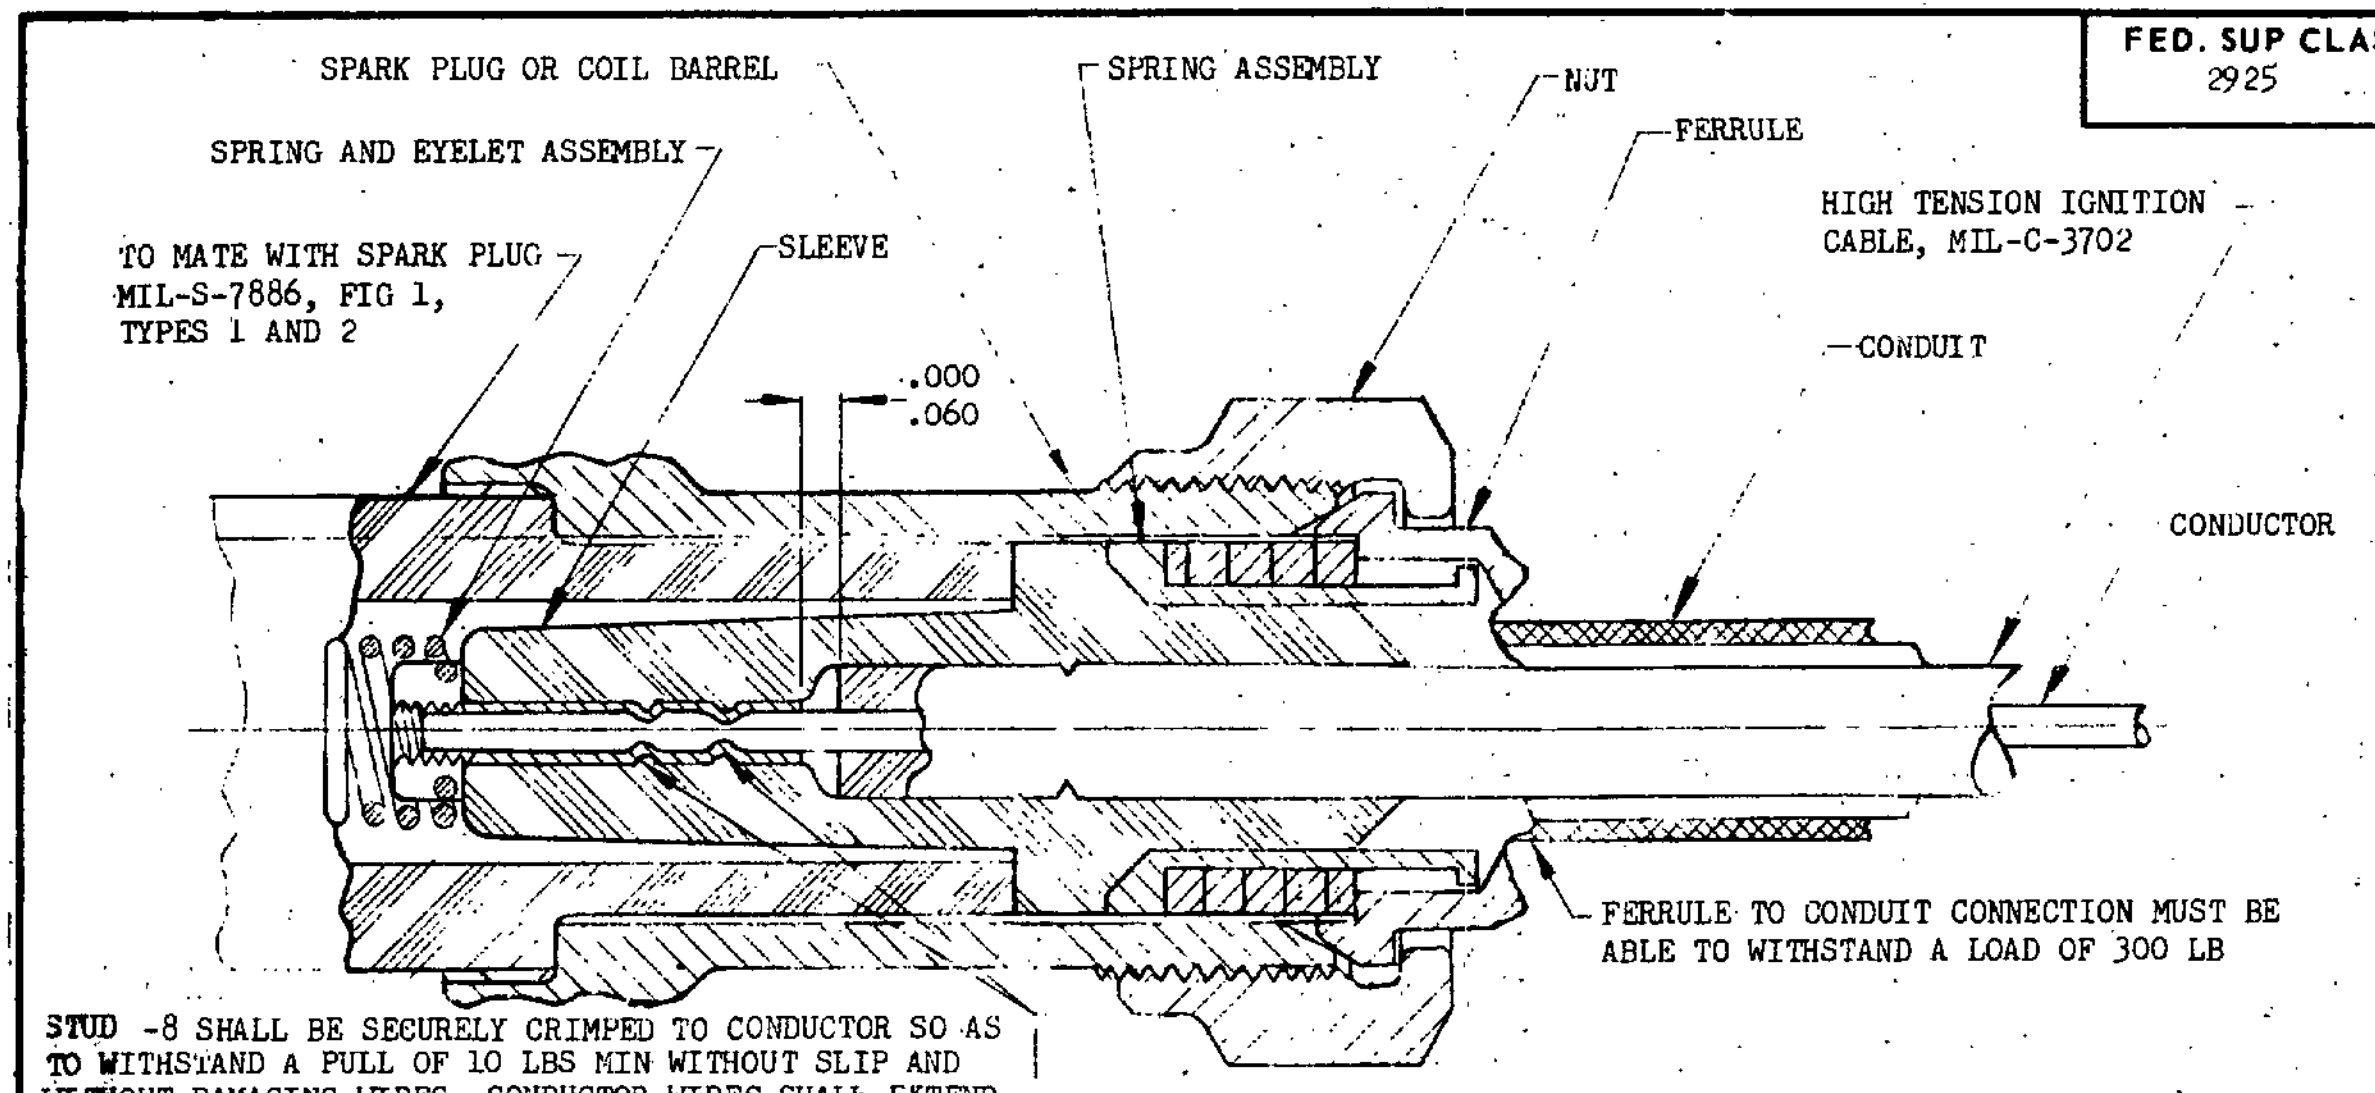
SPARK PLUG OR COIL BARREL
SPRING ASSEMBLY
NUT
FERRULE
SPRING AND EYELET ASSEMBLY
TO MATE WITH SPARK PLUG MIL-S-7886, FIG 1, TYPES 1 AND 2
SLEEVE
HIGH TENSION IGNITION CABLE, MIL-C-3702
CONDUIT
.000
.060
CONDUCTOR
FERRULE TO CONDUIT CONNECTION MUST BE ABLE TO WITHSTAND A LOAD OF 300 LB

STUD -8 SHALL BE SECURELY CRIMPED TO CONDUCTOR SO AS TO WITHSTAND A PULL OF 10 LBS MIN WITHOUT SLIP AND WITHOUT DAMAGING WIRES. CONDUCTOR WIRES SHALL EXTEND THRU STUD AND BE VISIBLE AT OUTER END, BUT TERMINATE INSIDE TO WITHIN +0, -.062

TERMINAL ASSEMBLY -1

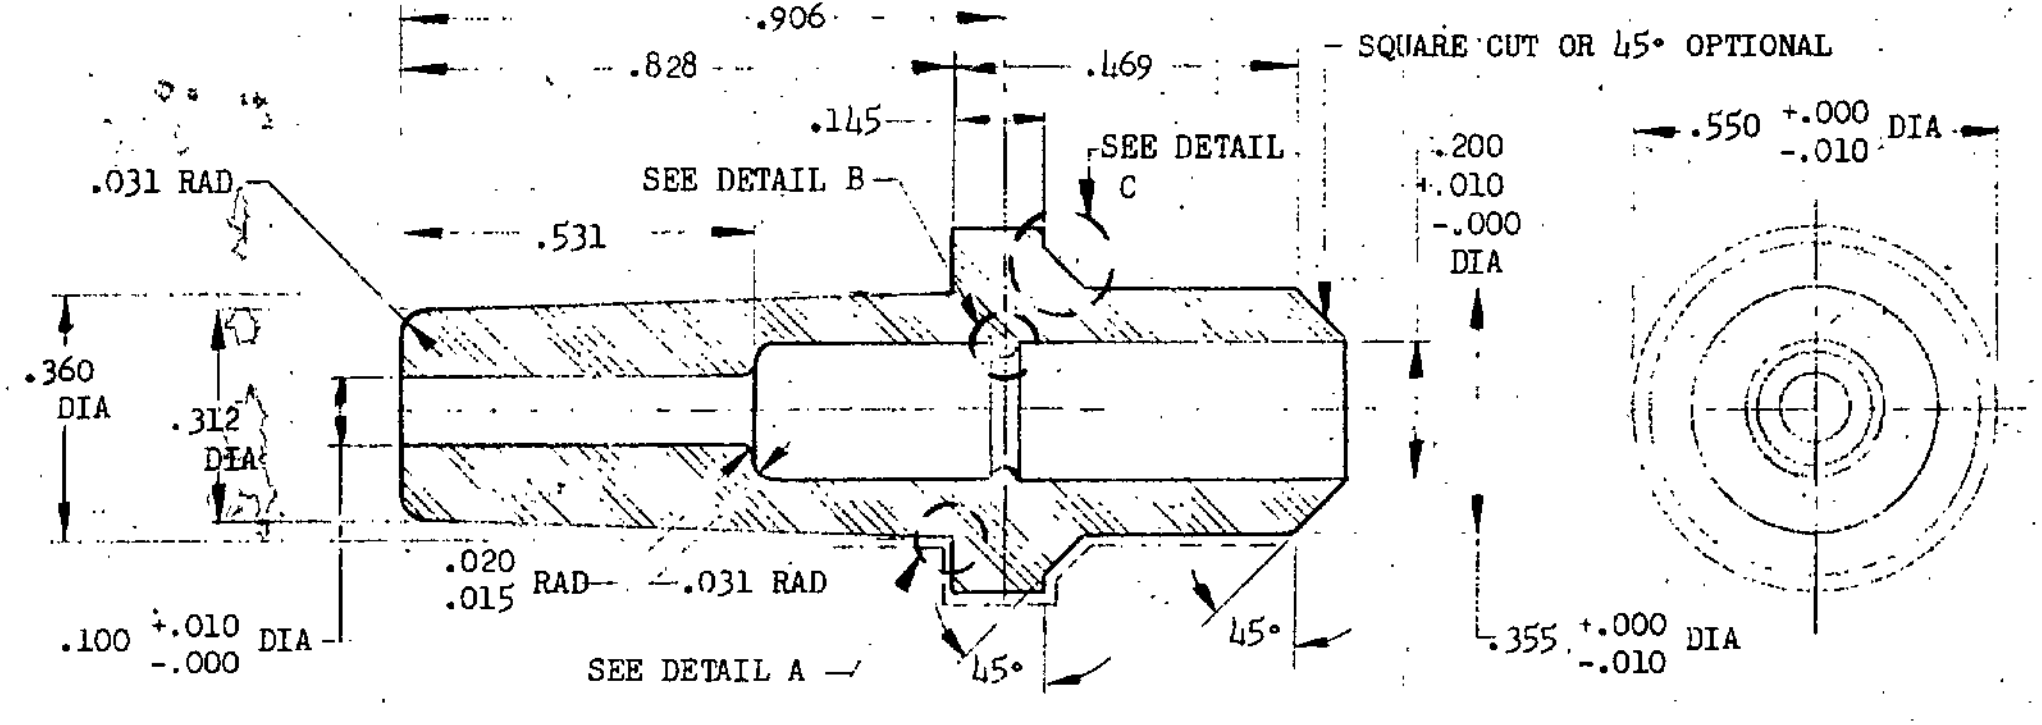

SLEEVE -4

MATERIAL: SILICONE RUBBER, MIL-R-5847, GR 80, CLASS II OR EQUIVALENT. ALL CORNERS TO BE .020 - .005 RADIUS UNLESS OTHERWISE SPECIFIED. APPLY 8 KV (RMS) BETWEEN ID AND SURFACE INDICATED BY DASH LINE FOR 5 SECONDS.



DETAIL A
ENLARGED

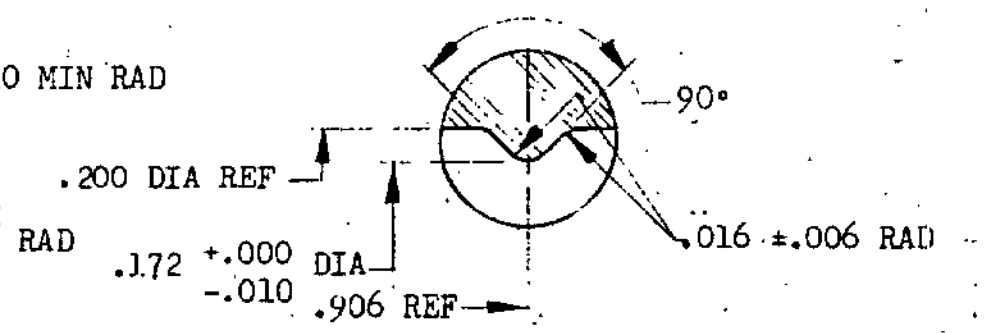

DETAIL B
ENLARGED



DETAIL C
ENLARGED

TERMINAL ASSEMBLY DASH NO.	SPRING ASSEMBLY (A) (a)	SLEEVE	SPRING AND EYELET ASSEMBLY	NUT	STUD
-1	-3	-4	-6	-7	-8
-2	NONE	-5	-6	-7	-8

(A) (a) THE GOVERNMENT DOES NOT HAVE A ROYALTY FREE LICENSE UNDER U.S.PATENT 2,759,989 WHICH EXPIRES 21 AUGUST 1973.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) FOR CHANGES SEE SHEET 1.

APPROVED 27 Dec 63 REVISED (A) 10 Aug 65

USER:
Army - MO
Navy - WP
USAF - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - WP
Other Cust
Army - MO
USAF - 82

TITLE
TERMINAL ASSEMBLY, SPARK PLUG, DETACHABLE IGNITION LEAD

MILITARY STANDARD
MS21267

PROCUREMENT SPECIFICATION
MIL-L-19844

SUPERSEDES: AN4164

SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2925-0014

FED. SUP CLASS
2925

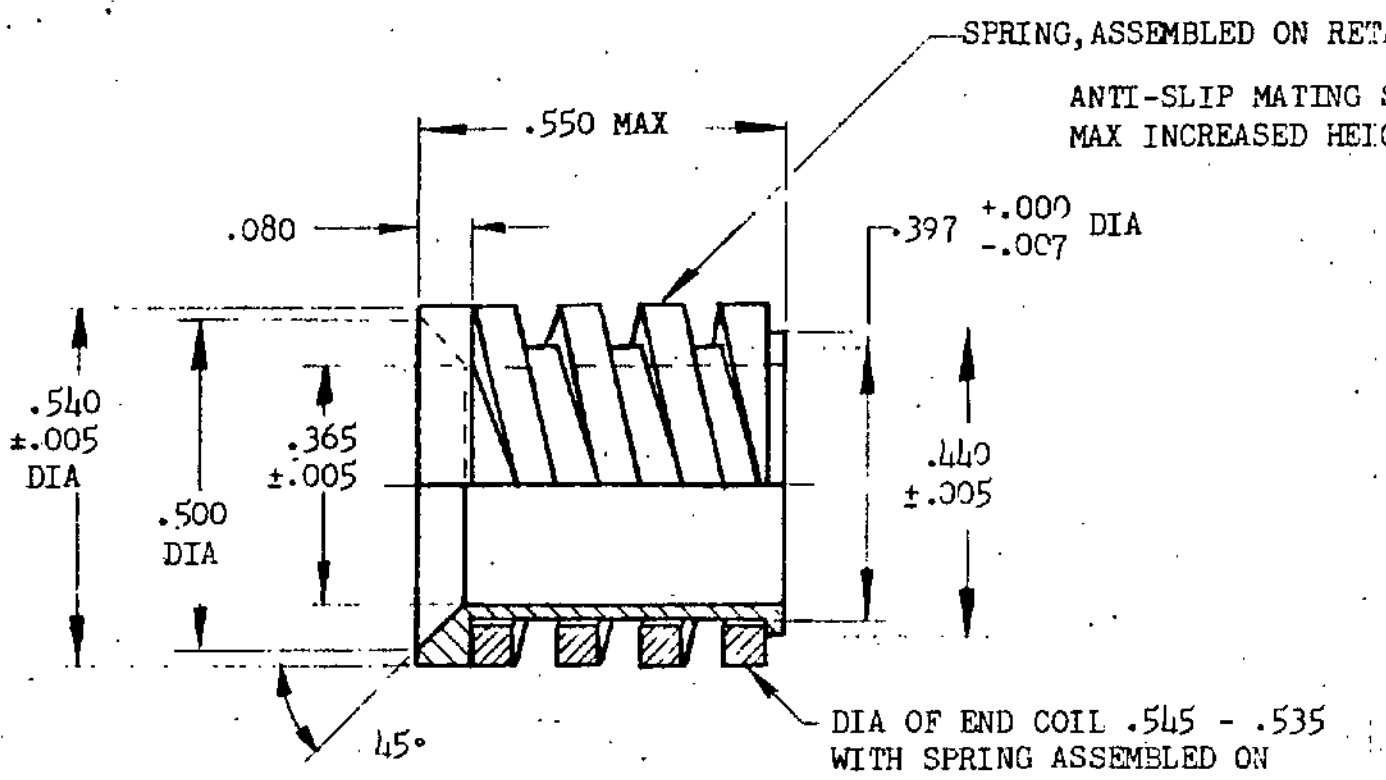
SPRING, ASSEMBLED ON RETAINER
.550 MAX
.080
.397 +.000 -.007 DIA
.540 ±.005 DIA
.500 DIA
.365 ±.005
.440 ±.005
45°
DIA OF END COIL .545 - .535 WITH SPRING ASSEMBLED ON RETAINER

SPRING ASSEMBLY
-3

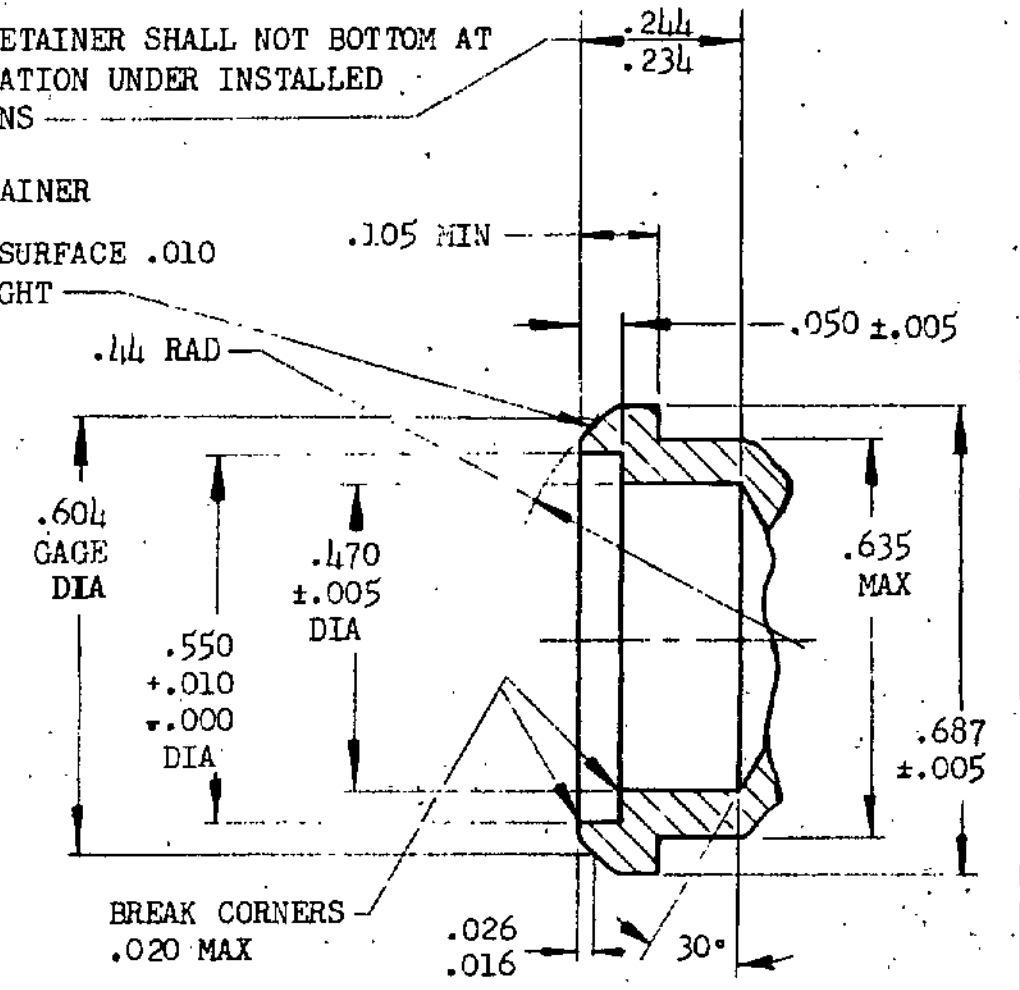

FERRULE
MATERIAL: CRES, MIL-S-7720, TYPE 303.

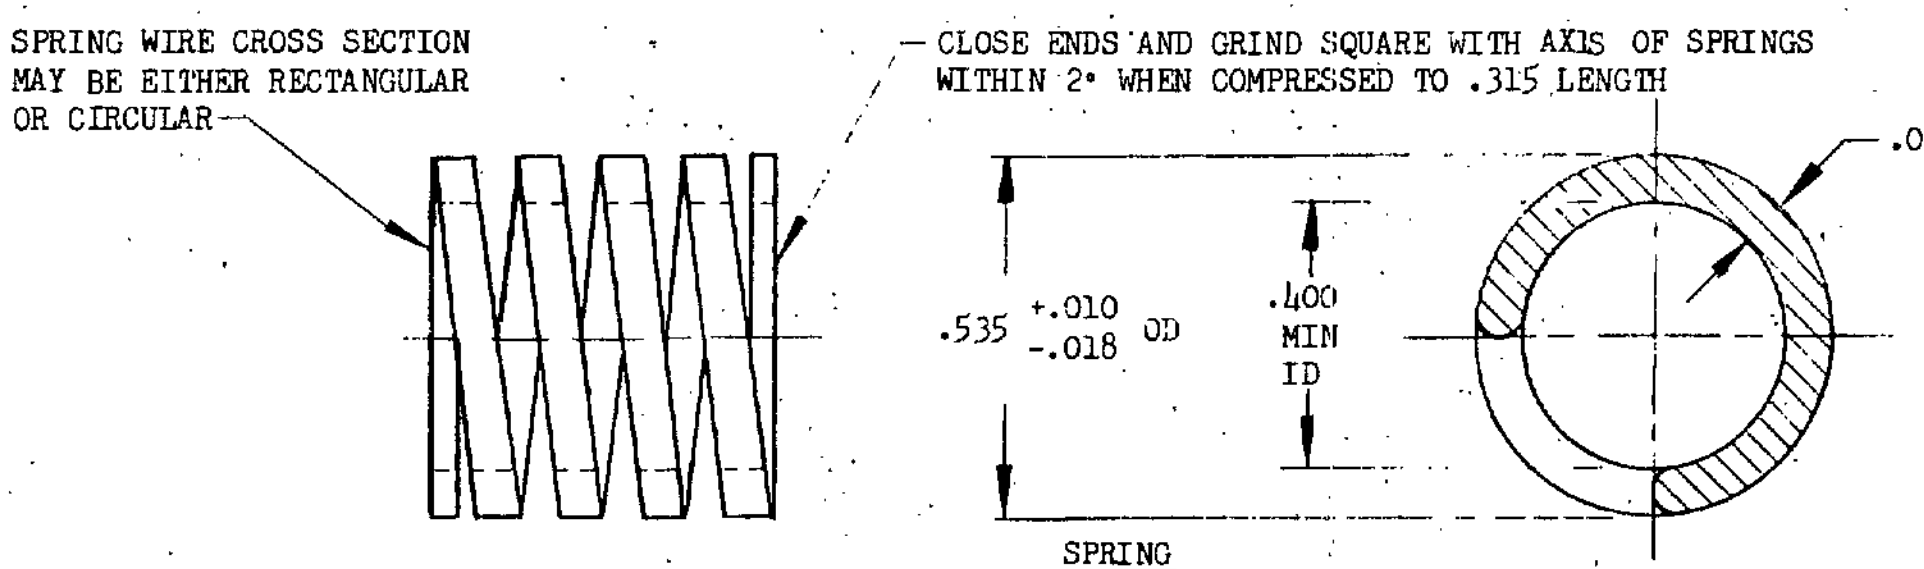
SPRING WIRE CROSS SECTION MAY BE EITHER RECTANGULAR OR CIRCULAR
CLOSE ENDS AND GRIND SQUARE WITH AXIS OF SPRINGS WITHIN 2° WHEN COMPRESSED TO .315 LENGTH
.063 +.000 -.004
.535 +.010 -.018 OD
.400 MIN ID

SPRING

(b) MATERIAL: SPRING, QQ-W-470 OR QQ-W-423, COMPOSITION 302 OR 304, CONDITION B.
RETAINER, CRES, BAR, MIL-S-7720, TYPE 303, CONDITION A.
FINISH: SPRING, CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2.
SURFACE FINISH: RETAINER, 63 RHR ALL OVER, MIL-STD-10.
GROUND END SURFACES OF ALL SPRINGS SHALL EXTEND NOT LESS THAN 270° OVER CIRCUMFERENCE OF END COILS.
SPRINGS SHALL NOT TAKE A PERMANENT SET WHEN COMPRESSED SOLID. LENGTH UNDER 25 LB LOAD SHALL BE .335 - .295.

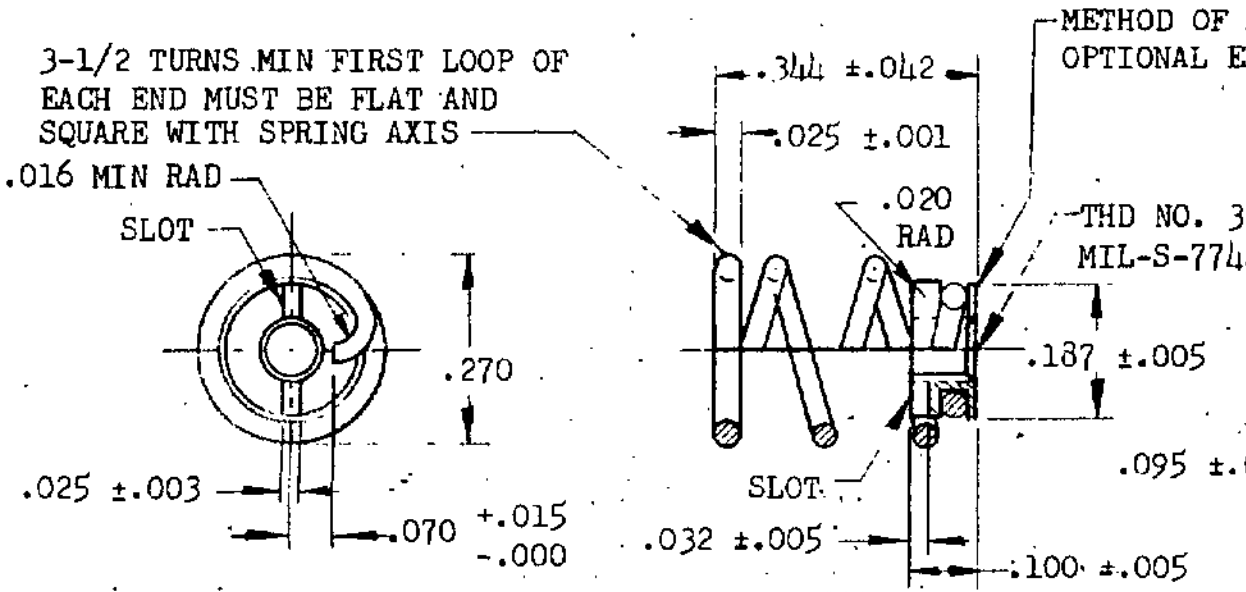
3-1/2 TURNS MIN FIRST LOOP OF EACH END MUST BE FLAT AND SQUARE WITH SPRING AXIS
.016 MIN RAD
SLOT
.270
.025 ±.003
.070 +.015 -.000
.344 ±.042
.025 ±.001
.020 RAD
METHOD OF ATTACHMENT CONTACT SPRING TO EYELET OPTIONAL EXCEPT THAT ATTACHMENT MUST BE TIGHT
THD NO. 3-48 NC-2 MIL-S-7742
.187 ±.005
SLOT
.032 ±.005
.100 ±.005

SPRING AND EYELET ASSEMBLY -6
MATERIAL: SPRING, QQ-W-423, 302, 304 OR EQUAL.
EYELET, CORROSION RESISTANT STEEL.
SPRING LOAD SHALL BE 28 ±3 OUNCES WHEN THE OVERALL COMPRESSED LENGTH OF THIS ASSEMBLY IS .130 ±.010.

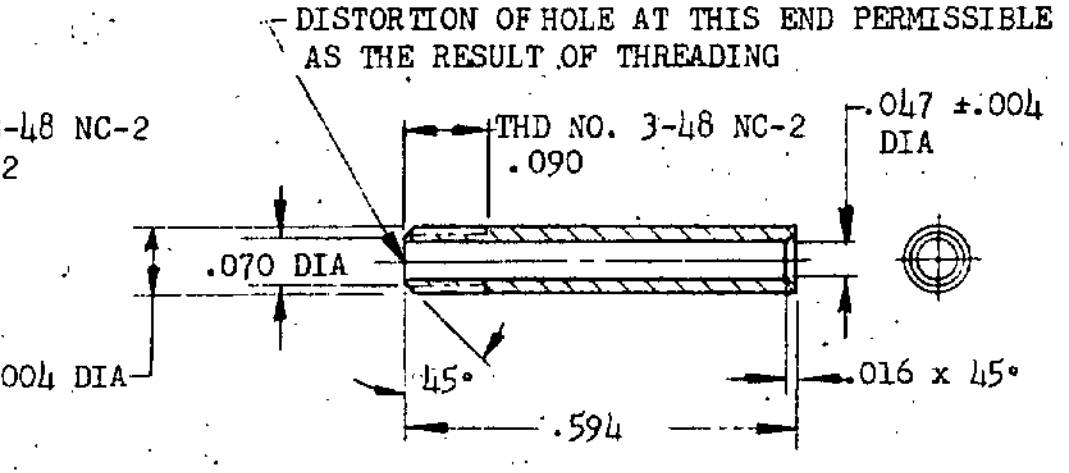

STUD -8
MATERIAL: AMS 5560, AMS 5565 OR EQUAL.
AMS 4610, AMS 4558
FINISH: BRASS, SILVER PLATE, QQ-S-365, THICKNESS .0002 TO .0004 AFTER THREADING.

METAL PARTS MAY BE ROLLED, STAMPED OR MACHINED PROVIDED THE SPECIFIED DIMENSIONS ARE MET.

(b) IF QQ-W-470 IS USED, STRESS RELIEVE AT 500-550°F FOR 30 MINUTES AFTER FORMING.

USER:

REVIEWER:
Army - MO
Navy - WP
USAF - 82

APPROVED 27 Dec 63

REVISED (A) FOR CHANGES SEE SHEET 1.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - WP Other Cust Army - MO USAF - 82	TITLE TERMINAL ASSEMBLY, SPARK PLUG, DETACHABLE IGNITION LEAD	MILITARY STANDARD MS21267
PROCUREMENT SPECIFICATION MIL-L-19844	SUPERSEDES: AN4164	SHEET 2 OF

DD FORM 672-1 1 SEP 57 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
2925

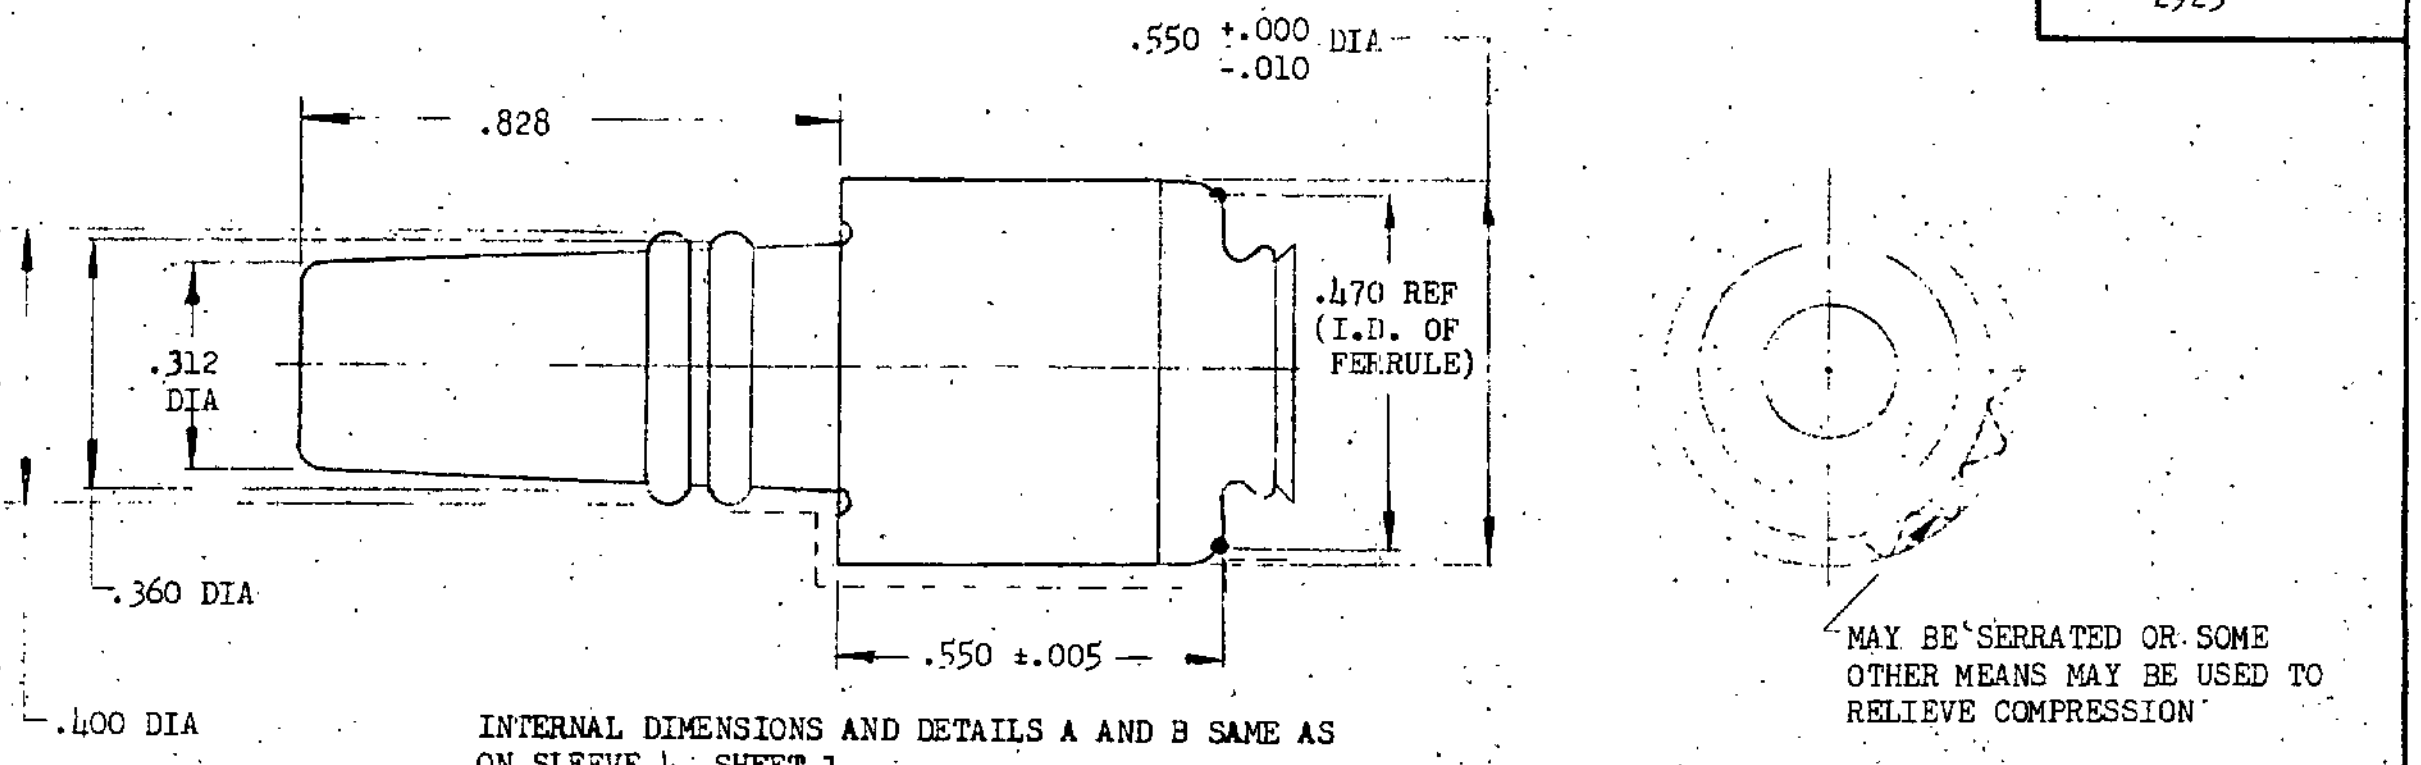

INTERNAL DIMENSIONS AND DETAILS A AND B SAME AS ON SLEEVE-4, SHEET 1.

MAY BE SERRATED OR SOME OTHER MEANS MAY BE USED TO RELIEVE COMPRESSION

SLEEVE (AND CAP) -5.

MATERIAL: SILICONE RUBBER, MIL-R-5847, GR 80, CLASS II OR EQUIVALENT. ALL CORNERS TO BE .020 -.005 RADIUS UNLESS OTHERWISE SPECIFIED. APPLY 8 KV (RMS) BETWEEN ID AND SURFACE INDICATED BY DASH LINE FOR 5 SECONDS.

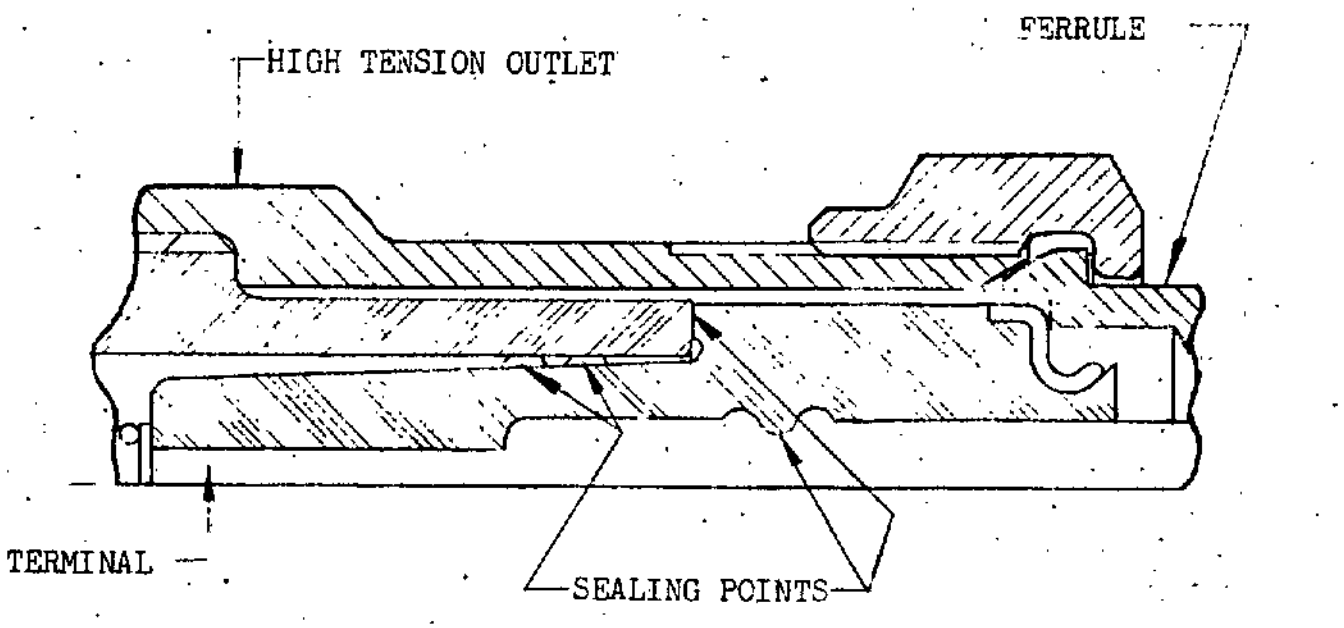

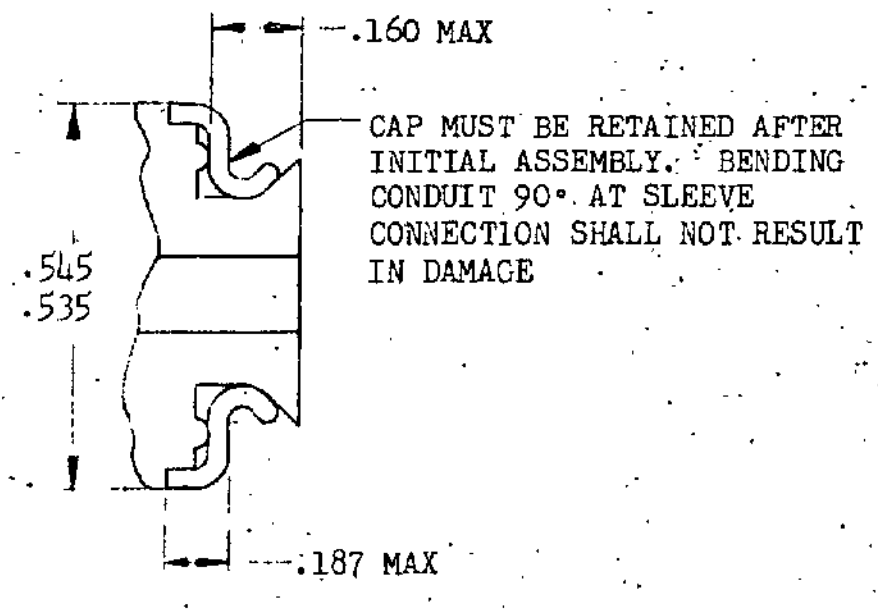

CAP MUST BE RETAINED AFTER INITIAL ASSEMBLY. BENDING CONDUIT 90° AT SLEEVE CONNECTION SHALL NOT RESULT IN DAMAGE

CAP

MATERIAL: CRES OR BRASS.
FINISH: SILVER PLATED.

TERMINAL ASSEMBLY - 2

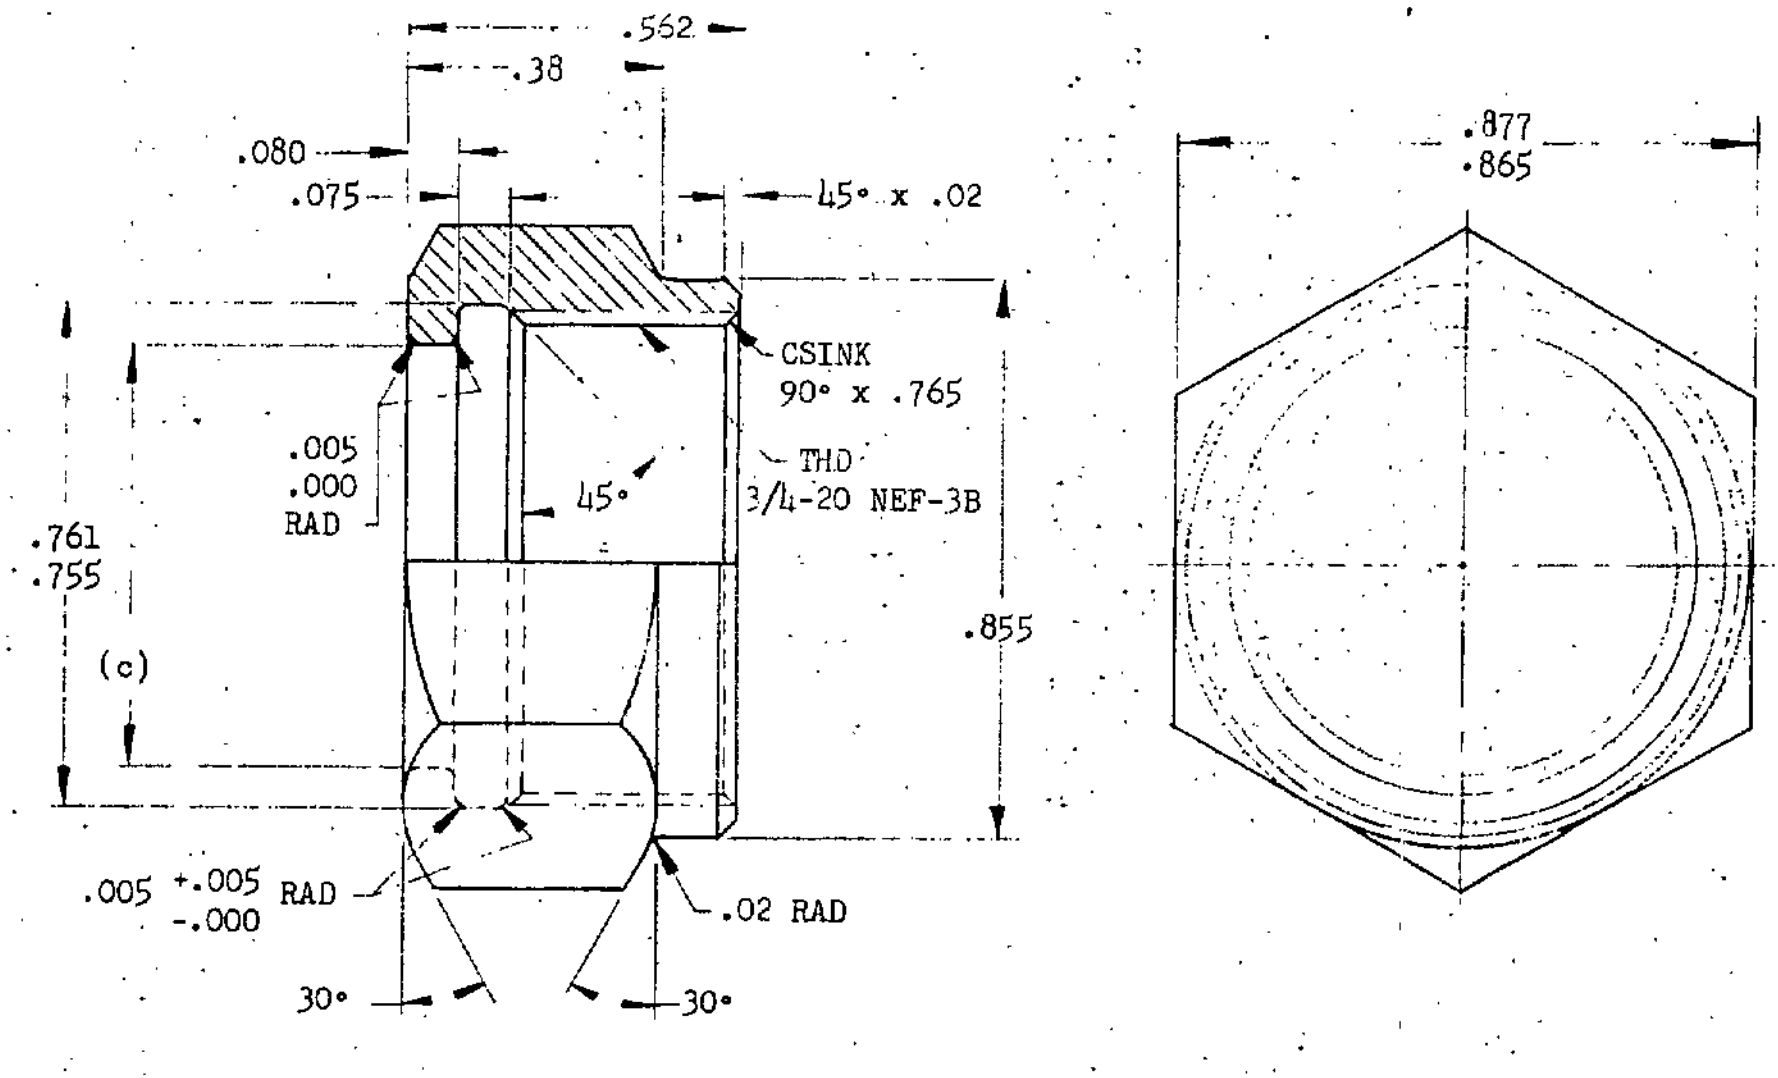

NUT -7

MATERIAL: CRES, QQ-S-763, TYPE 416.

(c) THIS DIMENSION OPTIONAL WITH MANUFACTURER. HOWEVER IT MUST BE SUCH AS TO PROVIDE A MINIMUM .020 SEAT (.040 DIAMETRICAL ENGAGEMENT) WHEN ASSEMBLED TO HIS FERRULE.

USER:

REVIEWER:
Army - MO
Navy - WP
USAF - 82

This mili dard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 27 Dec 63 REVISED (A) FOR CHANGES SEE SHEET 1.

P.A. Navy - WP
Other Cust
Army - MO
USAF - 82

TITLE
TERMINAL ASSEMBLY, SPARK PLUG, DETACHABLE IGNITION LEAD

MILITARY STANDARD
MS21267

PROCUREMENT SPECIFICATION
MIL-L-19844

SUPERSEDES: AN4164

SHEET 3 OF

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.