FED. SUP CLASS
5306

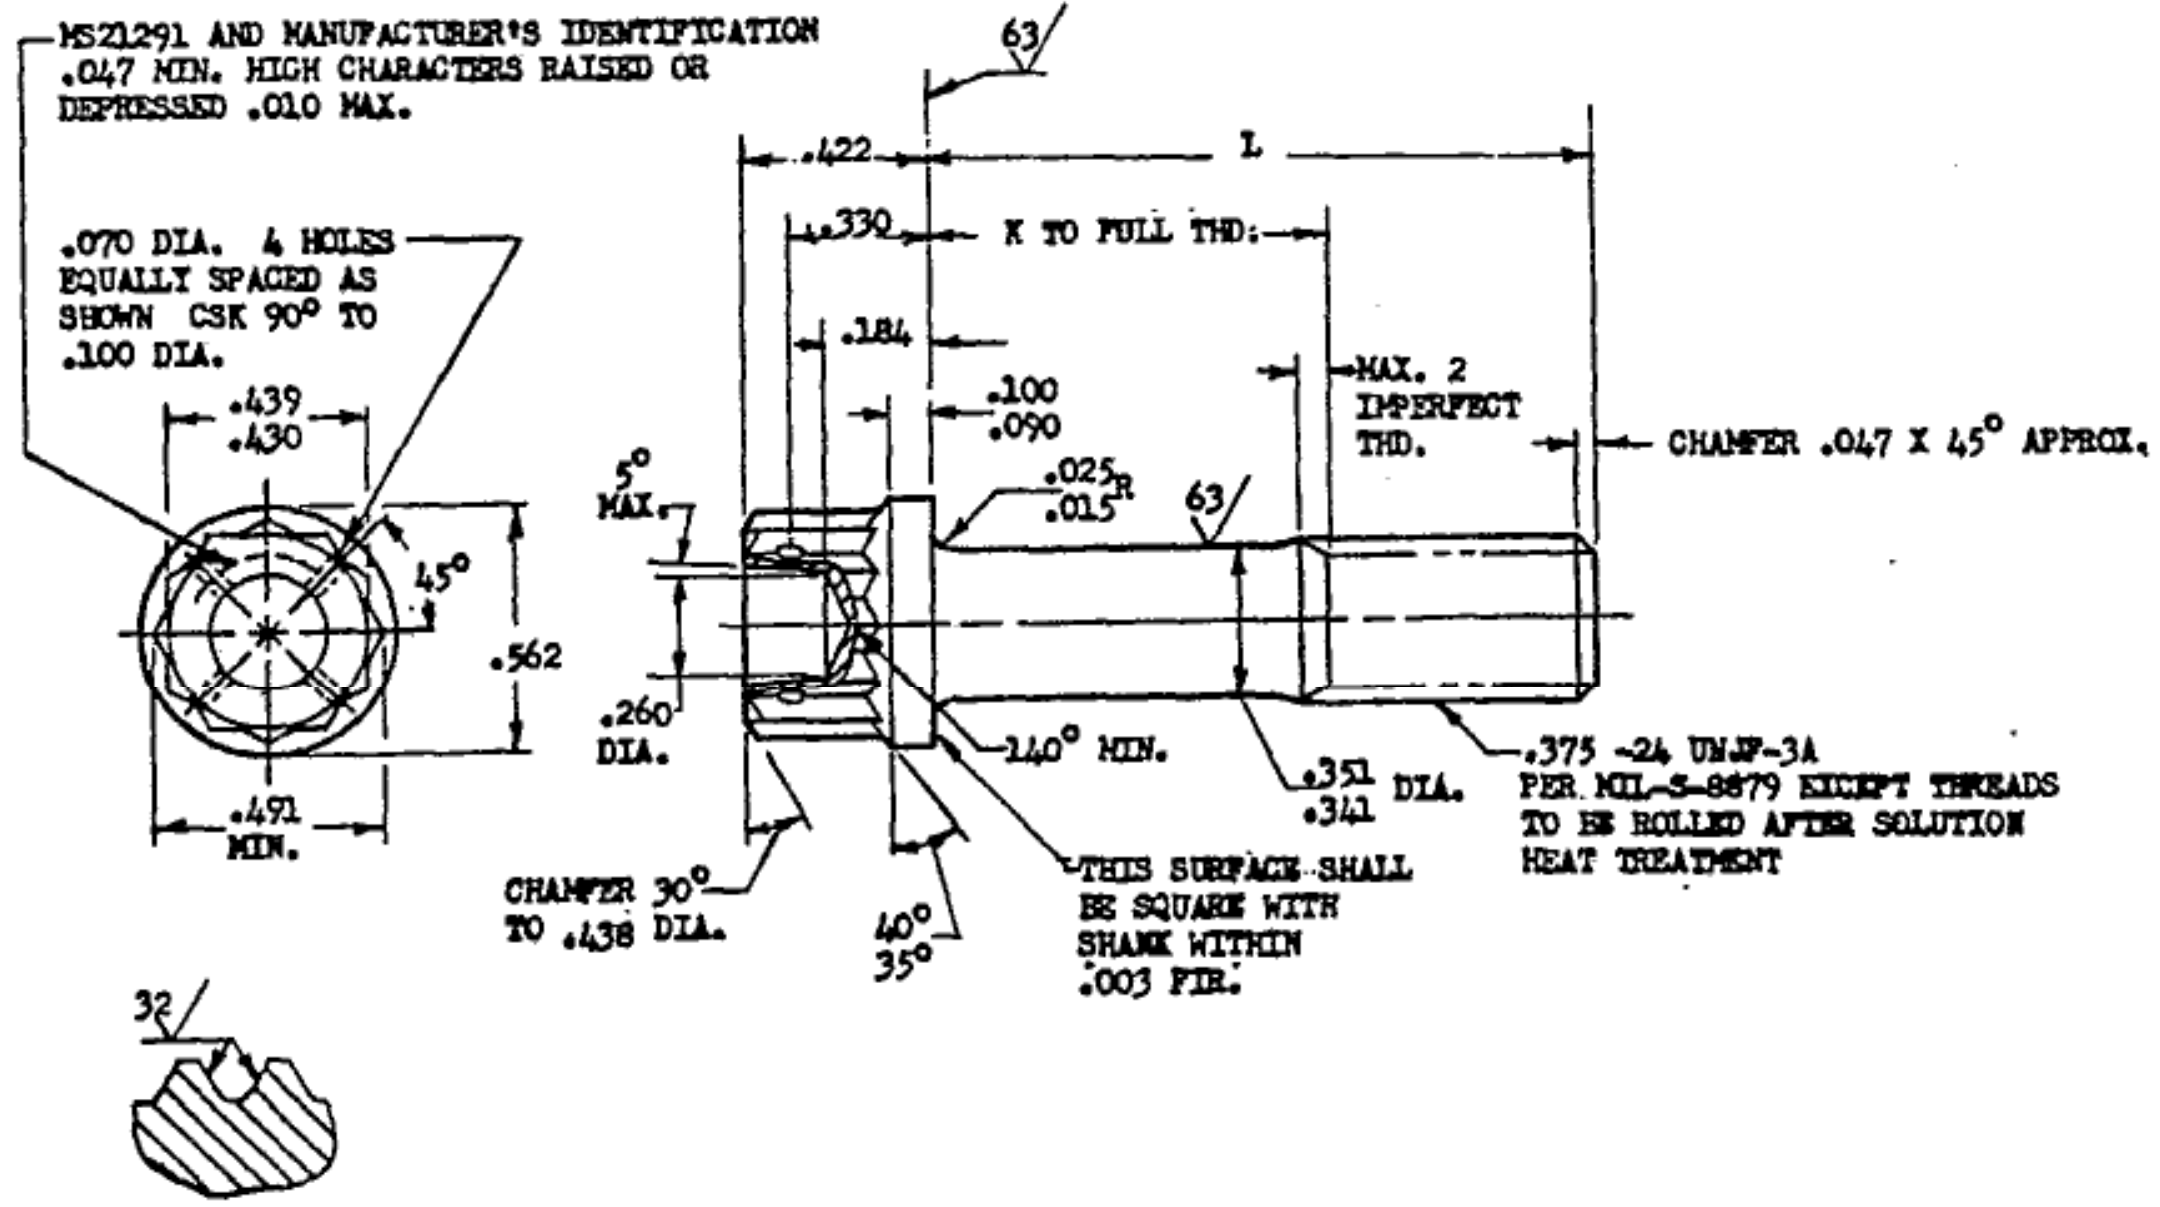
MS21291 AND MANUFACTURER'S IDENTIFICATION .047 MIN. HIGH CHARACTERS RAISED OR DEPRESSED .010 MAX.
63
.422
L
.330
K TO FULL THD.
.184
.100
.090
MAX. 2 IMPERFECT THD.
CHAMFER .047 X 45° APPROX.
.070 DIA. 4 HOLES EQUALLY SPACED AS SHOWN CSK 90° TO .100 DIA.
.439
.430
45°
.562
.491 MIN.
5° MAX.
.260 DIA.
.025
.015
R
63
140° MIN.
.351
.341
DIA.
.375 -24 UNJF-3A PER MIL-S-8879 EXCEPT THREADS TO BE ROLLED AFTER SOLUTION HEAT TREATMENT
CHAMFER 30° TO .438 DIA.
40°
35°
THIS SURFACE SHALL BE SQUARE WITH SHANK WITHIN .003 FIR.
32

SECTION THRU THREAD PROFILE

PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100
				MS21291-22	1.750	.750	6.44	MS21291-40	4.000	3.000	12.47
				MS21291-23	1.875	.875	6.77	MS21291-41	4.125	3.125	12.80
MS21291-06	.750	(a)	3.74	MS21291-24	2.000	1.000	7.11	MS21291-42	4.250	3.250	13.13
MS21291-07	.812	(a)	3.90	MS21291-25	2.125	1.125	7.44	MS21291-43	4.375	3.375	13.46
MS21291-08	.875	(a)	4.07	MS21291-26	2.250	1.250	7.78	MS21291-44	4.500	3.500	13.89
MS21291-09	.938	(a)	4.24	MS21291-27	2.375	1.375	8.11	MS21291-45	4.625	3.625	14.23
MS21291-10	1.000	(a)	4.41	MS21291-28	2.500	1.500	8.44	MS21291-46	4.750	3.750	14.56
MS21291-11	1.062	(a)	4.58	MS21291-29	2.625	1.625	8.78	MS21291-47	4.875	3.875	14.89
MS21291-12	1.125	.125	4.75	MS21291-30	2.750	1.750	9.12	MS21291-48	5.000	4.000	15.23
MS21291-13	1.188	.188	4.91	MS21291-31	2.875	1.875	9.46	MS21291-49	5.125	4.125	15.57
MS21291-14	1.250	.250	5.06	MS21291-32	3.000	2.000	9.80	MS21291-50	5.250	4.250	15.90
MS21291-15	1.312	.312	5.25	MS21291-33	3.125	2.125	10.13	MS21291-51	5.375	4.375	16.23
MS21291-16	1.375	.375	5.43	MS21291-34	3.250	2.250	10.47	MS21291-52	5.500	4.500	16.56
MS21291-17	1.438	.438	5.60	MS21291-35	3.375	2.375	10.80	MS21291-53	5.625	4.625	16.89
MS21291-18	1.500	.500	5.76	MS21291-36	3.500	2.500	11.14	MS21291-54	5.750	4.750	17.23
MS21291-19	1.562	.562	5.93	MS21291-37	3.625	2.625	11.47	MS21291-55	5.875	4.875	17.57
MS21291-20	1.625	.625	6.10	MS21291-38	3.750	2.750	11.80	MS21291-56	6.000	5.000	17.91
MS21291-21	1.688	.688	6.27	MS21291-39	3.875	2.875	12.14				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS. EXCEPT INCOMPLETE THREADS NOT TO ENTER FILLET RADIUS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .017 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735.
MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEADS TO BE FORMED BY HOT OR COLD UPSETTING.
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
SURFACE ROUGHNESS: MIL-STD-10 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 1 May 61 REVISED Ⓐ 23 Oct 61 Ⓑ 17 Sep 63

his standard been approved by the BuWep (Department of the Navy) and the
epartment of the USAF and is mandatory for use by
hat activity. All other military activities are required
employ this standard where suitable.

P.A. Navy - Wep
Other Cust Air Force - ASD

PROCUREMENT SPECIFICATION
NONE

TITLE
BOLT, MACHINE - STEEL, DRILLED DOUBLE HEXAGON,
EXTENDED WASHER, .375-24
(MIL-S-8879 THREAD) Ⓑ

SUPERSEDES:

MILITARY STANDARD
MS21291 (ASG)
SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.