INCH-POUND

MS24141L
17 October 2022
SUPERSEDING
MS24141K
15 April 2003

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 100 AMPERES, 1 PST (N.O.), TYPE I, HERMETICALLY SEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.


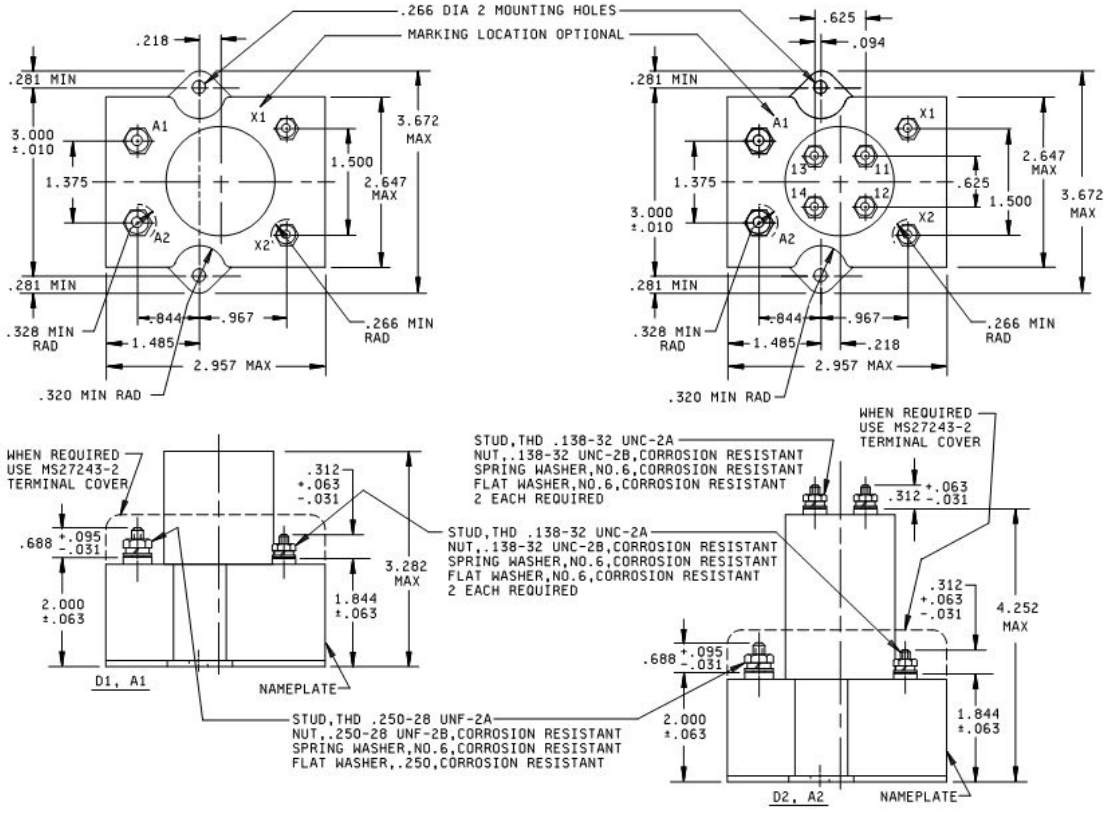


FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

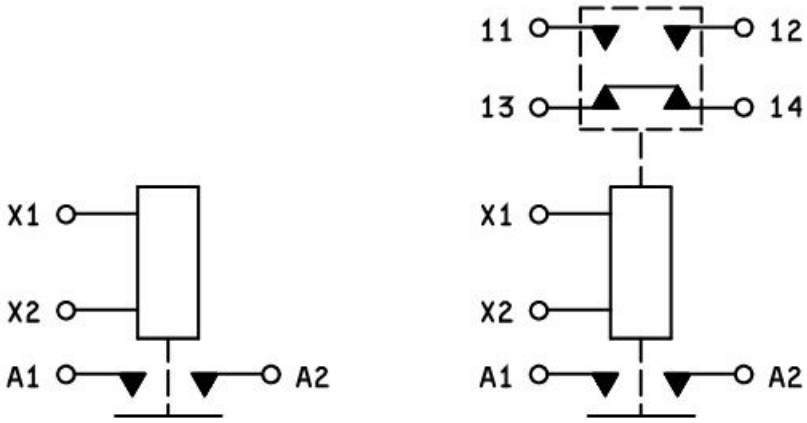

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.281	7.14	1.500	38.10
.031	0.79	.312	7.92	1.844	46.84
.063	1.60	.320	8.13	2.000	50.80
.094	2.39	.328	8.33	2.647	67.23
.095	2.41	.625	15.88	2.957	75.11
.138	3.51	.688	17.48	3.000	76.20
.218	5.54	.844	21.44	3.282	83.26
.250	6.35	.967	24.56	3.672	93.27
.266	6.76	1.375	34.93	4.252	108.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031.
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced Government documents of the issue listed in that issue of the Acquisition Streamlining and Standardization Information System (ASSIST) specified in the solicitation forms a part of this specification sheet to the extent specified herein.
6. Coil and auxiliary terminals may use additional flat washer for terminal seat.
7. Cadmium or cadmium compounds are prohibited on external hardware. A transition period to non-cadmium hardware is authorized for up to 1 year from the date of this revision.
8. Spring washer on drawing is a spring lock washer.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Environmental characteristics:

Temperature range: -70° to +125°C.

Maximum altitude rating: 80,000 ft.

Shock G-level: 25 g's.

Duration: 6-9 ms.

Max duration contact opening: 2 ms.

Vibration - sinusoidal: See table I.

Vibration - random: Not applicable.

High shock: Not applicable.

Acceleration: 15 g's.

Electrical characteristics (see tables II, III, and IV):

Insulation resistance, initial: 100 megohms.

After life or environmental tests: 50 megohms.

Dielectric strength (sea level): 2-5 seconds.

	Init ial		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	1,500	1,000 V rms	1,125
Aux contacts	1,250 V rms	1,500	1,000 V rms	1,125
All other points	1,250 V rms	1,500	1,000 V rms	1,125

Dielectric strength (altitude): 1 minute.

	28 V dc	115 V ac
Coil to case	500 V rms	500
Aux contacts	500 V rms	500
All other points	500 V rms	500

Max contact drop initial: .150 volt.

After life test: .175 volt.

Overload current (NO): 800 amperes.

Rupture current (NO): 1000 amperes.

Duty rating: Continuous.

RFI specification: MIL-STD-461.
(Applicable to coil circuits of ac operated relays).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

TABLE I. Vibration levels.

Dash number	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
D1	.08 DA	.06 DA	10 g's	10 g's	7 g's
D2				5 g's	5 g's

TABLE II. Operating characteristics.

PIN MS 24141-	Coil	Coil data										Time - milliseconds max 2/					
		Rated			Max		Max pick-up voltage			Hold voltage 2/	Drop out voltage 2/	Operate 3/	Release 4/	Bounce 4/			
		Volts 1/	Freq Hz	Ω Res +15 % -10	Volts	Amp	Normal 2/	High Temp test	Cont current test					Main		A ux	
														NO	NC	NO	NC
D1	X1,X2	28	dc	64.5	29	0.5	18	21	22.5	7	1.5	25	10	2.5	---	---	---
D2	X1,X2	28	dc	64.5	29	0.5	18	21	22.5	7	1.5	25	10	2.5	---	4	4

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With rated coil voltage.
4/ From rated coil voltage.

TABLE III. Rated contact load (amperes per pole) case grounded.

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/			
		Main		Aux		Main		Aux		Main		A ux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
Resistive	50	100		5	5	100		5					
Inductive	10	100		5	5			5					
Motor	50	100				75							
Lamp 2/	50	50		.75	.75	50		.75					
Transfer load 3/													
Mechanical life reduced current	100	25		1.25	1.25	1.25		1.25					
Mixed loads	50	10		Applicable per spec		10							

1/ Absence of value indicates relay is not rated for 3-phase application.
2/ The total "On" time shall be 2 seconds ±0.05 second and the "Off" time shall be 7 seconds ±2.0 seconds for a simulated lamp load.
3/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): MS24141 (plus dash number from table IV).

General characteristics: See table IV.

TABLE IV. Dash numbers and general characteristics. 1/

Part number MS24141-	Type	Coil type	Terminal type	Mounting or mating socket	Auxiliary contacts	Maximum weight in pounds 2/
D1	I	dc	Stud	Flange	None	1.4
D2		dc			Yes	1.6

1/ A1 and A2 have been canceled without replacement.
2/ Weights include covers and barriers.

If the relays produced for MS24141 are similar in construction and design except for the power rating to the relays produced for MS24140 and MS24142, then reduced testing for qualification of MS24141 relays may be performed concurrent with or subsequent to successful qualification of MS24140 or MS24142.

Qualification by similarity: See MIL-PRF-6106.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:

MIL-STD-461 MS27243 MS24140 MS24142

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2022-053)

Review activity:
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.