


FED. SUP CLASS
4730

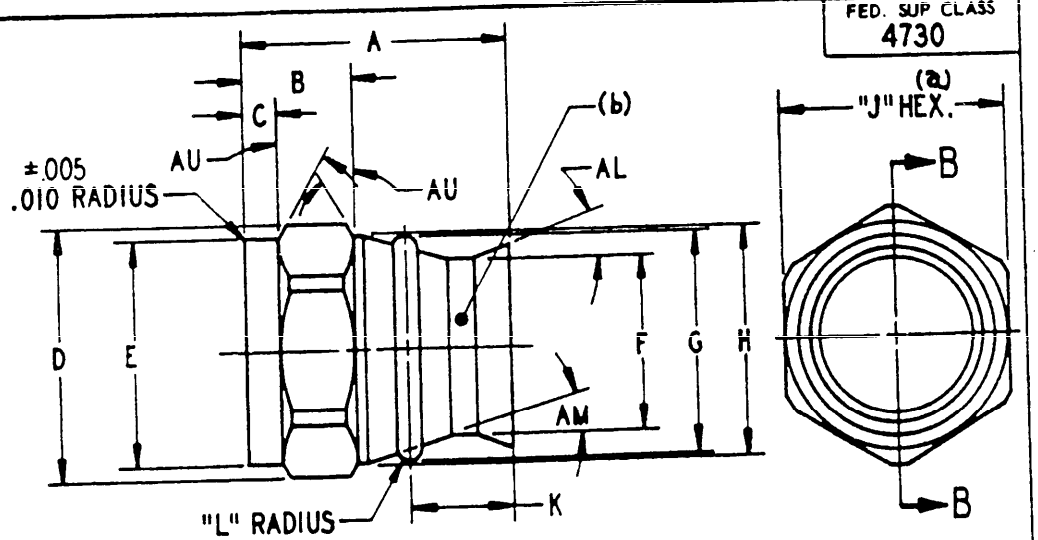

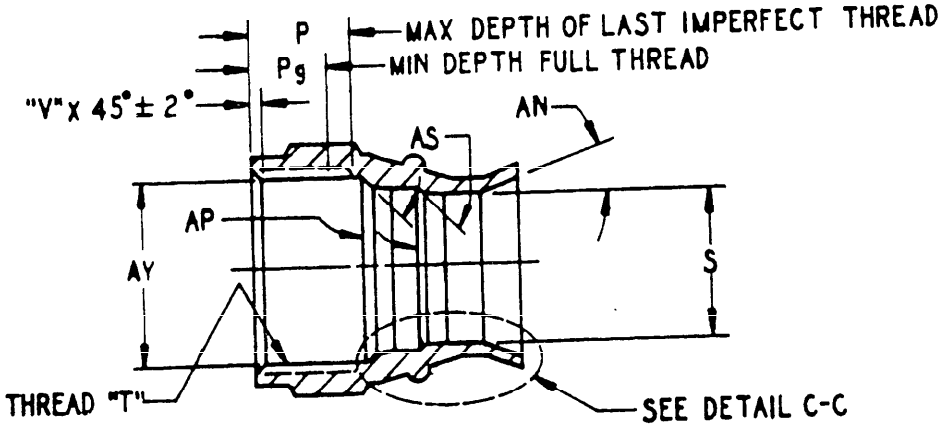

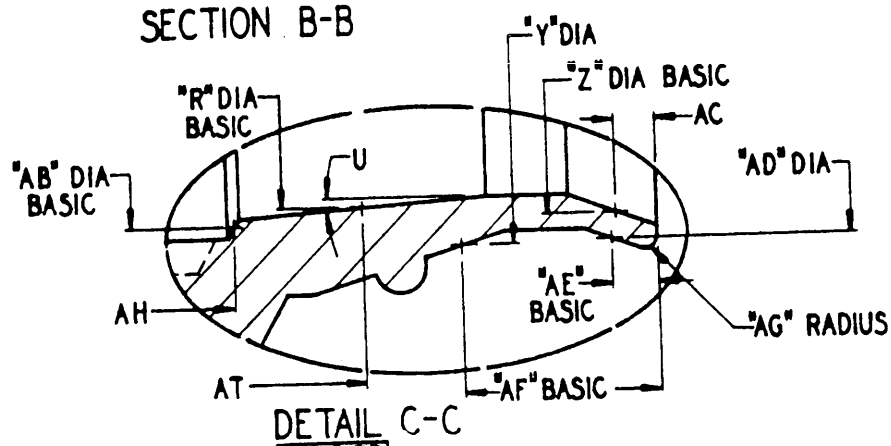

APPROVED 17 Mar 71

NOTE : THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)


This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A.: USAF—11 Other Cust	TITLE: SOCKET, HOSE COUPLING	MILITARY STANDARD MS27622
Procurement Specification MIL—F—83296	SUPERSEDES:	SHEET 1 OF 4


DD FORM 1 SEP 67 672 (Limited coordination) 8 OF THIS FORM ARE OBSOLETE. DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
4730

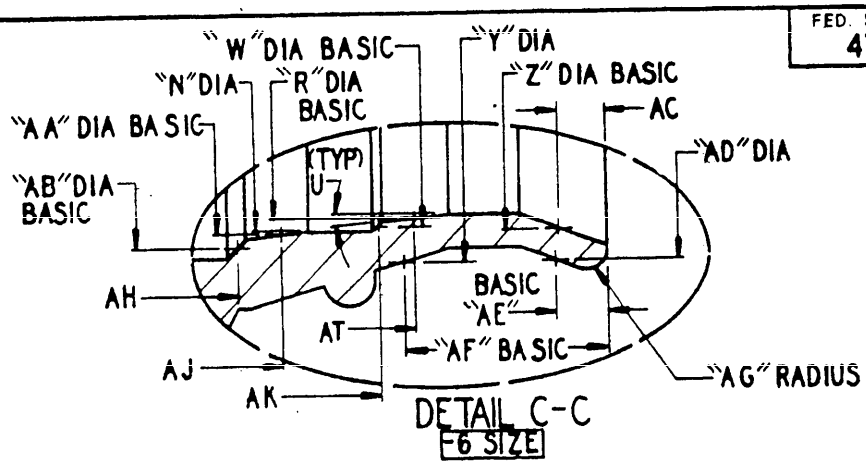

DETAIL C-C
-6 SIZE

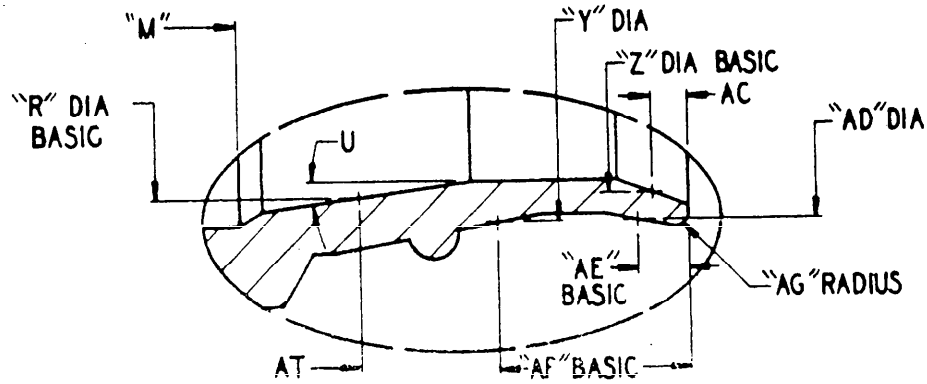

DETAIL C-C
-8 SIZE

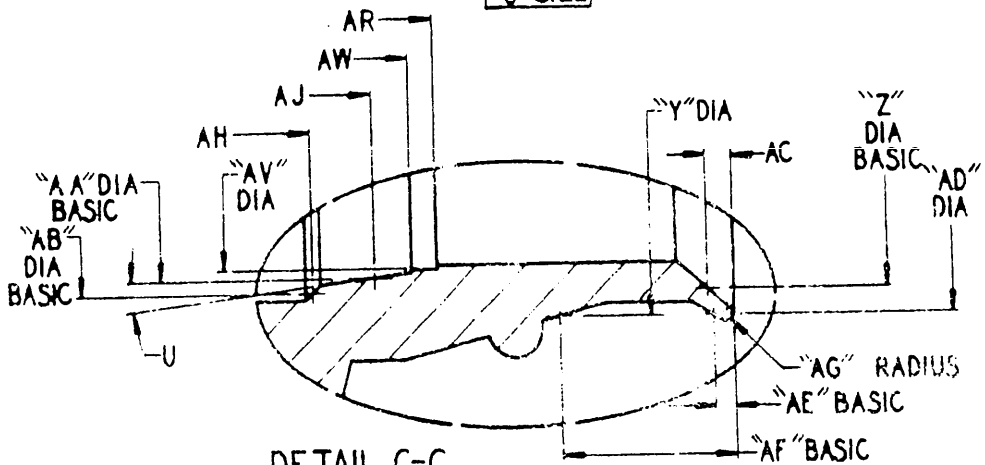

DETAIL C-C
-10 SIZE

APPROVED 17 Mar 71

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF—11 Other Cust	TITLE SOCKET, HOSE COUPLING	MILITARY STANDARD MS27622
Procurement Specification MIL—F—83296	SUPERSEDES:	SHEET 2 OF 4

DD FORM SEP 67 672 (Limited coordination) ... THIS FORM ARE OBSOLETE

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

(a) USE COMMERCIAL STOCK SIZE TOLERANCES.
(b) MS PART NO. AND MANUFACTURER'S TRADEMARK HERE.
THREADS PER SPEC MIL-S-7742.
MATERIAL : CORROSION RESISTING STEEL, CLASS 304
CONDITION "B" PER SPEC QQ-S-763.
MIN YIELD ; 70,000 PSI ON -4C, -6C AND -8C
AND 60,000 PSI ON -10C
PASSIVATE PER PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED :
RADIUS OR BREAK ALL CORNERS .005, +.005/-.000.
REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS
PER ANSI B46.1-1962 NOT TO EXCEED 125 AA.
ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .005 TIR.
THIS PART FOR USE WITH MIL-H-83298 HOSE.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS
REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT
ON DATE OF INVITATION FOR BID.
NEXT ASSEMBLY MS27616 THRU MS27618 AND MS27629 THRU MS27631.

MS PART NUMBER	A ±.010	B ±.005	C ±.005	D ±.005	E ±.005	F ±.005	G ±.005
MS27622-4C	1.025	.485	.155	.825	.750	.580	.750
MS27622-6C	1.017	.420	.140	.962	.870	.690	.870
MS27622-8C	1.230	.565	.265	1.100	.995	.870	.995
MS27622-10C	1.271	.530	.155	1.375	1.243	1.032	1.243

H ±.005	J (a)	K ±.005	L ±.005	M ±.005	N ±.005	P	P_g	R
.750	.750	.386	.030	—	—	.395	.310	.5068
.870	.875	.402		—	.635		.295	.6030
.995	1.000	.436	.050	.436	—	.400	.335	.7868
1.243	1.250	.446		—	—		.295	—

S +.005 -.000	THREAD T	PITCH DIAMETER	U		V ±.015	W	Y ±.005
.485	5/8-18UNF-3B	.5934 / .5889	4°	±15'	.031	—	.632
.585	3/4-16UNF-3B	.7143 / .7094	6°			.6232	.723
.755	7/8-24UNS-3B	.8519 / .8479	7°		.030	—	.892
.894	1 1/16-20UN-3B	1.0344 / 1.0300		±30'	.037	—	1.081

APPROVED 17 Mar 71

NOTE : THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust	TITLE SOCKET, HOSE COUPLING	MILITARY STANDARD MS27622
Procurement Specification MIL-F-83296	SUPERSEDES:	SHEET 3 OF 4

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. DATE

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

Z	AA	AB	AC ±.010	AD ±.005	AE	AF	AG ±.005	AH ±.005
.5388	—	.5488	.070	.632	.0721	.3308	.015	.410
.6362	.6448	.6718	.074	.723	.0861	.3013		.435
.7983	—	—	.071	.898	.0794	.3220		—
.9762	.9547	.9870	.056	1.081	.0424	.3387		.461

AJ ±.005	AK ±.005	AL ±2°	AM ±2°	AN ±2°	AP		AR ±.005	AS ±30′	AT ±.005
—	—	20°	17°	20°	30°	±30′	—	—	.555
.490	.642		16°		45°		—	45°	.689
—	—	10°	10°		60°		—	—	.580
.524	—	30°	15°	40°	45°	±2°	.694	—	—

AU ±5°	AV +.005 −.000	AW ±.005	AY	
15°	—	—	.565	+.008 −.000
	—	—	.682	+.009 −.000
	—	—	.830	+.007 −.000
	.914	.578	1.008	+.008 −.000

APPROVED 17 Mar 71

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF—11 Other Cust	TITLE SOCKET, HOSE COUPLING	MILITARY STANDARD MS27622
Procurement Specification MIL—F—83296	SUPERSEDES:	SHEET 4 OF 4

DD FORM 1 SEP 67 672 (Limited coordination) ITEMS OF THIS FORM ARE OBSOLETE. DATE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-158/2459

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:45Z
Check the source to verify that this is the current version before use.