
INCH-POUND
MS27754G
2 December 2021
SUPERSEDING
MS27754F
13 April 2011

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, MINIATURE, DOUBLE POLE
TOGGLE SEAL, LEVER LOCK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83731.

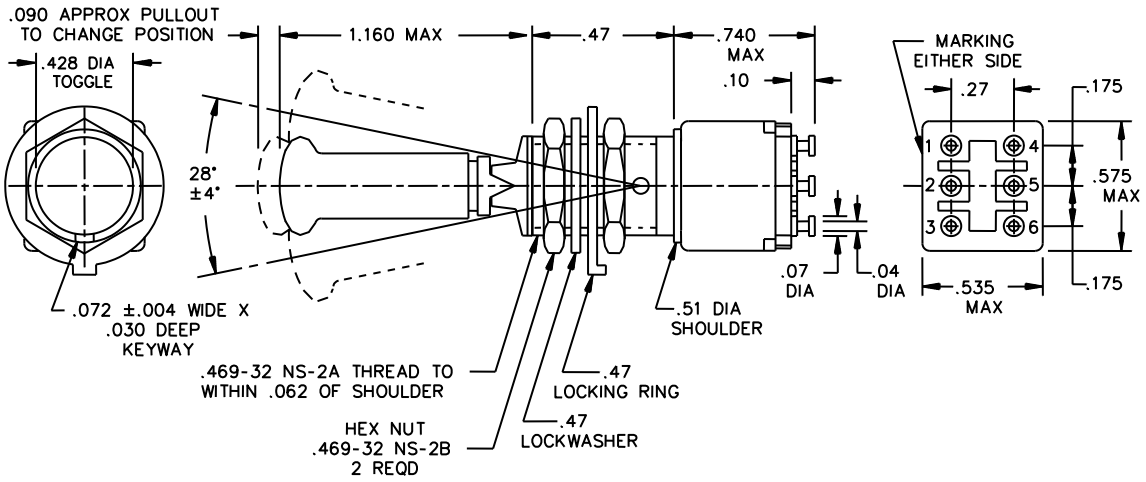

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.020 on two place decimals and ±.005 on three place decimals.
3. For hardware detail specifications, see supplement of MIL-DTL-83731.
4. Configuration of switch case is optional provided maximum dimensions specified are not exceeded.

FIGURE 1. Dimensions and configurations.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.

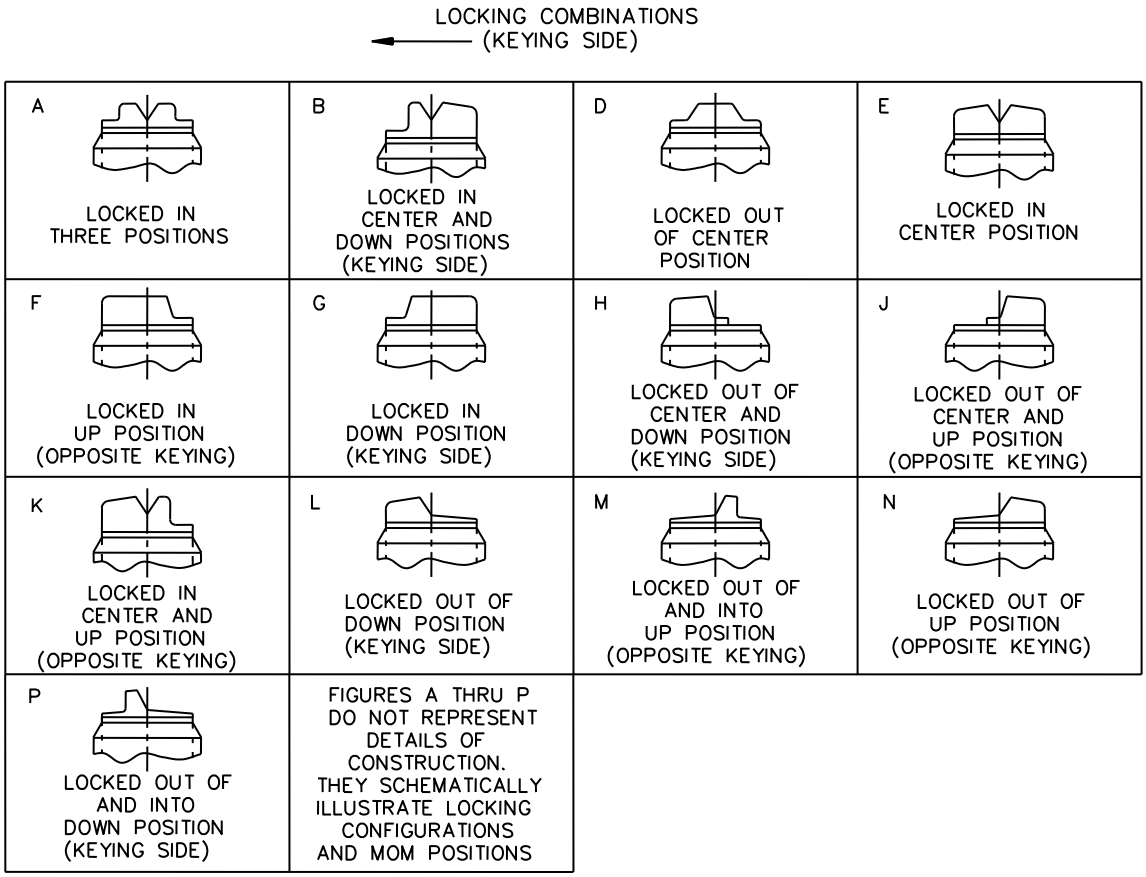


FIGURE 2. Detail requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.

Canceled MS part number 1/	Substitute part number 1/	Available locking combinations	Circuits made with toggle lever in		
			Keying side 1-2 4-5	Center position	Opposite keying side 2-3 5-6
MS27754-1	MS27754-34	All	On	2-3 on 4-5	On
-2	-35	E, F, K, L, M, N	Mom-on	2-3 on 4-5	On
-3	-36	E, L, N	Mom-on	2-3 on 4-5	Mom-on
-4	-38	All	On	1-2 on 5-6	On
-5	-39	E, F, K, L, M, N	Mom-on	1-2 on 5-6	On
-6	-40	E, L, N	Mom-on	1-2 on 5-6	Mom-on

1/ The canceled part numbers are no longer acquirable; the substitute part numbers have a lower dielectric withstanding voltage at reduced barometric pressure (see test voltage requirement below).

REQUIREMENTS:

All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.

Test voltage for dielectric withstanding voltage at reduced barometric pressure, shall be 400 V rms minimum.

Electrical endurance shall be performed for 30,000 cycles.

Mechanical endurance shall be performed 50,000 cycles at -65°C and then 50,000 cycles at 85°C.

Intermediate current shall be performed for 30,000 cycles.

Terminals shall be molded into the switch case and shall accommodate No. 18 AWG wire.

Locking arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.

The force required to release the locking mechanism shall be 3 to 5 pounds.

The locking means at the top of the toggle bushing shall be capable of withstanding a torque of 20 pound inches applied in both directions immediately following the humidity test.

Maximum weight shall be .045 pound.

Electrical ratings for 28 V dc and 115 V ac at 400 Hz. Lamp load = 1 ampere, resistive load = 5 amperes, inductive load = 2 amperes.

Part or Identifying Number (PIN) example: MS27754-36L (locking combination "L").

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Reference documents:
MIL-DTL-83731

Custodian:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-009)

Review activity:
Army - AV, EA
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.