
Form Approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE


CONFIGURATION AND MATERIAL

CORROSION RESISTANT STEEL (450° F)

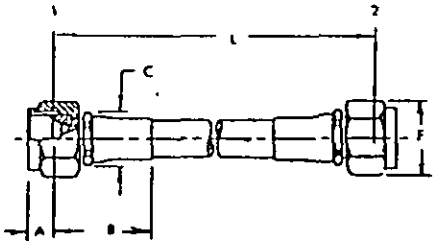

STYLE A


FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.
STRAIGHT	STRAIGHT	3/4C	.372	1.049	.620	.580
		-4C	.375	1.049	.620	.654
		-5C	.380	1.194	.680	.726
		-6C	.380	1.303	.750	.798
		-8C	.438	1.465	.880	1.014
		-10C	.515	1.680	.967	1.158
		-12C	.570	1.727	1.122	1.447
		-16C	.620	2.101	1.480	1.736
		-20C	.640	2.255	1.750	2.328
		-24C	.765	2.400	2.150	2.621

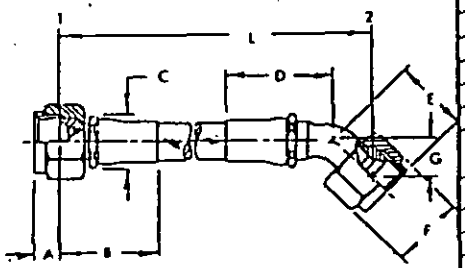

STYLE B

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
STRAIGHT	45 DEG.	3/4C	.372	1.049	.620	1.240	.921	.580
		-4C	.375	1.049	.620	1.490	.979	.654
		-5C	.380	1.194	.680	1.495	1.009	.726
		-6C	.380	1.303	.750	1.610	1.079	.798
		-8C	.438	1.465	.880	1.722	1.332	1.014
		-10C	.515	1.680	.967	2.037	1.488	1.158
		-12C	.570	1.727	1.122	2.368	1.667	1.447
		-16C	.620	2.101	1.480	2.583	1.879	1.736
		-20C	.640	2.255	1.750	2.946	2.058	2.328
		-24C	.765	2.400	2.150	3.210	2.400	2.621

HOSE SIZE	"G" MIN.	"G" MAX.
-3/4C	.263	.388
-4C	.302	.427
-5C	.320	.445
-6C	.369	.494
-8C	.445	.632
-10C	.501	.688
-12C	.588	.775
-16C	.609	.857
-20C	.697	1.017
-24C	.785	1.127

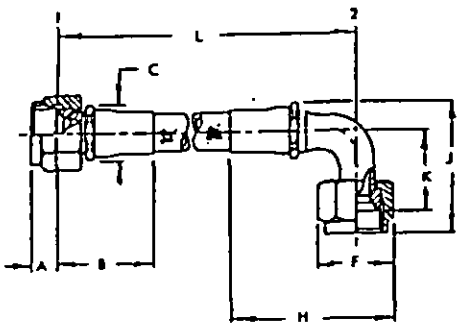

STYLE C

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
STRAIGHT	90 DEG.	-3/-4C	.372	1.049	.620	.580	1.845	1.320
		-4C	.375	1.049	.620	.654	1.885	1.370
		-5C	.380	1.194	.680	.726	1.980	1.542
		-6C	.380	1.303	.750	.798	2.205	1.640
		-8C	.438	1.465	.880	1.014	2.495	1.938
		-10C	.515	1.680	.967	1.158	2.955	2.340
		-12C	.570	1.727	1.122	1.447	3.705	2.722
		-16C	.620	2.101	1.480	1.736	4.100	3.075
		-20C	.640	2.255	1.750	2.328	4.835	3.637
		-24C	.765	2.400	2.150	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.
-3/4C	.510	.635
-4C	.560	.685
-5C	.635	.822
-6C	.700	.885
-8C	.810	1.060
-10C	1.091	1.341
-12C	1.341	1.591
-16C	1.465	1.715
-20C	1.747	2.122
-24C	1.997	2.372

(C) ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY-AV NAVY-AS
AIR FORCE-99 DLA-
REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS
USER:
PROJECT NUMBER: 4720-0757

MILITARY SPECIFICATION SHEET

TITLE
HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE

SPECIFICATION SHEET NUMBER 15 Apr 91
MS 8005C

SUPERSEDING
MS8005B 30 JUN 85

AMSC. N/A FSC. 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

Form Approved
OMB No. 0704-0188

CONFIGURATION AND MATERIAL


CORROSION RESISTANT STEEL (450° F)

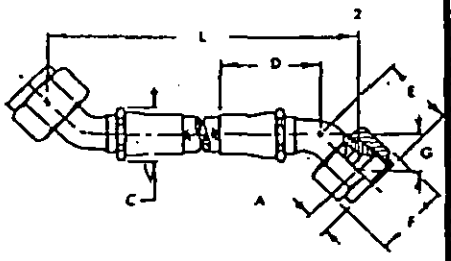

STYLE "D"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	
45 DEG.	45 DEG	-3/-4C	.372	.620	1.240	.921	.580	
		-4C	.375	.620	1.490	.979	.654	
		-5C	.380	.680	1.495	1.009	.726	
		-6C	.380	.750	1.610	1.079	.798	
		-8C	.438	.880	1.722	1.332	1.014	
		-10C	.515	.967	2.037	1.488	1.158	
		-12C	.570	1.122	2.368	1.667	1.447	
		-16C	.620	1.480	2.583	1.879	1.736	
		-20C	.640	1.750	2.946	2.058	2.328	
		-24C	.765	2.150	3.210	2.400	2.621	

HOSE SIZE	"G" MIN.	"G" MAX.
-3/4C	.263	.388
-4C	.302	.427
-5C	.320	.445
-6C	.369	.494
-8C	.445	.632
-10C	.501	.688
-12C	.588	.775
-16C	.609	.857
-20C	.697	1.017
-24C	.785	1.127

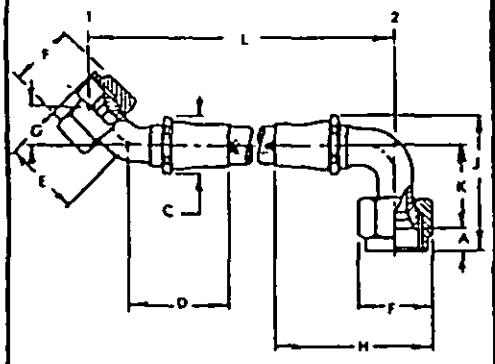

STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG	-3C/-4C	.372	.620	1.240	.921	.580	.263
		-4C	.375	.620	1.490	.979	.654	.302
		-5C	.380	.680	1.495	1.009	.726	.320
		-6C	.380	.750	1.610	1.079	.798	.369
		-8C	.438	.880	1.722	1.332	1.014	.445
		-10C	.515	.967	2.037	1.488	1.158	.501
		-12C	.570	1.122	2.368	1.667	1.447	.588
		-16C	.620	1.480	2.583	1.879	1.736	.625
		-20C	.640	1.750	2.946	2.058	2.328	.733
		-24C	.765	2.150	3.210	2.400	2.621	.832

HOSE SIZE	"G" MAX.	"H" MAX.	"J" MAX.	"K" MIN.	"K" MAX.
-3/4C	.388	1.845	1.320	.510	.635
-4C	.427	1.885	1.370	.560	.685
-5C	.445	1.980	1.542	.635	.822
-6C	.494	2.205	1.640	.700	.885
-8C	.632	2.495	1.938	.810	1.060
-10C	.688	2.955	2.340	1.091	1.341
-12C	.775	3.705	2.722	1.341	1.591
-16C	.857	4.100	3.075	1.465	1.715
-20C	1.017	4.835	3.637	1.747	2.122
-24C	1.127	5.480	4.212	1.997	2.372

(C) ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY-AV NAVY-AS AIR FORCE-99 DLA-
REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS
USER:
PROJECT NUMBER: 4720-0757

MILITARY SPECIFICATION SHEET

TITLE
HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE

SPECIFICATION SHEET NUMBER 15 Apr 91
MS 8005C

SUPERSEDING
MS8005B 30 JUN 85

AMSC. N/A FSC. 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.


DD Form 672, MAY 88

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

CONFIGURATION AND MATERIAL

CORROSION RESISTANT STEEL (450° F)

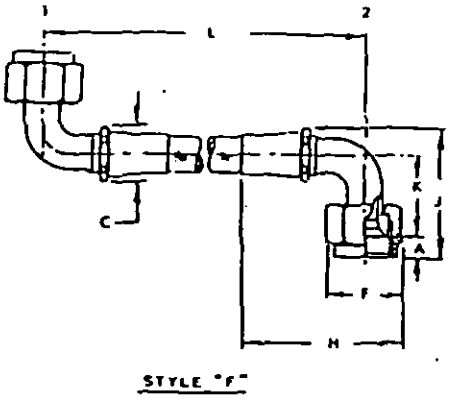

STYLE "F"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG.	90 DEG.	-3C/-4C	.372	.620	.580	1.845	1.320
		-4C	.375	.620	.650	1.885	1.370
		-5C	.380	.680	.726	1.980	1.542
		-6C	.380	.750	.798	2.205	1.640
		-8C	.438	.880	1.014	2.495	1.938
		-10C	.515	.967	1.158	2.955	2.340
		-12C	.570	1.122	1.447	3.705	2.722
		-16C	.620	1.480	1.736	4.100	3.075
		-20C	.640	1.750	2.328	4.855	3.637
		-24C	.765	2.150	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.
-3/4C	.510	.635
-4C	.560	.685
-5C	.635	.822
-6C	.700	.885
-8C	.810	1.060
-10C	1.091	1.341
-12C	1.341	1.591
-16C	1.465	1.715
-20C	1.747	2.122
-24C	1.997	2.372

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

© ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82 CUSTODIANS: ARMY- AV NAVY-AS AIR FORCE- 99 DLA- REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS USER: PROJECT NUMBER: 4720-0757	MILITARY SPECIFICATION SHEET TITLE HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE	SPECIFICATION SHEET NUMBER 15 Apr 91 MS 8005C SUPERSEDING MS8005B 30 JUN 85 AMSC. N/A FSC. 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579


Form Approved
OMB No. 0704-0188

CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275° F)

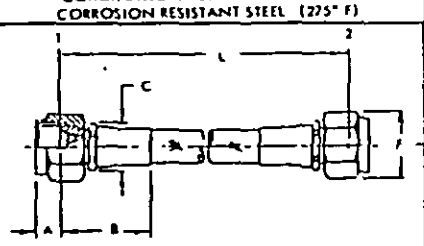

STYLE "G"


FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.		
STRAIGHT	STRAIGHT							
		-8	.438	1.465	.880	1.014		
		-10	.515	1.680	.967	1.158		
		-12	.570	1.727	1.122	1.447		
		-16	.620	2.101	1.480	1.736		
		-20	.640	2.255	1.750	2.328		
		-24	.765	2.400	2.150	2.621		

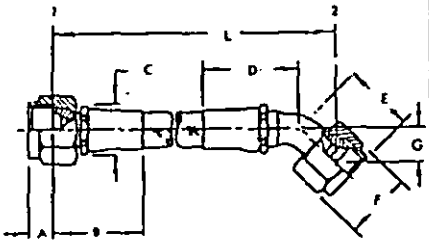

STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
STRAIGHT	45 DEG.							
		-8	.438	1.465	.880	1.722	1.332	1.014
		-10	.515	1.680	.967	2.037	1.488	1.158
		-12	.570	1.727	1.122	2.368	1.667	1.447
		-16	.620	2.101	1.480	2.583	1.879	1.736
		-20	.640	2.255	1.750	2.946	2.058	2.328
		-24	.765	2.400	2.150	3.210	2.400	2.621

HOSE SIZE	"G" MIN.	"G" MAX.
-8	.445	.632
-10	.501	.688
-12	.588	.775
-16	.609	.857
-20	.697	1.017
-24	.785	1.127

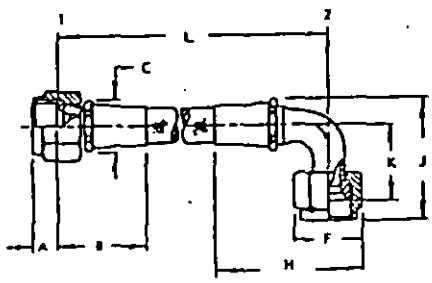

STYLE "J"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
STRAIGHT	90 DEG.							
		-8	.438	1.465	.880	1.014	2.495	1.938
		-10	.515	1.680	.967	1.158	2.955	2.340
		-12	.570	1.727	1.122	1.447	3.705	2.722
		-16	.620	2.101	1.480	1.736	4.100	3.075
		-20	.640	2.255	1.750	2.328	4.835	3.637
		-24	.765	2.400	2.150	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.
-8	.810	1.060
-10	1.091	1.341
-12	1.341	1.591
-16	1.465	1.715
-20	1.747	2.122
-24	1.997	2.372

© ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82 CUSTODIANS: ARMY-AV NAVY-AS AIR FORCE-99 DLA- REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS USER: PROJECT NUMBER: 4720-0757	MILITARY SPECIFICATION SHEET TITLE HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE	SPECIFICATION SHEET NUMBER 15 Apr 91 MS 8005C SUPERSEDING MS8005B 30 JUN 85 AMSC N/A FSC 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

Form Approved
OMB No. 0704-0188


CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275° F)

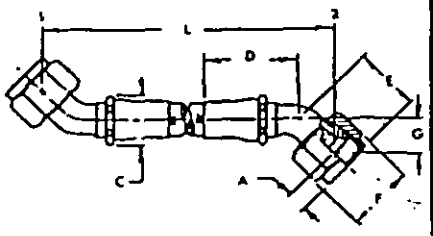

STYLE "K"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	
45 DEG.	45 DEG.							
		-8	.438	.880	1.722	1.332	1.014	
		-10	.515	.967	2.037	1.488	1.158	
		-12	.570	1.122	2.368	1.667	1.447	
		-16	.620	1.480	2.583	1.768	1.736	
		-20	.640	1.750	2.946	2.030	2.328	
		-24	.765	2.150	3.210	2.295	2.621	

HOSE SIZE	"G" MIN.	"G" MAX.
-8	.445	.632
-10	.501	.688
-12	.588	.775
-16	.625	.812
-20	.733	.933
-24	.832	1.082

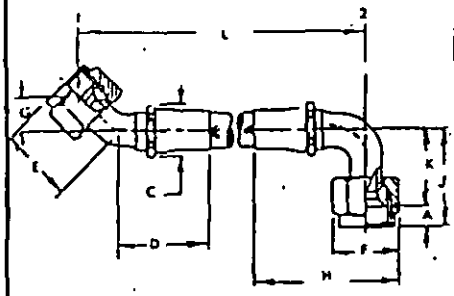

STYLE "M"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG.							
		-8	.438	.880	1.722	1.332	1.014	.445
		-10	.515	.967	2.037	1.488	1.158	.501
		-12	.570	1.122	2.368	1.667	1.447	.588
		-16	.620	1.480	2.583	1.879	1.736	.609
		-20	.640	1.750	2.946	2.058	2.328	.687
		-24	.765	2.150	3.210	2.400	2.621	.785

HOSE SIZE	"G" MAX.	"H" MAX.	"J" MAX.	"K" MIN.	"K" MAX.
-8	.632	2.495	1.938	.810	1.060
-10	.688	2.955	2.340	1.091	1.341
-12	.775	3.705	2.722	1.341	1.591
-16	.857	4.100	3.075	1.465	1.715
-20	1.017	4.835	3.637	1.747	2.122
-24	1.127	5.480	4.212	1.997	2.372

Ⓒ ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82 CUSTODIANS: ARMY - AV NAVY-AS AIR FORCE - 99 DLA- REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS USER: PROJECT NUMBER: 4720-0757	MILITARY SPECIFICATION SHEET TITLE HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE	SPECIFICATION SHEET NUMBER 15 Apr 91 MS 8005C SUPERSEDING MS8005B 30 JUN 85 AMSC. N/A FSC. 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

DD Form 672, MAY 88


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (Z75° F)

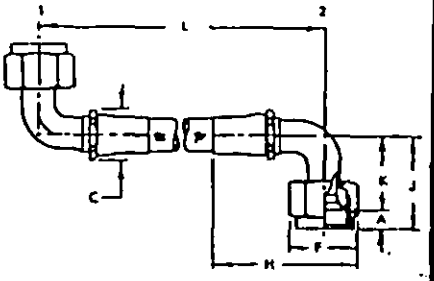

STYLE "N"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.	
90 DEG.	90 DEG.							
		-8	.438	.880	1.014	2.495	1.938	
		-10	.515	.967	1.158	2.955	2.340	
		-12	.570	1.122	1.447	3.705	2.722	
		-16	.620	1.480	1.736	4.100	3.075	
		-20	.640	1.750	2.328	4.835	3.637	
		-24	.765	2.150	2.621	5.480	4.212	

HOSE	"K" MIN.	"K" MAX.
-8	.810	1.060
-10	1.091	1.341
-12	1.341	1.591
-16	1.465	1.715
-20	1.747	2.122
-24	1.997	2.372

Ⓒ ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY- AV NAVY- AS AIR FORCE- 99 DLA-
REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS
USER:
PROJECT NUMBER: 4720-0757

MILITARY SPECIFICATION SHEET

TITLE
HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE

SPECIFICATION SHEET NUMBER 15 Apr 91
MS 8005C

SUPERSEDING
MS8005B 30 JUN 85

AMSC. N/A FSC. 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

DD Form 672, MAY 88

Source: https://assist.dla.mil ... Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL - H - 25579

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188


NOTES:

1. CONFIGURATION:
   HOSE SIZE IN HOSE ASSEMBLIES IS DESCRIBED BY LETTER INSTEAD OF NUMBER (SEE TABLE BELOW). FOR DOUBLE ELBOW HOSE ASSEMBLIES, ANGULAR ORIENTATION BETWEEN THE ELBOWS IS EXPRESSED IN THREE DIGITS. THE ANGLE IS MEASURED IN DEGREES COUNTERCLOCKWISE FROM THE CENTERLINE OF THE NEAREST FITTING WHEN THIS FITTING IS POSITIONED AT 6 O'CLOCK TO THE CENTERLINE OF THE OTHER FITTING AS SHOWN IN THE FIGURE. IF THE DESIRED ORIENTATION IS ZERO DEGREES, SPECIFY AS 000.

   LETTER DESIGNATION FOR HOSE SIZE DASH NUMBERS

HOSE ASSEMBLY SIZE	-3/-4	-4	-5	-6	-8	-10	-12	-16	-20	-24
LETTER DESIGNATION	B	E	F	G	H	J	K	M	N	P

   A -3/-4 ASSEMBLY CONSISTS OF -3 TUBE O.D. FITTINGS WITH A -4 TUBE O.D. HOSE.



2. E MAX AND J MAX ARE INSTALLATION DIMENSIONS AND NOT DESIGN DIMENSIONS.

3. STYLES G, H, J, K, M, AND N HAVE COMBINATION CRES AND ALUMINUM FITTINGS.

4. FOR "IDENTIFICATION OF PRODUCT", SEE PROCUREMENT SPECIFICATION.

   THE SWIVEL NUT AND NIPPLE END SHALL MATE WITH MS33656 FITTINGS.
   THE SWIVEL NUT THREADS SHALL CONFORM TO MIL-S-8879.
   LENGTH "L" TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

   HOSE IN ACCORDANCE WITH MIL-H-27267.

   HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

   UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH INCREMENTS. TOLERANCE ± 1/8.
   12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH INCREMENTS. TOLERANCE ± 1/8.
   OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH INCREMENTS.
   TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
   TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
   TOLERENCE FOR LENGTHS OVER 50 INCHES ± 1%.

5. THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE, AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.
   EXAMPLES OF PART NUMBER

   MS 8005 H 180 F * 030
   - 030 — HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D. 18 INCHES IN LENGTH 30° BETWEEN ELBOWS. ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLE A, B, C, G, H, AND J)
   - * — * CODE LETTER SEE BELOW
   - F — STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 6)
   - 180 — LENGTH IN EIGHTHS (1/8) OF AN INCH
   - H — LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09,08, ETC.
   - 8005 — SIZE H -8 or 1/2 INCH TUBE O.D.

   MS 8005 J 092 B *
   - * — HOSE ASSEMBLY FOR 5/8 INCH O.D. 9-1/4 INCHES IN LENGTH CODE LETTER SEE BELOW
   - B — STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 6)
   - 092 — LENGTH IN EIGHTS (1/8) OF AN INCH
   - J — LENGTH IN INCHES
   - 8005 — SIZE J -10 or 5/8 INCH TUBE O.D.

   * ADD CODE LETTER BELOW FOR ADDITIONAL FEATURES (IF REQUIRED)

   "A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
   "B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C) AS STATED PREVIOUSLY.
   "C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS STATED PREVIOUSLY.
   "D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS STATED PREVIOUSLY.
   "E" AS1298 SLEEVES, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS STATED PREVIOUSLY.
   "L" LOCKWIRE HOLE
   "F" CODE A + L
   "G" CODE B + L
   "H" CODE C + L
   "J" CODE D + L
   "K" CODE E + L

6. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN THE ANGLE OF THE BEND OF THE END FITTING ELBOW. HOWEVER, OVALITY SHALL NOT EXCEED 7-1/2 PERCENT OF THE NOMINAL TUBING O.D. DIMENSIONS FOR THE BALL, WHICH MUST PASS THROUGH THE ENTIRE LENGTH OF THE ELBOW ARE LISTED BELOW FOR THE VARIOUS SIZES AS INDICATED.

HOSE ASSEMBLY SIZE	-3/-4	-4	-5	-6	-8	-10	-12	-16	-20	-24
BALL SIZE IN INCHES	.060	.119	.174	.230	.313	.391	.515	.750	.969	1.188

7. DIMENSIONS IN INCHES.

8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

© ENTIRE STANDARD REVISED

PREPARING ACTIVITY: 82
CUSTODIANS: ARMY - AV NAVY - AS AIR FORCE - 99 DLA -
REVIEW: ARMY-AV NAVY-AS AIR FORCE-99 DLA-CS
USER:
PROJECT NUMBER: 4720-0757

MILITARY SPECIFICATION SHEET
TITLE
HOSE ASSEMBLY PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE HIGH TEMPERATURE MEDIUM PRESSURE, FLARE TO FLARE

SPECIFICATION SHEET NUMBER 15 Apr 91
MS 8005C
SUPERSEDING
MS8005B 30 JUN 85
AMSC. N/A FSC 4720

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil — Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.