DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Army -
Navy -
Air Force -
DLA -

User Activities:


Army -
Navy -
Air Force -
DLA - CR

Review Activities:

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1983


FED. SUP. CLASS 4720

CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (450°F)

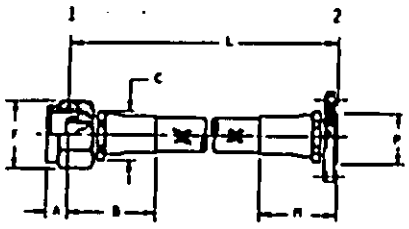


STYLE "A"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"H" MAX.	"P" MAX.
STRAIGHT	STRAIGHT							
		-8C	.318	1.640	.688	1.814	1.563	.875
		-10C	.356	1.940	.967	1.158	1.578	1.000
		-12C	.393	1.913	1.122	1.447	1.640	1.250
		-16C	.429	2.298	1.480	1.736	1.750	1.500
		-20C	.393	2.577	1.750	2.328	1.990	1.844
		-24C	.398	2.880	2.150	2.621	2.260	2.125

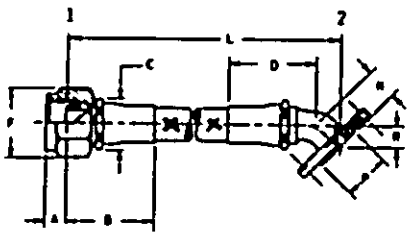


STYLE "B"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"F" MAX.	"H" MAX.	"P" MAX.	"R" MIN.	"S" MAX.
STRAIGHT	45 DEG.										
		-8C	.318	1.640	.688	1.722	1.814	.686	.875	.383	.420
		-10C	.356	1.940	.967	2.037	1.158	.650	1.000	.360	.465
		-12C	.393	1.913	1.122	2.360	1.447	.709	1.250	.433	.550
		-16C	.429	2.298	1.480	2.583	1.736	.929	1.500	.470	.657
		-20C	.393	2.577	1.750	2.946	2.328	1.028	1.844	.534	.721
		-24C	.398	2.880	2.150	3.210	2.621	1.186	2.125	.589	.839

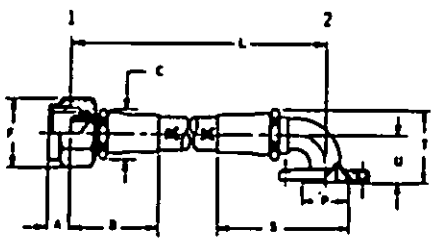

STYLE "C"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"W" MAX.
STRAIGHT	90 DEG.										
		-8C	.318	1.640	.688	1.814	.875	2.329	1.422	.657	.982
		-10C	.356	1.940	.967	1.158	1.000	2.675	1.499	.661	1.015
		-12C	.393	1.913	1.122	1.447	1.250	3.686	1.687	1.032	1.246
		-16C	.429	2.298	1.480	1.736	1.500	3.981	2.174	1.156	1.434
		-20C	.393	2.577	1.750	2.328	1.844	4.435	2.590	1.344	1.715
		-24C	.398	2.880	2.150	2.621	2.125	5.075	3.183	1.516	2.020

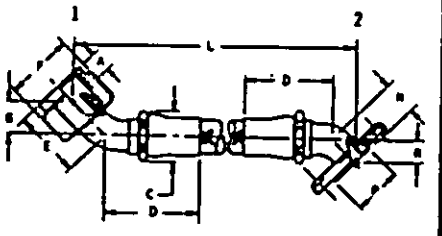

STYLE "D"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	45 DEG.							
		-8C	.318	.688	1.722	1.426	1.814	.562
		-10C	.356	.967	2.037	1.596	1.158	.631
		-12C	.393	1.122	2.360	1.729	1.447	.631
		-16C	.429	1.488	2.583	1.931	1.736	.741
		-20C	.393	1.758	2.946	2.084	2.328	.863
		-24C	.398	2.150	3.210	2.376	2.621	1.012

HOSE	"C" MAX.	"D" MAX.	"P" MAX.	"R" MIN.	"S" MAX.
-8C	.709	.686	.875	.383	.420
-10C	.877	.650	1.000	.360	.465
-12C	.952	.709	1.250	.433	.550
-16C	1.069	.929	1.500	.470	.657
-20C	1.196	1.028	1.844	.534	.721
-24C	1.376	1.186	2.125	.589	.839

P.A.	INTERNATIONAL INTEREST	TITLE
AIR FORCE-11 OTHER CUST ARMY-AV NAVY-AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE

PROCUREMENT SPECIFICATION	SUPERSEDES
MIL-H-25579	

MILITARY STANDARD

MS 8008

SHEET 1 of 10 FSC 4720


DD FORM 672

Project No. 4728-H539

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T19:08Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS 4720

CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (450°F)

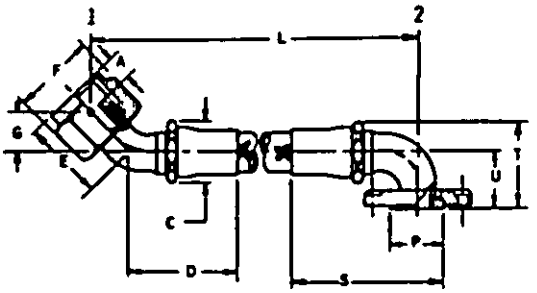


STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"P" MAX.	"G" MIN.
45 DEG.	90 DEG.							
		-8C	.319	.888	1.722	1.426	1.016	.562
		-10C	.356	.967	2.037	1.596	1.150	.631
		-12C	.393	1.122	2.368	1.739	1.447	.631
		-16C	.429	1.480	2.583	1.931	1.736	.741
		-20C	.393	1.758	2.946	2.084	2.328	.863
		-24C	.398	2.156	3.218	2.376	2.623	1.012

HOSE SIZE	"G" MAX.	"P" MAX.	"R" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8C	.789	.875	2.328	1.422	.857	.982
-10C	.877	1.000	2.875	1.499	.861	1.015
-12C	.952	1.250	3.606	1.897	1.032	1.266
-16C	1.069	1.500	3.981	2.174	1.156	1.434
-20C	1.196	1.844	4.435	2.590	1.344	1.715
-24C	1.376	2.125	5.075	3.103	1.516	2.028

Using Activities: Army - Navy - Air Force - DLA -

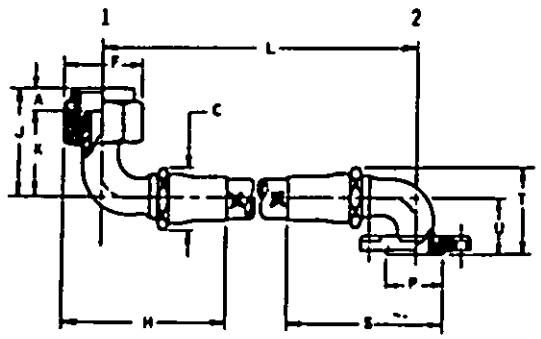

STYLE "F"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"P" MAX.	"H" MAX.	"J" MAX.	"K" MIN.
90 DEG.	90 DEG.							
		-8C	.319	.889	1.914	2.495	2.032	.938
		-10C	.356	.967	1.150	2.955	2.437	1.172
		-12C	.393	1.122	1.447	3.765	2.795	1.591
		-16C	.429	1.480	1.736	4.169	3.236	1.741
		-20C	.393	1.754	2.328	4.835	3.752	2.021
		-24C	.398	2.150	2.623	5.480	4.251	2.443

HOSE SIZE	"E" MAX.	"P" MAX.	"R" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8C	1.282	.875	2.328	1.422	.857	.982
-10C	1.607	1.000	2.875	1.499	.861	1.015
-12C	1.841	1.250	3.606	1.897	1.032	1.266
-16C	2.114	1.500	3.981	2.174	1.156	1.434
-20C	2.485	1.844	4.435	2.590	1.344	1.715
-24C	2.778	2.125	5.075	3.103	1.516	2.028

Using Activities: Army - Navy - Air Force - DLA - CR

Review Activities:

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (N) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
OTHER CUST ARMY-AV NAVY-AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE	MS 8008
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 2 of 10 . . FSC 4720

DD FORM 672


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS 4720


CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (456°F)'

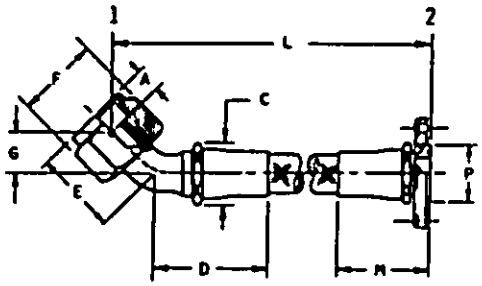

STYLE "G"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	STRAIGHT	-8C	.318	.888	1.722	1.426	1.814	.562
		-10C	.356	.967	2.037	1.596	1.158	.631
		-12C	.393	1.122	2.368	1.739	1.447	.631
		-16C	.429	1.488	2.583	1.931	1.736	.741
		-20C	.393	1.750	2.946	2.084	2.328	.863
		-24C	.398	2.150	3.210	2.376	2.621	1.012

HOSE SIZE	"G" MAX.	"H" MAX.	"P" MAX.
-8C	.789	1.560	.875
-10C	.877	1.570	1.000
-12C	.952	1.640	1.250
-16C	1.069	1.750	1.500
-20C	1.196	1.990	1.844
-24C	1.376	2.260	2.125

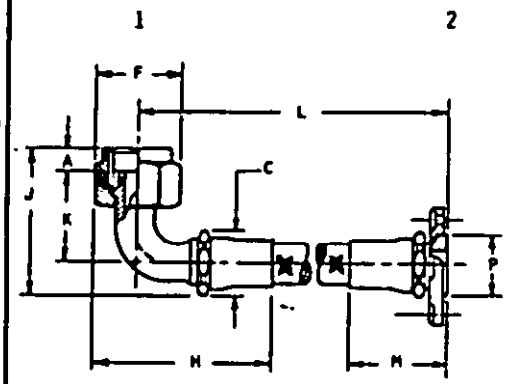

STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG.	STRAIGHT	-8C	.318	.888	1.814	2.495	2.032
		-10C	.356	.967	1.158	2.955	2.437
		-12C	.393	1.122	1.447	3.785	2.795
		-16C	.429	1.488	1.736	4.188	3.236
		-20C	.393	1.750	2.328	4.835	3.752
		-24C	.398	2.150	2.621	5.488	4.251

HOSE SIZE	"E" MIN.	"K" MAX.	"M" MAX.	"P" MAX.
-8C	.938	1.282	1.560	.875
-10C	1.172	1.687	1.570	1.000
-12C	1.591	1.841	1.640	1.250
-16C	1.741	2.114	1.750	1.500
-20C	2.021	2.485	1.990	1.844
-24C	2.403	2.778	2.260	2.125

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CR

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (Q) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.: AIR FORCE-11
OTHER CUST: ARMY-AV, NAVY-AS

INTERNATIONAL INTEREST

TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE

MILITARY STANDARD
MS 8008

PROCUREMENT SPECIFICATION: MIL-H-25579

SUPERSEDES:

SHEET 3 of 10 .FSC 4720

DD FORM 672


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (450°F)

FED. SUP. CLASS
4720

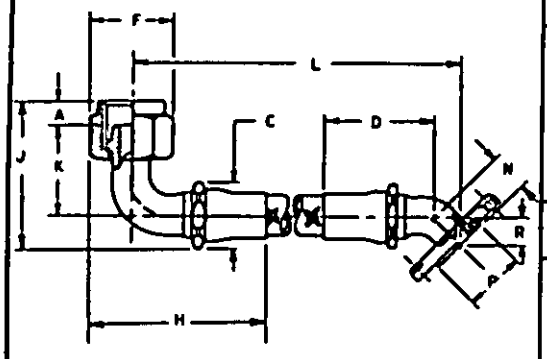

STYLE "J"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" MIN.	"C" MAX.	"D" MAX.	"F" MAX.	"N" MAX.	"J" MAX.
90 DEG.	45 DEG.							
		-8C	.310	.888	1.722	1.814	2.495	2.832
		-10C	.356	.967	2.837	1.158	2.955	2.437
		-12C	.393	1.122	2.368	1.447	3.705	2.795
		-16C	.429	1.488	2.583	1.736	4.188	3.236
		-20C	.393	1.758	2.946	2.328	4.835	3.752
		-24C	.398	2.158	3.218	2.621	5.488	4.251

HOSE SIZE	"E" MIN.	"E" MAX.	"H" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
-8C	.938	1.282	.686	.875	.303	.428
-10C	1.172	1.607	.658	1.080	.348	.465
-12C	1.391	1.841	.789	1.258	.433	.558
-16C	1.741	2.114	.929	1.588	.478	.657
-20C	2.021	2.485	1.038	1.844	.534	.721
-24C	2.403	2.778	1.186	2.125	.589	.839

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
OTHER CUST ARMY-AV NAVY-AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE	MS 8008
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 4 of 10 FSC 4720

DD FORM 672


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275°F)

FED. SUP. CLASS 4720

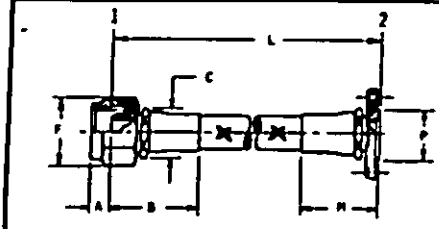


STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"N" MAX.	"P" MAX.
STRAIGHT	STRAIGHT	-8	.310	1.640	.880	1.614	1.560	.875
		-10	.356	1.940	.967	1.150	1.570	1.000
		-12	.393	1.913	1.122	1.447	1.640	1.250
		-16	.429	2.290	1.480	1.736	1.750	1.500
		-20	.393	2.577	1.750	2.328	1.990	1.844
		-24	.390	2.880	2.150	2.621	2.260	2.125

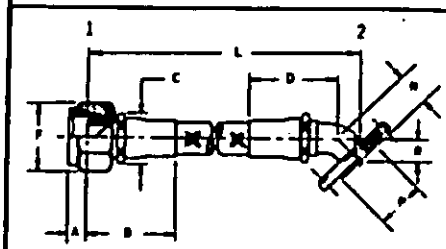


STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" MAX.	"B" MAX.	"C" MAX.	"D" MAX.	"F" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
STRAIGHT	45 DEG.	-8	.310	1.640	.880	1.722	1.614	.686	.875	.303	.428
		-10	.356	1.940	.967	2.037	1.150	.656	1.000	.340	.465
		-12	.393	1.913	1.122	2.368	1.447	.789	1.250	.433	.558
		-16	.429	2.290	1.480	2.503	1.736	.929	1.500	.478	.657
		-20	.393	2.577	1.750	2.946	2.328	1.020	1.844	.534	.721
		-24	.390	2.880	2.150	3.210	2.621	1.186	2.125	.589	.839

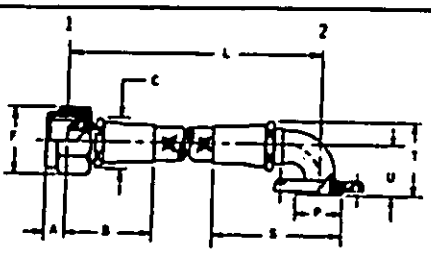

STYLE "N"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
STRAIGHT	90 DEG.	-8	.310	1.640	.880	1.614	.875	2.328	1.422	.657	.907
		-10	.356	1.940	.967	1.150	1.000	2.875	1.499	.861	1.015
		-12	.393	1.913	1.122	1.447	1.250	3.406	1.807	1.032	1.265
		-16	.429	2.290	1.480	1.736	1.500	3.981	2.174	1.156	1.434
		-20	.393	2.577	1.750	2.328	1.844	4.435	2.599	1.344	1.715
		-24	.390	2.880	2.150	2.621	2.125	5.075	3.103	1.516	2.028

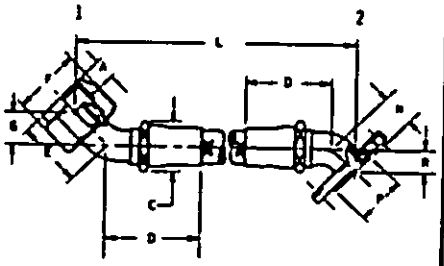

STYLE "P"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"C" MIN.
45 DEG.	45 DEG.	-8	.310	.880	1.722	1.426	1.614	.543
		-10	.356	.967	2.037	1.596	1.150	.631
		-12	.393	1.122	2.368	1.739	1.447	.631
		-16	.429	1.480	2.503	1.931	1.736	.741
		-20	.393	1.750	2.946	2.084	2.328	.863
		-24	.390	2.150	3.210	2.376	2.621	1.012

HOSE	"C" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
-8	.789	.686	.875	.303	.428
-10	.877	.656	1.000	.340	.465
-12	.952	.789	1.250	.433	.558
-16	1.069	.929	1.500	.478	.657
-20	1.196	1.020	1.844	.534	.721
-24	1.376	1.186	2.125	.589	.839

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11

OTHER CUST ARMY-AV NAVY-AS

INTERNATIONAL INTEREST

TITLE

HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE

PROCUREMENT SPECIFICATION MIL-H-25579

SUPERSEDES

MILITARY STANDARD

MS 8008

SHEET 5 of 10 FSC 4720

DD FORM 672


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. STK. CLASS 4720


CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275°F)

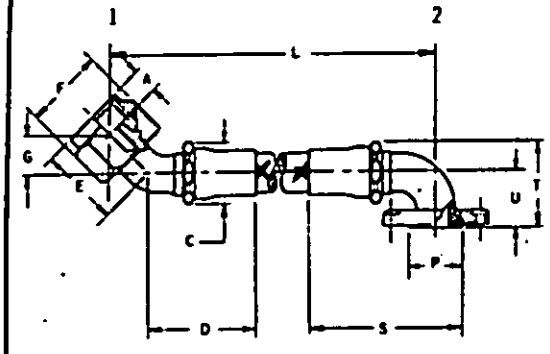

STYLE "S"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG.							
		-8	.310	.888	1.722	1.426	1.016	.562
		-10	.356	.967	2.037	1.596	1.150	.631
		-12	.393	1.122	2.368	1.739	1.447	.631
		-16	.429	1.488	2.583	1.931	1.736	.741
		-20	.393	1.750	2.946	2.084	2.328	.863
		-24	.398	2.150	3.210	2.376	2.623	1.012

HOSE SIZE	"G" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8	.789	.875	2.328	1.422	.857	.982
-10	.877	1.000	2.875	1.499	.861	1.015
-12	.952	1.250	3.686	1.887	1.432	1.246
-16	1.069	1.500	3.981	2.174	1.156	1.434
-20	1.196	1.844	4.435	2.590	1.344	1.715
-24	1.376	2.125	5.075	3.183	1.516	2.028

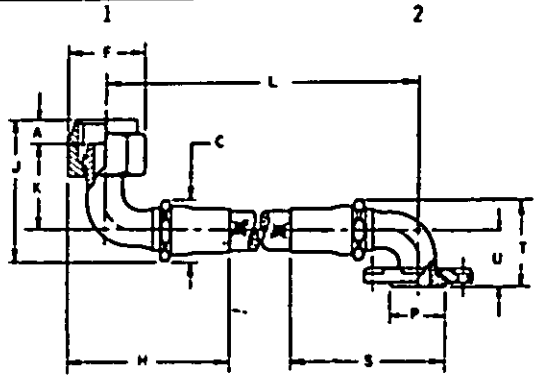

STYLE "R"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.	"K" MIN.
90 DEG.	90 DEG.							
		-8	.310	.888	1.016	2.495	2.032	.938
		-10	.356	.967	1.158	2.955	2.437	1.172
		-12	.393	1.122	1.447	3.705	2.795	1.591
		-16	.429	1.488	1.736	4.100	3.236	1.741
		-20	.393	1.750	2.328	4.835	3.752	2.021
		-24	.398	2.150	2.621	5.480	4.251	2.493

HOSE SIZE	"R" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8	1.282	.875	2.328	1.422	.857	.982
-10	1.487	1.000	2.875	1.499	.861	1.015
-12	1.661	1.250	3.686	1.887	1.432	1.246
-16	2.114	1.500	3.981	2.174	1.156	1.434
-20	2.485	1.844	4.435	2.590	1.344	1.715
-24	2.778	2.125	5.075	3.183	1.516	2.028

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11
OTHER CUST ARMY-AV NAVY-AS

INTERNATIONAL INTEREST

TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE

PROCUREMENT SPECIFICATION MIL-H-25579

SUPERSEDES

MILITARY STANDARD

MS 8008

SHEET 6 of 10 FSC 4720


DD Form 672

Project No. 4720-0539

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS 4720

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (275°F)

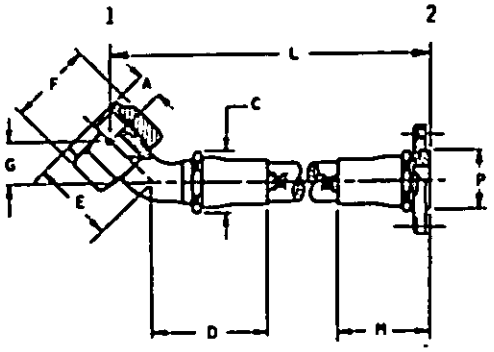


STYLE "T"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
45 DEG.	STRAIGHT						
		-8	.310	.888	1.722	1.426	1.814
		-10	.356	.967	2.037	1.596	1.158
		-12	.393	1.122	2.368	1.739	1.447
		-16	.429	1.488	2.583	1.931	1.736
		-20	.393	1.750	2.966	2.084	2.328
		-24	.398	2.150	3.218	2.376	2.621

HOSE SIZE	"G" MIN.	"G" MAX.	"M" MAX.	"P" MAX.
-8	.542	.789	1.560	.875
-10	.631	.877	1.570	1.000
-12	.631	.952	1.640	1.250
-16	.741	1.069	1.750	1.500
-20	.863	1.196	1.990	1.844
-24	1.012	1.376	2.260	2.125

Army -
Navy -
Air Force -
DLA -
User Activities:

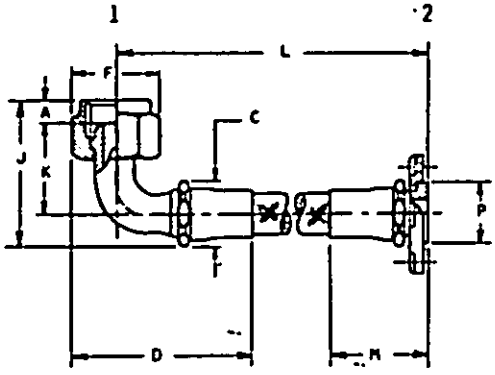

STYLE "U"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG.	STRAIGHT						
		-8	.310	.888	1.722	2.495	2.032
		-10	.356	.967	1.158	2.955	2.437
		-12	.393	1.122	1.447	3.705	2.795
		-16	.429	1.488	1.736	4.188	3.236
		-20	.393	1.750	2.328	4.835	3.752
		-24	.398	2.150	2.621	5.488	4.251

HOSE SIZE	"K" MIN.	"K" MAX.	"M" MAX.	"P" MAX.
-8	.938	1.282	1.560	.875
-10	1.172	1.607	1.570	1.000
-12	1.591	1.841	1.640	1.250
-16	1.741	2.114	1.750	1.500
-20	2.021	2.485	1.990	1.844
-24	2.483	2.778	2.260	2.125

Army -
Navy -
Air Force -
DLA - CS
Review Activities:

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.
AIR FORCE-11

OTHER CUST
ARMY-AV
NAVY-AS

INTERNATIONAL INTEREST

TITLE
HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE

MILITARY STANDARD
MS 8008

PROCUREMENT SPECIFICATION
MIL-H-25579

SUPERSEDES:

SHEET 7 of 10 FSC 4720

DD FORM 672


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (275°F)

FED. STK. CLASS 4720

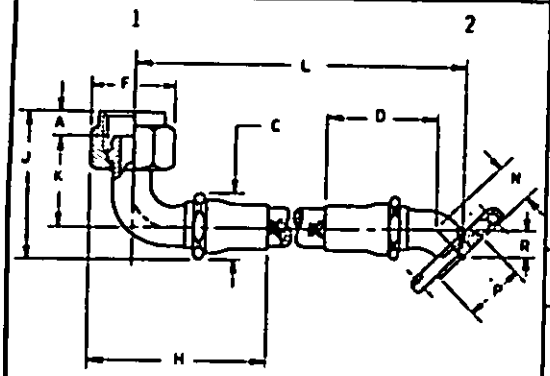

STYLE "V"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"F" MAX.	"N" MAX.	"J" MIN.
90 DEG.	45 DEG.							
		-8	.310	.888	1.722	1.814	2.495	2.032
		-10	.356	.967	2.037	1.956	2.955	2.437
		-12	.393	1.122	2.368	1.447	3.705	2.795
		-16	.429	1.488	2.583	1.736	4.188	3.236
		-20	.393	1.750	2.946	2.328	4.835	3.752
		-24	.398	2.150	3.218	2.621	5.488	4.251

HOSE SIZE	"E" MIN.	"E" MAX.	"H" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
-8	.938	1.282	.686	.875	.283	.428
-10	1.172	1.607	.658	1.000	.340	.465
-12	1.593	1.841	.789	1.250	.433	.558
-16	1.741	2.114	.929	1.500	.470	.657
-20	2.021	2.405	1.020	1.844	.534	.721
-24	2.483	2.778	1.186	2.125	.589	.839

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (A) 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE	MS 8008
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 8 of 10 FSC 4720

DD FORM 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. CONFIGURATION:

HOSE SIZE IN HOSE ASSEMBLIES IS DESIGNATED BY LETTER INSTEAD OF NUMBER (SEE TABLE BELOW). FOR DOUBLE ELBOW HOSE ASSEMBLIES, ANGULAR ORIENTATION BETWEEN THE ELBOWS IS EXPRESSED IN THREE DIGITS. THE ANGLE IS MEASURED IN DEGREES COUNTERCLOCKWISE FROM THE CENTERLINE OF THE NEAREST FITTING WHEN THIS FITTING IS POSITIONED AT 6 O'CLOCK TO THE CENTERLINE OF THE OTHER FITTING AS SHOWN IN THE FIGURE. IF THE DESIRED ORIENTATION IS ZERO DEGREES, SPECIFY AS 000.



LETTER DESIGNATION FOR HOSE SIZE DASH NUMBERS

HOSE ASSEMBLY SIZE	-8	-10	-12	-16	-20	-24
LETTER DESIGNATION	H	J	K	M	N	P

2. N MAX AND T MAX ARE INSTALLATION DIMENSIONS AND NOT DESIGN DIMENSIONS.

3. STYLES C, H, J, K, M, AND N HAVE COMBINATION CRES AND ALUMINUM FITTINGS.

4. FOR "IDENTIFICATION OF PRODUCT", SEE PROCUREMENT SPECIFICATION.

LENGTH "L" TO BE MEASURED BETWEEN CENTER OF FLANGE SEALING SURFACES ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

5. THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLES OF PART NUMBER:

MS8008H1607*030

- HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 16 INCHES IN LENGTH, 30° BETWEEN ELBOWS.
- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEET 1 THRU 6)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- SIZE H = -8 OR 1/2 INCH TUBE O.D.

MS8008J0928*

- HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 3)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES
- SIZE J = -10 OR 5/8 INCH TUBE O.D.

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CO

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (E) 30 June 1985

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE	MS 8008
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 9 of 10 FSC 4720

DD FORM 672-1

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500 (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L" LOCKWIRE HOLE
"C" CODE A + L
"C" CODE B + L
"C" CODE C + L
"C" CODE D + L
"C" CODE E + L

6. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN THE ANGLE OF THE BEND OF THE END FITTING ELBOW. HOWEVER, OVALITY SHALL NOT EXCEED 7-1/2 PERCENT OF THE NOMINAL TUBING O.D. DIMENSIONS FOR THE BALL WHICH MUST PASS THROUGH THE ENTIRE LENGTH OF THE ELBOW ARE LISTED BELOW FOR THE VARIOUS SIZES AS INDICATED.

HOSE SIZE TUBE	-8	-10	-12	-16	-20	-24
BALL SIZE IN INCH	.313	.391	.515	.758	.969	1.188

7. DIMENSIONS IN INCHES.

8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLANGE	MILITARY STANDARD MS 8008
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 10 of 10 FSC 4720

DD Form 672-1

Project No. 4720-0539

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.