
This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AT, AV, ME, MI Navy - SH

User activities: Army - MC Navy - CG, MC, OS

FED. SUP CLASS 5355

APPROVED 2 December 1955 REVISED (A) 16 May 1958 (B) 17 June 1960 (C) 19 Oct 1964 (D) 26 July 1968 (E) 20 Aug 1971

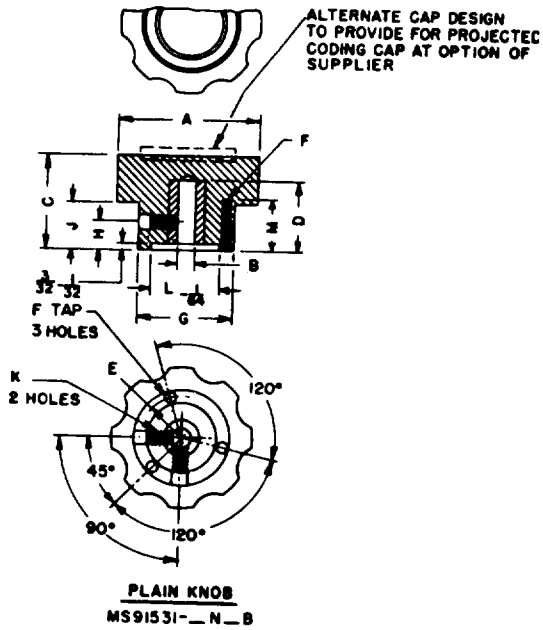

BASIC KNOBS

DASH NO.1/	SIZE (DIA OF CAP) A	SH/FT-HOLE DIA B	DIMENSIONS C	D	E	F	G	H	J	K	L	M
-1N1B -1N1G -1N2B -1N2G	3/4	0.127/0.002	1/2	3/8/1/16	---	---	5/8-1/64	5/32	1/4	No. 4-40 UNC-3B	3/8	---
-2N2B -2N2G	1-1/8	0.252/0.002	5/8	1/2/1/16	9/32	No. 2-56 UNC-3B	13/16-1/64	7/32	11/32	No. 8-32 UNC-3B	15/32	1/4
-3N2B -3N2G	1-5/8		3/4	1/2/1/8	13/32	No. 6-32 UNC-3B	1-1/8 +1/16 -1/64	1/4-1/64	3/8 +1/32 -0		3/4	7/16
-4N2B -4N2G -4B2B -4B2G	2-3/8		7/8	1/2/1/8	5/8	No. 6-32 UNC-3B	1-3/4-1/64	1/4	7/16		15/16	7/16

1/ The dash number added to the MS military-standard number constitutes the MS part number; for example, MS91531-1N1B. The dash number indicates the following: First character - knob size; second character - knob form (plain or spinner); third character - shaft-hole diameter; fourth character - "B" lusterless black No. 37038 and "G" lusterless gray No. 36231 per Fed. Std. No. 595.

(E) INACTIVE FOR NEW DESIGN AFTER 20 AUGUST 1971

(E) FOR CHANGES SEE PAGES 1 and 7

(Project 5355-0099)

P.A. EC Other Cust EL 11	TITLE KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MILITARY STANDARD MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	Page 1 OF 7

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AT, AV, ME, MI Navy - SH

User activities: Army - MU Navy - CG, MC, OS

FED. SUP CLASS 5355

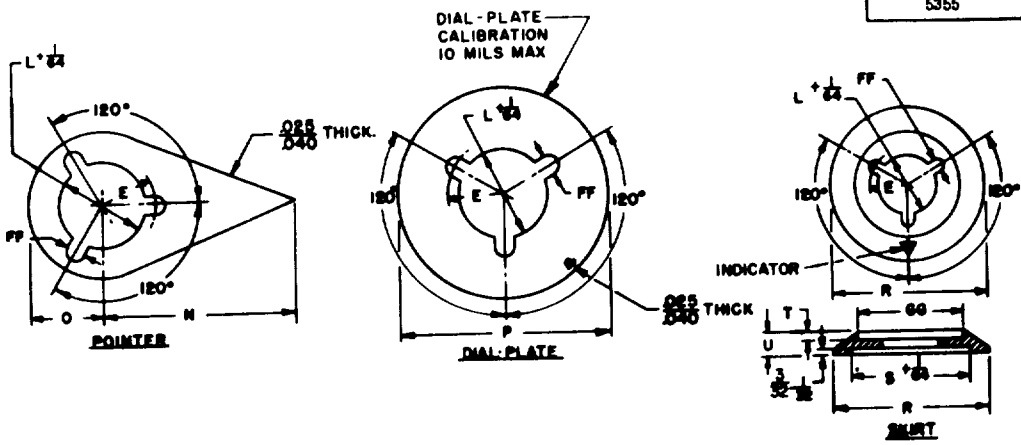

ACCESSORIES

DASH NO. 1/	ACCESSORY	DIMENSIONS										
		E	FF	GG	L	N	O	P	R	S	T	U
-1PW	Pointer	---	---	---	3/8	11/16	1/4	---	---	---	---	---
-2PW		9/32	0.092	---	15/32	1-1/32	25/64	---	---	---	---	---
-3PW		13/32	0.140	---	3/4	1-9/32	17/32	---	---	---	---	---
-4PW		5/8	0.140	---	15/16	1-11/16	3/4	---	---	---	---	---
-1HB, -1HG, -1TB, -1TG, -1AB, -1AG, -1SB, -1SG, -1QB, -1QG, -1CB, -1CG	Dial plate 2/ 3/ 4/ 5/ 6/ 7/	---	---	---	3/8	---	---	1-1/8	---	---	---	---
-2HB, -2HG, -2TB, -2TG, -2AB, -2AG, -2SB, -2SG, -2QB, -2QG, -2CB, -2CG	Dial plate 2/ 3/ 4/ 5/ 6/ 7/	9/32	0.092	---	15/32	---	---	1-3/4	---	---	---	---
-3HB, -3HG, -3TB, -3TG, -3AB, -3AG, -3SB, -3SG, -3QB, -3QG, -3CB, -3CG	Dial plate 2/ 3/ 4/ 5/ 6/ 7/	13/32	0.140	---	3/4	---	---	2-3/4	---	---	---	---

See footnotes at end of table.

APPROVED 2 December 1966 REVISED (E) For changes see pages 1 and 7

P.A. EC Other Cust EL 11	TITLE KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MILITARY STANDARD MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	Page 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AR, AV, ME, MI Navy - SH

User activities: Army - MC Navy - CG, MC, OS

FED. SUP CLASS 5355

DASH NO. 1/	ACCESSORY		DIMENSIONS										
			E	FF	GG	L	N	O	P	R	S	T	U
-1HB	Dial plate	2/	5/8	0.140	---	15/16	---	---	4	---	---	---	---
-1HQ		3/											
-1TB		4/											
-1TQ													
-1AB		5/											
-1AQ													
-1SB		6/											
-1SQ													
-1QB		7/											
-1QQ													
-1CB													
-1CQ													
-1FB	Skirt	8/	---	---	5/8-1/64	3/8	---	---	---	1-1/16	3/4	0.050	7/32
-1FQ		9/											
-1GB													
-1GQ													
-2FB		8/	9/32	0.092	13/16-1/32	15/32	---	---	---	1-1/2	7/8	0.050	7/32
-2FQ		9/											
-2GB													
-2GQ													
-3FB		8/	13/32	0.140	1-3/16	3/4	---	---	---	2-1/16	1-5/16	9/32	7/32
-3FQ		9/											
-3GB													
-3GQ													
-4FB		8/	5/8	0.140	1-3/4-1/32	15/16	---	---	---	3	1-21/32	23/32	7/32
-4FQ		9/											
-4GB													
-4GQ													

1/ The dash number added to the MS military-standard number constitutes the MS part number; for example, MS91531-1PW. The dash number indicates the following: First character - size; second character - accessory (dial plate, pointer, skirt); third character - "B" lusterless black No. 37038, "G" lusterless gray No. 36231, and "W" lusterless white No. 37875 per Fed. Std. No. 595.

2/ Dial plate calibrated clockwise 0 to 100 over 180°.

3/ Dial plate calibrated clockwise 0 to 100 over 270°.

4/ Dial plate calibrated clockwise 0 to 100 over 360°.

5/ Dial plate calibrated counterclockwise 0 to 100 over 180°.

6/ Dial plate calibrated counterclockwise 0 to 100 over 270°.

7/ Dial plate calibrated counterclockwise 0 to 100 over 360°.

8/ Indicator filled with permanent white.

9/ Indicator punched out or translucent.


APPROVED 2 December 1965 REVISED (E) For changes see pages 1 and 7

P.A. / Other Cust	TITLE	MILITARY STANDARD
EC / EL / 11	KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	Page 3


DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5355



WITH SKIRT




WITH DIAL PLATE




WITH POINTER

PLAIN KNOB ASSEMBLIES



WITH DIAL PLATE



WITH SKIRT

SPINNER KNOB ASSEMBLIES

DASH NO. 1/	SIZE (DIA OF BODY)	COMPONENT PART		NOM SHAFT-HOLE DIA
		Knob dash No.	Access. dash No.	
PLAIN KNOBS WITH SKIRTS				
-1F1B	3/4	-1N1B	-1F	1/8
-1F1G		-1N1G		
-1F2B		-1N2B		1/4
-1F2G		-1N2G		
-101B		-1N1B	-10	1/8
-101G		-1N1G		
-102B		-1N2B		1/4
-102G		-1N2G		
-2F2B	1-1/8	-2N2B	-2F	1/4
-2F2G				
-202B		-2N2G	-20	
-202G				
-3F2B	1-5/8	-3N2B	-3F	
-3F2G				
-302B		-3N2G	-30	
-302G				
-4F2B	2-3/8	-4N2B	-4F	
-4F2G				
-402B		-4N2G	-40	
-402G				
PLAIN KNOBS WITH POINTERS				
-1P1B	3/4	-1N1B	-1P	1/8
-1P1G		-1N1G		
-1P2B		-1N2B		1/4
-1P2G		-1N2G		
-2P2B	1-1/8	-2N2B	-2P	1/4
-2P2G		-2N2G		
-3P2B	1-5/8	-3N2B	-3P	
-3P2G		-3N2G		
-4P2B	2-3/8	-4N2B	-4P	
-4P2G		-4N2G		

See footnote at end of table.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Army - AT, AV, ME, MI
Navy - SH

User activities:
Army - MI
Navy - CG, MC, CS

APPROVED 2 December 1985 REVISED (E) For changes see pages 1 and 7

P.A. EC Other Cust EL 11	TITLE KNOBS, CONTROL, ROUND PLASTIC (WITH FLUTED GRIP)	MILITARY STANDARD MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	Page 4

DD FORM SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AT, AV, ME, MI Navy - SH

User activities: Army - MC Navy - CG, MC, OS

FED. SUP CLASS 5355

DASH NO. 1/	SIZE (DIA OF BODY)	COMPONENT PART		NOM SHAFT-HOLE DIA
		Knob dash No.	Access. dash No.	
PLAIN KNOBS WITH DIAL PLATES				
-1H1B	3/4	-1N1B	-1H	1/8
-1H1G		-1N1G		
-1H2B		-1N2B		1/4
-1H2G		-1N2G		
-1T1B		-1N1B	-1T	1/8
-1T1G		-1N1G		
-1T2B		-1N2B		1/4
-1T2G		-1N2G		
-1A1B		-1N1B	-1A	1/8
-1A1G		-1N1G		
-1A2B		-1N2B		1/4
-1A2G		-1N2G		
-1S1B		-1N1B	-1S	1/8
-1S1G		-1N1G		
-1S2B		-1N2B		1/4
-1S2G		-1N2G		
-1Q1B		-1N1B	-1Q	1/8
-1Q1G		-1N1G		
-1Q2B		-1N2B		1/4
-1Q2G		-1N2G		
-1C1B		-1N1B	-1C	1/8
-1C1G		-1N1G		
-1C2B		-1N2B		1/4
-1C2G		-1N2G		
-2H2B	1-1/8	-2N2B -2N2G	-2H	1/4
-2H2G				
-2T2B			-2T	
-2T2G				
-2A2B			-2A	
-2A2G				
-2S2B			-2S	
-2S2G				
-2Q2B			-2Q	
-2Q2G				
-2C2B			-2C	
-2C2G				
-3H2B	1-5/8	-3N2B -3N2G	-3H	1/4
-3H2G				
-3T2B			-3T	
-3T2G				
-3A2B			-3A	
-3A2G				
-3S2B			-3S	
-3S2G				
-3Q2B			-3Q	
-3Q2G				
-3C2B			-3C	
-3C2G				
-4H2B	2-3/8	-4N2B -4N2G	-4H	1/4
-4H2G				
-4T2B			-4T	
-4T2G				
-4A2B			-4A	
-4A2G				
-4S2B			-4S	
-4S2G				
-4Q2B			-4Q	
-4Q2G				
-4C2B			-4C	
-4C2G				

See footnote at end of table.

APPROVED 2 December 1955 REVISED (E) For changes see pages 1 and 7

P.A. EC Other Cust EL 11	TITLE KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MILITARY STANDARD MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	Page 5

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AT, AV, ME, MI Navy - SH

User activities: Army - MU Navy - CG, MC, OS

FED. SUP CLASS 5365

DASH NO. 1/	SIZE (DIA OF BODY)	COMPONENT PART		NOM SHAFT-HOLE DIA
		Knob dash No.	Access. dash No.	
SPINNER KNOBS WITH DIAL PLATES				
-4T2B	2-3/8	-4B2B -4B2G	-4H	1/4
-4T2G			-4T	
-4K2B			-4A	
-4K2G			-4S	
-4L2B			-4Q	
-4L2G			-4C	
-4M2B				
-4M2G				
-4G2B				
-4G2G				
-4R2B				
-4R2G				
SPINNER KNOBS WITH SKIRTS				
-4V2B	2-3/8	-4B2B -4B2G	-4F -4O	1/4
-4V2G				
-4W2B				
-4W2G				

1/ The dash number added to the MS military-standard number constitutes the MS part number; for example, MS91531-1F1B. The dash number indicates the following: First character - knob size; second character - accessory (dial plate, pointer, skirt, spinner); third character - shaft-hole diameter; fourth character - "B" lusterless black No. 37038 and "G" lusterless gray No. 36231 per Fed. Std. No. 595.

APPROVED 2 December 1966 REVISED (E) For changes see pages 1 and 7

P.A. Other Cust	TITLE	MILITARY STANDARD
EC EL 11	KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MS 91531
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	Page 6

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.

1. All dimensions in inches.

2. Unless otherwise specified, tolerances are ± 1/64 on fractions, ± 0.005 on decimals, and ± 1° on angles.

3. Materials:

Knob (including spinner body) skirt, and pointer - Plastic, type III, per Specification L-P-398, or type CFG, per Specification MIL-M-14.

Dial plate - Aluminum per Specification QQ-A-250/8 or QQ-A-250/1, or brass per Specification QQ-B-613; color lusterless black No. 37038 per Fed. Std. No. 595.

Set screws - Cadmium plating, class 3, type II, per Specification QQ-P-416, or zinc plating, class 3, type II, per Specification QQ-Z-325.

Knob inserts - Brass, composition 22, per Specification QQ-B-626, with class 3, type II, cadmium plating, per Specification QQ-P-416, before assembly; or aluminum alloy,7075 T6, per Specification QQ-A-277, anodized per Specification MIL-A-8625, before assembly.

Spinner insert - Brass, composition 22, per Specification QQ-B-626, with type VI nickel matte finish, per Specification QQ-N-290.

4. Knobs are cored or solid. If cored, the set screws may be placed in the supporting ribs.

5. Break all sharp edges of upper gripping surfaces.

6. Knob assemblies may be furnished as integral units or as assemblies. When 3/4 knobs are furnished as assemblies, the parts are cemented together. For all other knobs, the parts are fastened together by screws as shown on sheet 4. For pointer knobs, the screw assembly may be omitted, and the inserts spun over, in which case they are staked.

7. Set screws - Type 1, style 4, per Specification FF-S-200; No. 4-40 UNC-3A is used for all 3/4 knobs and for 1/8 shafts; No. 8-32 UNC-3A is used for 1/4 shafts; 3/16 long for 3/4 knobs, 1/4 long for 1-1/8 knobs, 5/16 long for 1-5/8 knobs, and 3/8 long for 2-3/8 knobs.

8. Assembly screws - Pan head; MS part No. MS35214-3 for 1-1/8 knobs, and MS part No. MS35214-25 for all other size knobs.

9. Insert-wall thickness - 1/16 minimum for 3/4 and 1-1/8 knobs, and 1/8 minimum for 1-5/8 and 2-3/8 knobs. Inserts are open end or closed end.

10. Torque test - 25 pound-inches for all knobs up to and including 1-1/8 nominal body diameter and 50 pound-inches for all knobs above 1-1/8 nominal body diameter. For all diameter knobs with spinners, a 50 pound-inch force is applied to the end of the spinner handle, perpendicular to the plane of the two axes.

11. The impact test shall be in accordance with Specification L-P-398 or MIL-M-14, as applicable, in lieu of the impact test of MIL-K-3926.

12. Referenced documents shall be of the issue in effect on date of invitations for bid.

13. This standard takes precedence over documents referenced herein.

(E) 14. Qualification not applicable.

APPROVED 2 December 1955 REVISED (E) For changes see pages 1 and 7

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army - AT, AV, ME, MI Navy - SH

User activities: Army - MU Navy - CG, MC, OS

P.A. EC	TITLE KNOBS, CONTROL, ROUND, PLASTIC (WITH FLUTED GRIP)	MILITARY STANDARD
Other Cust EL 11		MS 91531
Procurement Specification MIL-K-3926	SUPERSEDES:	Page 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.