MIL-A-43820B(GL)
26 June 1981
SUPERSEDING
MIL-A-43820A(GL)
7 March 1975

MILITARY SPECIFICATION

AIR LOCK, (MUST)

This specification is approved for use by Natick Research and Development Laboratories, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an air lock fabricated from coated cloth and supported by aluminum bow frames. One end of the air lock is open, the other end has a detachable door assembly. The air lock, raised hemicylindrical in shape, has the following dimensions: length 11 feet, width 5 feet, height 7 feet. Also covered is an erection kit and air lock light assembly (see 6.2, 6.6 and 6.7).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
TT-E-527	-	Enamel, Alkyd, Lustreless
TT-E-529	-	Enamel, Alkyd, Semi-Gloss
TT-P-1757	-	Primer Coating, Zinc Chromate, Low Moisture Sensitivity
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currentversion before use.

MILITARY

MIL-P-501	-	Pins, Tent, Metal
MIL-A-3962	-	Anchors, Ground, Arrowhead with Driving Equipment
MIL-C-5541	-	Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-C-43285	-	Cloth, Coated (Chloroprene Base Coated, Chlorosulphonated Polyethylene Top Coated)

STANDARDS

FEDERAL

FED-STD-595	-	Colors
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of US Military Property
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MS 20604	-	Rivet, Blind Nonstructural, Universal Head, Class 1

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

5-4-3547	-	Drawing List
5-4-3548	-	Air Lock (MUST); Assembly Complete
5-4-3549	-	Assembly and Details "A"
5-4-3550	-	Assembly and Details "B"
5-4-1605	-	Light Assembly
5-4-1606	-	Electrical Junction Box and Light Guard Assembly
5-4-1607	-	Receptacle Bracket Assembly Gasket and Junction Box Cover
5-4-1682	-	Door Blackout Curtain Assembly
5-4-1332	-	Shelter - Multi Purpose (MUST): Anti-Backdraft Valve Assembly
5-4-1333	-	Damper and Grill Assemblies
5-4-1570	-	Bow Spike Assembly
5-4-1587	-	Bow Assembly
5-4-1759	-	Light Assembly "B"

(Miniature copies of Drawings 5-4-3547, 5-4-3548 and 5-4-3549 identified as figures 1 through 3, are attached for information purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

AEROSPACE MATERIAL SPECIFICATION (AMS)

AMS 2672 - Brazing Aluminum

(Application for copies should be addressed to Society of Automotive Engineers, Inc., 485 Lexington Avenue, New York, NY 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 Alternate components. Components shall be as specified on the applicable drawings and as specified herein. For components for which it is stated "or equal", if the contractor proposes to use an item considered to be equal to the component specified, prior to its use the contractor shall furnish a sample of the component, with supporting data to the contracting officer for subsequent evaluation by the responsible military agency. The supporting data required shall prove the functional equivalence and design compatibility of the item proposed to be used. Prior to manufacture of the first article, or if none is required, prior to commencing production, the contractor shall submit for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified herein. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of the first article of production manufacture, as applicable, and does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:27Z
Check the source to verify that this is the currentversion before use.

* 3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.3 Inspection comparison testing sample. When specified (see 6.2), the contractor shall furnish a sample for comparison inspection and approval (see 4.4 and 6.4).

3.4 Materials and components. Materials and components shall conform to the specifications and drawings listed in section 2 and as specified herein (see 6.8).

* 3.4.1 Cloth, polyester, coated. The coated polyester cloth shall be as specified on the applicable drawing, with the following exceptions:

a. That the adhesive used in preparing only the adherability test specimens requirements of MIL-C-43285, shall be as specified in 3.4.5.

b. That the type I, class 1 coated fabric shall meet the 200°F adherability requirement of MIL-C-43285 with not more than 1/16 inch slippage.

3.4.2 Thread, polyester. All thread shall conform to type I, class 1, subclass B of V-T-285. Dyed thread shall match Olive Drab S-1 (CA 66022) and shall show fastness to weathering equal to or better than the standard shade sample. When no standard shade sample is available, the dyed thread shall show good fastness to weathering. Thread sizes shall be as specified on the drawing.

3.4.3 Overcoating materials. Materials used for overcoating, (see 3.5.8), shall be air dry coatings meeting color and compositional requirements of the green top coating and pale green top coating of MIL-C-43285. When applied to a sample of coated cloth, as used in the air lock, and dried, the resulting sample shall meet the requirements in MIL-C-43285 for blocking resistance and flame resistance.

* 3.4.4 Dusting compound. The dusting compound shall be whiting, talc, or other finely divided mineral material. The compound shall not support mildew growth. The contractor shall submit a certificate of compliance to the contracting officer that the dusting compound conforms to these requirements (see 4.5.1.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:27Z
Check the source to verify that this is the current version before use.

* 3.4.5 Adhesive. The adhesive shall be as specified on Drawing 5-4-3548. Containers of the adhesive base and the curing agent shall be marked with the manufacturer's batch number and an expiration date and shall be stored in an area where the temperature shall not exceed 70°F. The batch number identifies that quantity of material manufactured at the same time using the same raw materials or subjected to some unit chemical or physical mixing process intended to make the final product homogenous. The expiration date, date after which the adhesive or curing agent shall not be used, shall be three months after the date of manufacture. In addition, containers of adhesives and curing agent received in one shipment, shall be identified and segregated to insure their use prior to later deliveries. Before use, each lot of adhesive and curing agent shall be tested for dead load shear strength and dead load peel strength. The adhesive mix shall brush out smoothly without producing drag or showing stringiness. An adhesive lot is approved for use during the 14 days following the date of acceptance (see 4.5.1.1). At the end of the 14 day period, unused adhesive may be retested as long as the expiration date of the adhesive and the curing agent has not been reached.

3.4.5.1 Dead load shear strength. There shall be not more than 1/16 inch slippage at 200°F when the adhesive is tested as specified in 4.7.1. This requirement is for all adhesives.

* 3.4.5.2 Dead load peel strength. There shall be not more than 1/2 inch peel at a room temperature when the adhesive is tested as specified in 4.7.1.2. This requirement is only for strapping, patching and splicing adhesive.

3.4.6 Anchoring components.

3.4.6.1 Pins, tent, metal. Metal tent pins shall conform to type II of MIL-P-501.

3.4.6.2 Anchor, ground. Ground anchors shall conform to type II, grade B of MIL-A-3962. Driving rods, driving heads and holding handles shall conform to MIL-A-3962.

3.4.6.3 Spike, bow. Bow spikes shall be as shown on Drawing 5-4-1570, Part No. 5-4-1570-1.

3.5 Design and construction. Air locks shall conform to the drawings listed in section 2 and as specified herein.

3.5.1 Coated cloth components. All visible outside cloth surfaces of the air lock shall be olive green and all visible inside surfaces shall be pale green.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

3.5.1.1 Body, end panel, flaps and blackout curtains. The air lock body, door assembly end panel, blackout curtains, electrical access cover flaps and slide fastener stringer flaps shall be fabricated from the class 3 coated cloth specified in 3.4.1.

3.5.1.2 Sod cloth, tent pin, bow support and reinforcing patches. The sod cloths, tent pin patches, outside reinforcing patches and bow support patches shall be fabricated from the class 1 coated cloth specified in 3.4.1.

3.5.1.3 Inside patches, reinforcing tape. The inside patches, light fixture patch assemblies, door assembly reinforcing tapes and inside tie patch assemblies shall be fabricated from the class 2 coated cloth specified in 3.5.1.

3.5.2 Stitching, machine. All stitching shall conform to type 301 of FED-STD-751, 5 to 7 stitches per inch.

3.5.2.1 Thread breaks. Thread breaks shall be overstitched not less than 1 inch at each break. Any thread break noted during inspection shall be repaired by overstitching the existing stitching, starting from a distance of 1 inch before the break, across the defective area, to a distance of 1 inch beyond the break. The ends of repair stitching are not required to be backstitched.

3.5.2.2 Stitching ends. The ends of stitching shall be overstitched not less than 1 inch except where ends are turned under in a hem, held down by other stitching or where stitching is performed automatically. When stitching is performed automatically on stitch patterns such as box and box with cross-stitch, 3 or more tying, overlapping or backstitches shall be used to secure the ends.

* 3.5.2.3 Repair of skipped stitches or run-offs. Two or more consecutively skipped stitches or run-off stitches shall be repaired by overstitching. Overstitching shall be accomplished for a distance of not less than 1 inch before, to a minimum of 1 inch beyond, the affected area of skipped stitches or run-offs.

3.5.2.4 Lubrication of thread. The addition of any lubricant to the polyester thread prior to or during the sewing operation is prohibited. Water or air spraying for needle cooling is permissible.

3.5.3 Setting of rivets. Rivets shall be securely set and neatly headed.

3.5.4 Setting of grommets. Holes punched to receive grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

3.5.5 Setting of snap fasteners. If a hole is punched before inserting the male or female part of the fastener, it shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. The fasteners shall be securely clinched.

3.5.6 Fusing of webbing ends. Cut ends of nylon webbing shall be fused and, after fusing, shall be free from frayed edges and loose fibers.

3.5.7 Fusing of polyester and nylon cord. Cut ends of braided cords shall be fused to prevent fraying.

* 3.5.8 Cementing. Cementing of assemblies shall be in accordance with the following procedure:

a. Surface preparation. Surfaces to be bonded shall be clean and dry prior to application of the adhesive. Coated cloth surfaces to be bonded shall be thoroughly cleaned by rubbing with toluene-wetted clean cloths or pads, which may contain a mild, bonded abrasive of 80, or finer, grit size or may be of a coarse weave (as for scouring). If abrading is exercised, there shall be no scuffing or abrading of the polyester base cloth. Separate clean cloths and clean solvent shall be used for final cleaning wipes. Abrasive coated cloths or pads shall not be used directly on stitching at seams. Foam surfaces to be bonded to coated fabric need not be cleaned unless soiled or dust ladened. Uncoated sides of fabric being bonded (bladders, inner casing patches, etc.) shall be toluene-cleaned using a clean cloth and clean toluene and allowing the surfaces to dry.

b. Adhesive mixing. The ratio of the adhesive mixture shall be as specified on the drawings. Prior to extracting quantities of the base and accelerator to be mixed, any settlement shall be uniformly redispursed. Containers for mixing, transfer and use shall be clean prior to each filling. Adhesive in the containers shall be covered during transit to work stations and during sustained periods of non-use to prevent loss of solvent by evaporation. After mixing, the adhesive shall be used only while sufficiently spreadable to obtain an even coat. A mix tending to produce drag or showing stringiness when being brushed out has started to cure and must be discarded.

c. Adhesive application. Except for coated cloth-foam laminates, a minimum of two coats of mixed adhesive shall be evenly spread on the cleaned surfaces to be bonded. The first coat shall be dry to the touch before the application of the second coat. Prior to assembly, the adhesive coated surfaces shall not be allowed to be contaminated by a visible layer of dust or other foreign matter. Applied adhesive shall be free of heavy smears or excessively thick lap edges (resulting from insufficient spreading), thin starved areas, uncoated areas or other defects characteristic of improper application. The second coat shall be dried as appropriate for the assembly method to be use; i.e., to a tacky (not wet) aggressive grab condition for the two-way, dry stick method; or to a low-tack (dry condition)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currenversion before use.

for two-way stick, solvent reactivation method. Adhesive application on coated cloth-foam laminates shall be either in one coat application to each surface followed by two-way, dry stick assembly, or in one heavy coat application followed by wet-tack assembly.

d. Assembly. Assembly of components shall be made when the tack and grab of the adhesive coated surfaces are in a suitable range and a condition of either excess solvent in the adhesive layers or excessive drying or open time shall be avoided. Surfaces shall be joined in the locations specified on the drawings, applying adequate pressure and rolling or barring firmly to produce an adequate bond. Care shall be exercised to avoid finger contact in the adhesive coated areas along the edges of seams, patches, or other bonded parts. Precautions should be taken to prevent adhesive application, assembling or curing of an assembly at a temperature below 60°F. The assembled work shall not be moved too soon or in such a way as to result in edge lifting or a decreasing strength of bond until the adhesive has set. Surfaces shall be assembled on the same day that they were coated, or a third coat of adhesive shall be applied to each surface. When surfaces have been assembled in an incorrect location, the adhesive bond may be immediately separated and reset at the proper location. To facilitate separation, toluene may be applied at the bond line by brush or swab and the component then peeled away as the adhesive softens. The excess toluene solvent shall be allowed to evaporate before resetting the surfaces. When incorrectly located parts are separated and the adhesive is not in an active condition or has transferred to the other surface, the affected surface shall be given an additional coat of adhesive before reassembling. Any adhesive residue shall not extend further than 1/2 inch beyond the edges of seams, strapping, splices, patches or other bonded parts. Any exposed adhesive with the 1/2 inch allowance shall be overcoated with material specified in 3.4.3. Overcoated areas shall be dusted with the dusting compound specified in 3.4.4. There shall be no unsightly smearing or spreading of adhesive or overcoating and care shall be exercised to insure that surrounding areas are kept clean.

* 3.5.9 Light assembly. The light assembly shall be as shown on Drawing 5-4-1605 or 5-4-1759 (see 6.2 and 6.7).

3.5.10 Welding. All welding shall be as specified on the drawings. Materials to be welded shall be clean and free from scale, corrosion, oil, water and other foreign matter. Welds shall be sound, smooth, free from flash and shall show good fusion. All scale and flux shall be removed from finished area.

3.5.11 Kit, erection. Unless otherwise specified (see 6.2 and 6.7), an erection kit, consisting of the following components, shall be furnished with each air lock assembly:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

Item	Quantity	Reference
Pin, tent, metal, type II	8	3.4.6.1
Anchor, ground, arrowhead, type II, grade B	14	3.4.6.2
Driving rod, head and holding handle	1 each	3.4.6.2
Spike, bow	6	3.4.6.3

3.6 Finish of metal components.

3.6.1 Bow assemblies, light assemblies. All surfaces of the bow assemblies and air lock light assemblies to be painted shall be treated, primed and finished as specified on the drawings.

3.6.2 Anti-backdraft valve assembly. Prior to painting, all aluminum surfaces to be painted shall be cleaned and prepared in accordance with class 1A of MIL-C-5541. After surface preparation, all metal surfaces shall be coated with primer conforming to composition G or L, color T of TT-P-1757. When primer is dry, all exterior surfaces shall be coated with enamel conforming to TT-E-527, Olive Drab color No. 34087 of FED-STD-595. Interior surfaces shall be coated with enamel conforming to TT-E-529, Pale Green color No. 24554 of FED-STD-595.

3.6.3 Door assembly. All aluminum surfaces of the door assembly shall be cleaned and treated in accordance with class 1A of MIL-C-5541.

3.6.3.1 Doors. After surface treatment, all metal surfaces shall be coated with a primer conforming to TT-P-1757, composition G or L, color T. When the primer is dry, all exterior surfaces shall be coated with enamel conforming to TT-E-527, Olive Drab color No. 34087 of FED-STD-595. All interior surfaces shall be coated with enamel conforming to TT-E-527, Pale Green color No. 24554 of FED-STD-595.

3.6.3.2 Frame. Those frame surfaces where coated cloth panels or tapes are to be cemented shall be primed as indicated on Drawing 5-4-3548.

* 3.6.4 Finish of metal components. All metal components shall be finished as specified on the drawings. Finish painted coats shall level out to an adherent, continuous and uniform film without runs, wrinkles, streaks or areas of no film. Any coating damaged during assembly or examination shall be touched up by priming and painting as on prescribed drawings.

3.7 Marking.

3.7.1 Nomenclature. The application of the letter "US" and the nomenclature marking on the air lock shall conform to type IV, class 9 of DDD-L-20, in the size characters and locations shown on the drawings. Class 9 markings shall be clearly legible after subjection to accelerated weathering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

3.7.2 Identification labels. Identification labels shall conform to type VI, class 6 of DDD-L-20 and shall be 3-1/2 inches by 5-1/2 inches minimum with a blank space of at least 1-1/4 inches provided on the bottom of the label for the Department of Defense inspector's stamp. Identification labels shall be stitched to the air lock in the location shown on the drawing.

3.7.3 Identification marking. Bow assemblies, air lock light assemblies and door assemblies shall be marked for identification in accordance with MIL-STD-130.

3.8 Workmanship. Cloth components shall be free of holes, cuts, or tears, thin or weak places caused by abrasion, exposed fabric, blisters, tunnels or delamination of coating, creases, wrinkles or coating missing. Webbing shall contain no frayed or scalloped edges. Cord and rope components shall be free of cuts, abrasions or breaks. Thread tension shall be maintained so that there will be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no run-offs, pleats or open seams shall result. Care shall be taken in sewing so that there shall be no needle chews. All thread ends shall be trimmed to 1/2 inch or less. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed. Cemented areas shall be free of puckers, loose edges, unadhered pockets or tunnels. There shall be no unsightly smearing or spreading of adhesive and care shall be exercised to insure that surrounding areas are kept clean and free from excess adhesive, stains or discoloration of coated cloth.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article (see 4.3)
b. Initial inspection comparison (see 4.4)
c. Quality conformance inspection (see 4.5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required (see 6.2) it shall be examined for the defects specified in 4.5.3.1 through 4.5.3.5, and tested as specified in 4.5.1.1. The presence of any defect shall be cause for rejection of the lot.

4.4 Comparison sample inspection. When a comparison sample is required, the air lock assembly shall be examined for the defects as specified in 4.5.3.1 through 4.5.3.6. The presence of any visual defect or any dimension not within the specified requirements shall be cause for rejection of the comparison sample.

4.5 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.5.1.1 Adhesive testing. Each lot of adhesive shall be tested as specified in 4.7.1.1 for dead load shear strength, and as specified in 4.7.1.2 for dead load peel strength. The inspection lot of adhesive shall consist of all containers of adhesive base from the same batch, and all containers of accelerator from the same batch. The quantities of base and accelerator making up the lot shall be appropriate for production use within the prescribed 14 days usage limitation as specified in 3.4.5. The sample unit for the dead load shear test shall be one cloth lap seam and two determinations shall be made per sample lap seam. The sample unit for the dead load peel test shall be one cloth laminate and one determination shall be made per sample laminate. Any nonconformance to the requirements of 3.4.5.1 or 3.4.5.2 shall be cause for rejection of the representative lot of adhesive. Containers of the adhesive base and the accelerator for each acceptable lot of adhesive shall be marked with the 14 day usage date and with a lot identity.

4.5.1.2 Dusting compound certification. The certificate of compliance submitted as proof of compliance with the dusting requirements in 3.4.4 shall be examined and validated.

4.5.2 In-process inspection. Examination shall be made of the following fabrication processes to establish conformance with specified requirements. Whenever nonconformance is noted, correction shall be made to the process and all items processed.

a. That the color of all visible exterior and interior surfaces or coated cloth components and assemblies are in compliance with 3.5.1.

b. That no lubrication is applied to the polyester thread prior to or during sewing operations for compliance with 3.5.2.4.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:27Z
Check the source to verify that this is the currentversion before use.

c. That holes punched to receive grommets are in compliance with 3.5.4.

d. That holes punched to receive snap fasteners are in compliance with 3.5.5.

e. That wiring of the light assembly is in compliance with the schematic wiring diagram shown on Drawing 5-4-1605 or 5-4-1759 (see 6.2 and 6.7).

f. That use of the adhesive is in accordance with cementing instructions specified in 3.5.9.

g. That welds and welding are in compliance with 3.5.1 and the drawings.

h. That bow assemblies and light assembly components are chemically treated, prior to priming, as specified on the drawings.

i. That priming of bow assemblies and light assemblies is as specified on the drawings.

j. That anti-backdraft valve assembly components are chemically treated, prior to priming, for compliance with 3.6.2.

k. That priming of anti-backdraft valve assembly components is as specified in 3.6.2.

l. That door assembly components are chemically treated, prior to priming, for compliance with 3.6.3.

m. That priming of doors is as specified in 3.6.3.1.

n. That those frame surfaces where cementing to cloth components is to be effected are coated with the cement primer, for compliance with 3.6.3.2.

o. That tent pin patches and tie patches are constructed as specified on the drawings.

4.5.3 End item inspection. The inspection lot shall be all air lock assemblied offered for inspection at one time. The sample unit shall be one air lock assembly.

4.5.3.1 Visual examination of air lock body assemblies. The air lock body assemblies with doors shall be examined for defects in table I. The inspection level shall be II and the acceptable quality level (AQL) shall be 15.0 major, 65.0 major and minor A combined, and 100.0 total (major, minor A and B combined) defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

TABLE I. Air lock body assembly visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Cloth, coated	Hole, cut, or tear	X		
	Exposed fabric, delamination of coating	X		
	Crease, wrinkle, blister, tunnel, scratch, or abrasion		X	
	Lump or heavy coated area			X
Webbing	Frayed or scalloped edge			X
	End not fused			X
Cord	Cut or abrasion		X	
	End not fused			X
Rope components	Cut or break	X		
Hardware	Broken	X		
	Malformed:			
	-fails to perform intended function	X		
	-but will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Grommets	Improperly set, two or more teeth exposed			X
	Clinched loosely, allowing grommet to rotate around hole			X
	Clinched excessively tight, i.e., cutting fabric	X		
	Insecurely clinched, i.e., grommet or washer becomes disengaged	X		
Cementing	Puckers, loose edges, unadhered pockets or tunnels		X	
	Excess adhesive in sage or lumps evident through outer layers of fabric		X	
	Exposed adhesive beyond the overcoated area:			
	-on exterior surface			X
	-on interior surface		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

TABLE I. Air lock body assembly visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	Open seams:			
	-1/2 inch or less			X
	-more than 1/2 inch, but not more than 1 inch		X	
	-more than 1 inch	X		
	NOTE: A seam shall be classified as open when one or more stitches are broken, or when one or more skipped or run-off stitches occur. On double-stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			
	Thread breaks overstitched less than 1 inch		X	
	Needle chews resulting in cut, tear, or hole	X		
	Skipped stitches or run-offs overstitched less than 1 inch (where two or more consecutively skipped stitches occur)			X
	NOTE: Skipped stitches and run-offs not overstitched shall be classified as open seams.			
Seam type	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread for more than 6 inches in length			X
	Tight as evidenced by puckering on seams for more than 6 inches in length			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the current version before use.

TABLE I. Air lock body assembly visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitches per inch	Less than minimum specified:			
	-one stitch			X
	-two or more stitches		X	
	More than maximum specified:			
	-one stitch			X
	-two or more stitches		X	
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or in turning corners, shall be classified as follows:			
	a. Within the minor "B" defect classification - no defect			
	b. Within the minor "A" defect classification - minor "B" defect			
Stitching margin	Larger than specified by more than 1/8 inch:			
	-for more than 1 inch, but not more than 4 inches in length			X
	-for more than 4 inches in length		X	
	Less than specified:			
	-for more than 1 inch but not more than 4 inches in length			X
	-for more than 4 inches in length		X	
Stitching gage	Not as specified		X	
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching or turned under in a hem or where stitching is performed automatically)			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currentversion before use.

TABLE I. Air lock body assembly visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching ends (cont'd)	Secured with less than three tying, overlapping or backstitches when automatic stitching is performed			X
Component and assembly	Any component part omitted or not fabricated of applicable referenced material	X		
Finish of metal components	Not finished	X		
	Not adherent, e.g., blistered, peeled, or flaky		X	
	Coating not continuous or uniform, i.e., not coated or area of no film			X
	Scratch, dig, or abrasion exposing bare metal or primer			X
	Color not as specified		X	
Welding	Missing, incomplete, burnt through, cracked, porous, fractured, or otherwise not fused	X		
	Not type specified, not smooth, flux and scale not removed			X
Marking, labels	Omitted, incorrect, illegible, misplaced, or size characters not as specified			X
Cleanness	Grease or oil stains, thread ends not trimmed to 1/2 inch or less throughout			X

4.5.3.2 Dimensional examination of air lock assembly. The air lock body assemblies with doors shall be examined for defects in table II. The inspection level shall be S-3 and the AQL shall be 2.5 major and 40.0 total (major and minor combined) defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currentversion before use.

TABLE II. Air lock body assembly dimensional defects

Examine	Defect	Classification Major	Classification Minor
Overall dimensions (unless otherwise specified)	Smaller than specified dimensions less applicable minus tolerance indicated on drawings	X	
	Larger than specified dimensions and applicable plus tolerance indicated on drawings		X
Location dimensions (unless otherwise specified)	Not within specified tolerance		X

4.5.3.3 Visual examination of bow assemblies. The bow assemblies shall be examined for defects in table III. The inspection level shall be II and the AQL shall be 2.5 major and 10.0 total (major and minor combined) defects per hundred units.

TABLE III. Bow assembly visual defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not finished	X	
	Not adherent, e.g., blistered, peeled, or flaky		X
	Coating not continuous or uniform, i.e., not coated or area of no film		X
	Corroded area		X
	Scratch, dig, or abrasion exposing bare metal or primer		X
Construction and workmanship	Component missing	X	
	Any component not fabricated of applicable referenced material	X	
	Split, puncture, burr, rough or sharp edge, or deformed	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

TABLE III. Bow assembly visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Rivets and riveting	Rivet missing	X	
	Not specified type or size		X
	Rivet not peened, i.e., can be removed by hand	X	
Marking	Missing, incomplete, illegible, or incorrect		X

4.5.3.4 Dimensional examination of bow assemblies. The bow assemblies shall be examined for compliance with dimensions specified. Any dimension not within the specified drawing requirements shall be classified as a defect. The inspection level shall be S-3 and the AQL shall be 4.0 defects per hundred units.

4.5.3.5 Visual examination of light assemblies. The light assemblies shall be examined for defects in table IV. The inspection level shall be II and the AQL shall be 2.5 major and 10.0 total (major and minor combined) defects per hundred units.

TABLE IV. Light assembly visual defects

Examine	Defects	Classification Major	Minor
Finish	Not finished	X	
	Not adherent, e.g., blistered, peeled, or flaky		X
	Coating not continuous or uniform, i.e., not coated or area of no film		X
	Scratch, dig, or abrasion exposing bare metal or primer		X
Construction and workmanship	Component missing	X	
	Any component not fabricated of applicable referenced material	X	
	Burr, sharp edge, or deformed	X	
Marking	Missing, incomplete, illegible, or incorrect		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the current version before use.

4.5.3.6 Dimensional examination of light assemblies. The light assemblies shall be examined for compliance with dimensions specified. Any dimension not within the specified drawing requirements shall be classified as a defect. The inspection level shall be S-3 and the AQL shall be 4.0 defects per hundred units.

* 4.6 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with section 5 requirements. Defects shall be scored in accordance with table V. The sample unit shall be one shipping container fully packaged except that it need not be closed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE V. Packaging defects

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method application.
Materials	Any component missing; any component damaged.
Workmanship	Bow sections not secured; guy lines not individually coiled and secured against unwinding.

4.7 Methods of inspection.

* 4.7.1 Adhesive testing.

4.7.1.1 Adhesive dead load shear strength.

4.7.1.1.1 Preparation of sample lap seam. Two rectangular swatches of type I, class 1 MIL-C-43285 coated fabric shall be cut, each approximately 8 inches by 10 inches with warp threads running parallel to the 10 inch dimension. The swatches shall be cut from areas of the coated fabric that are free of waviness or distortion of the weave. A quantity of the adhesive base and the accelerator, sufficient to fabricate the test samples, shall be selected from the adhesive lot. The two swatches shall be joined with the adhesive to form a lap seam wherein the chlorosulphonated polyethylene side of one swatch is adhered to the cloroprene side of the other. The seam shall be made by overlapping the 8 inch ends for a distance of 2 inches, with care exercised that the warp directions of the two swatches are aligned. The surfaces to be bonded shall be cleaned, adhesive shall be applied, and the assembly shall be made in the same manner used in production (see 3.6.9). Allow the seam to cure at 70 to 75°F for 7 days prior to testing. Adhesives may be tested in less than 7 days curing, and if found to meet the requirements, will be acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

4.7.1.1.2 Specimens. One-inch wide strips shall be cut from the sample lap seam prepared as specified in 4.7.1.1.1, to provide 1-inch wide by 18-inch long specimens with warp threads running parallel to the 18-inch length.

4.7.1.1.3 Procedure. One end of each specimen shall be anchored in a suitable grip. A load of 40 pounds shall be fastened to the other end of the specimen. The anchoring grip and the load application grip shall be of a type which precludes failure of the specimen in or near the grips. The grips shall not be applied any closer than 2 inches to the lap seam and shall hold the specimen uniformly across the 1-inch dimension without twist. A suitable gage mark (e.g., ball point line) shall be made at the lap seam edge prior to loading to assist in determining the amount, if any, of relative seam slippage. The two specimens shall be tested for 4 hours at 200°F. After removal of load, a second gage mark shall be made at the lap seam edge. The amount of slippage shall be reported as the distance measured to the nearest 1/16 inch between center lines of the gage marks for compliance with 3.4.5.1. Slippage greater than 1/16 inch shall constitute a failure.

4.7.1.2 Adhesive dead load peel strength.

4.7.1.2.1 Preparation of sample laminate. A sample laminate shall be prepared in the same way as described in 4.7.1.1.1 except that (a) the two pieces of cloth shall have adhesive applied over most of the surfaces of both pieces except for approximately 2 inches at one end and (b) the two pieces shall be assembled in a full overlap in lieu of the 2 inch lap.

4.7.1.2.2 Specimens. One-inch wide strips shall be cut from the laminate. The uncemented end will provide tabs for conduct of the peel test. The tabs shall be further separated by hand for at least 1 inch prior to test.

4.7.1.2.3 Procedure. The specimen shall be subjected to a test load of 1 pound (including weight of grip) in dead load peel for 10 minutes at a temperature of 70 to 75°F. The anchoring grip and force application grip shall hold the tab ends uniformly across the 1 inch dimension and the force shall be applied uniformly without twist. Before application of the load, a suitable gage mark shall be made at the line of peel on one of the tabs. At the end of 10 minutes of test, the force shall be removed and a second gage mark made in the same way on the same tab. The distance between the marks shall be measured to the nearest 1/16 inch as the amount of peel for compliance with 3.5.5.2. Peel greater than 1/2 inch shall constitute a failure.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currentversion before use.

5.1.1.1 Disassembly. The light assembly shall be removed from the air lock. Each bow assembly shall be detached from the air lock body and disassembled into its two components. The fabric body shall be separated from the door assembly end panel.

* 5.1.1.2 Unit packing. The fabric body shall be neatly and compactly folded onto and within the rectangular area of the floor assembly. The six bow sections shall be neatly bunched and secured with flat strapping or tape. Guy lines shall be individually coiled and secured against unwinding. The light assembly shall be unit packed in a snug-fitting fiberboard box conforming to type CF (variety SW) or SF, class domestic, grade 175, style RSC of PPP-B-636.

* 5.1.2 Commercial. Complete airlocks shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Each air lock, preserved as specified in 5.1, shall be packed in a snug-fitting cleated plywood shipping container conforming to overseas type, type 2 load of PPP-B-601. Components shall be positioned with the door assembly at the bottom of the container. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

5.2.2 Level B packing. Each air lock, preserved as specified in 5.1, shall be packed in a snug-fitting, cleated plywood shipping container conforming to domestic type, style A or B of PPP-B-601. Components shall be positioned with the door assembly at the bottom of the container.

* 5.2.3 Commercial packing. Air locks, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

* 5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The air lock is intended to provide a protected entry to all major shelters (multi-purpose, expandables and inflatables) of the MUST system.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.2, 4.3 and 6.3).
(c) When an inspection comparison testing sample is required (see 3.4, 4.4 and 6.4).
(d) Whether the light assembly, conforming to Drawings 5-4-1605 or 5-4-1759, is required.
(e) When an erection kit is not required (see 1.1, 3.5.11 and 6.6).
(f) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required it shall be inspected and approved under appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample or an initial production sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Inspection comparison test. When a comparison test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the comparison test sample.

6.5 Cementing of coated cloth. The following system has been used in preparing seams where chlorosulphonated polyethylene coated surfaces of coated cloths are to be adhered to chloroprene coated surfaces:

a. Abrade, by hand, the chlorosulphonated polyethylene surface only to the point of dullness and uniform roughness. Norton Company's Lightning Metalite Cloth - Aluminum Oxide 80-J or 3-M Company's Three-M-ite-Elek-Tro-Cut Cloth J-wt Aluminum Oxide are satisfactory for use in abrading.

b. Wash the abraded chlorosulphonated polyethylene surface and the nonabraded chloroprene surface with clean cotton cloth swabs wet with toluene.

c. Allow each washed surface to dry at room temperature for 15-20 minutes.

d. Brush apply one coat of adhesive (see 3.4.5) to each washed surface.

e. Allow the adhesive to dry at room temperature for 15-20 minutes.

f. Brush apply a second coat of adhesive.

g. After 15-20 minutes drying, reactivate each adhesive with toluene.

h. Assemble immediately, smooth by hand, followed by the use of a steel roller.

i. Cure the cemented assembly a minimum of 24 hours before movement and a minimum of seven days before straining the cemented joint.

6.6 Air lock anchoring components are included in the Erection Kit for Shelter, Inflatable, with Air Lock and Connector, Corridor, Inflatable (MUST) and are not required when the Air Lock is supplied as a component of that shelter.

* 6.7 Light assembly, air lock. The light assembly, in accordance with Drawing 5-4-1605, is for use when the air lock is to be supplied with the Inflatable Shelter, and in accordance with Drawing 5-4-1759 for use when the air lock is to be supplied with the Expandable Shelter.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:27Z
Check the source to verify that this is the currentversion before use.

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.5).

* 6.9 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:


Army - MD
DCSC - CS

Preparing activity:

Army - GL


Project No. 5410-0302


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.

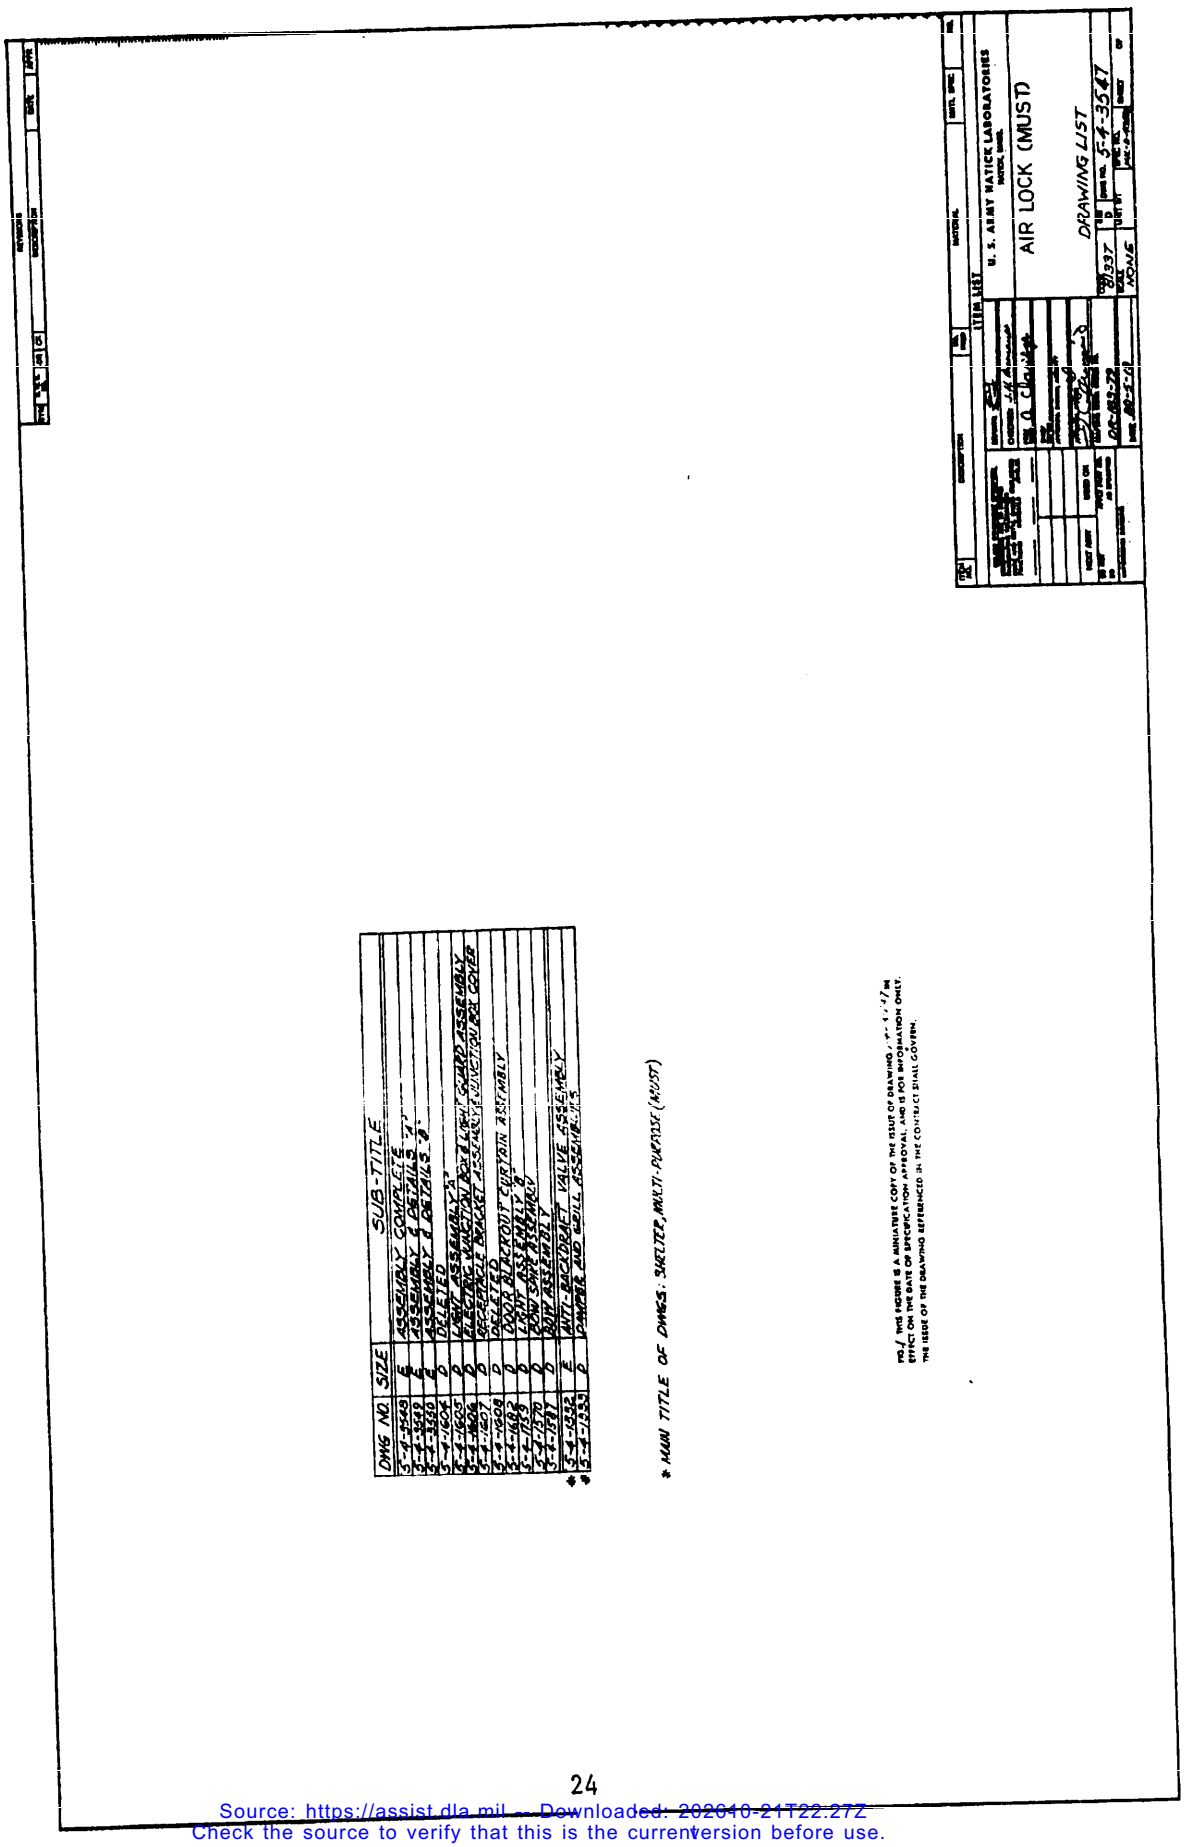



Source: https://assist.dla.mil -- Downloaded: 2026-01-21T22:27Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 20260-21T22:27Z
Check the source to verify that this is the current version before use.



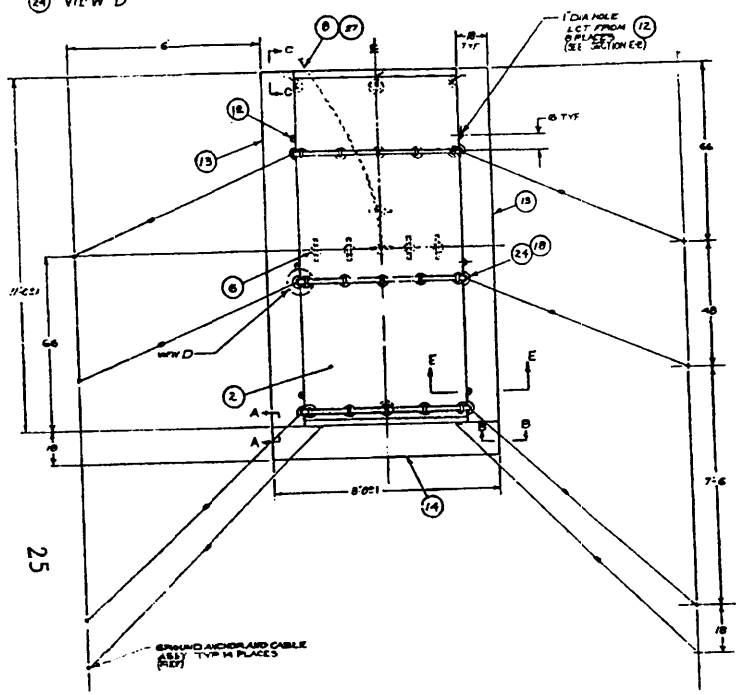

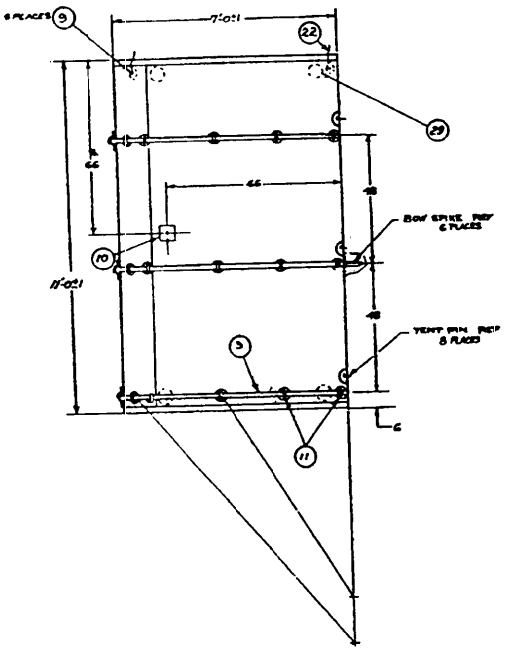



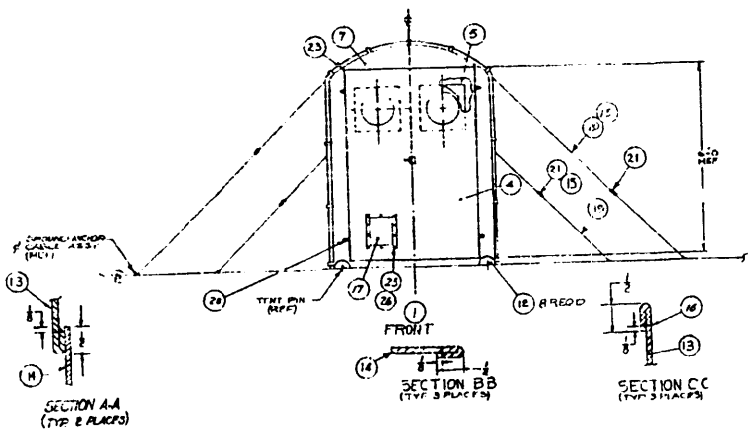

NOTES:
1. COATED CLOTH SHALL CONFORM TO TYPE I OF MIL-C-43427, EXCEPT THAT CLASS AND WEIGHT PER SQUARE YARD SHALL BE AS SPECIFIED IN THE SPECIFICATION.
2. ALL CUT ENDS OF WEBBING & CORDS SHALL BE HEAT FUSED.
3. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE SHALL BE AS FOLLOWS:
   LOCATING DIMENSIONS; LESS THAN 3" ± 1/8
   3" TO, BUT NOT INCLUDING 18" ± 1/4
   18" - " " 72" ± 1/2
   72" OR MORE ± 1"
   DETAIL ITEM DIMENSION; LESS THAN 3" ± 1/64
   3" TO, BUT NOT INCLUDING 18" ± 1/32
   18" - " " 36" ± 1/16
   36" OR MORE ± 1/8
4. ITEM 4 TO BE PLYCON INC P/N 10564 OR ARMTECH INC P/N 10564-1 OR EQUIV
5. THE ADHESIVE SYSTEM TO BLOCKED SHALL BE EITHER OF THE FOLLOWING
   a. USM CHEMICAL CO BOSTIK NO 1039, 1/6 VOLUMES
      USM CHEMICAL CO BOSCODUR NO 5, 1 VOLUME
      4 VOLUMES TOLUENE
   b. USM CHEMICAL CO BOSTIK NO 1095, 1/6 VOLUMES
      USM CHEMICAL CO BOSCODUR NO 9, 2 VOLUMES
      4 VOLUMES TOLUENE
6. ITEM 8 SHALL BE USED ON INFLATABLE SHELTER AND ITEM 27 SHALL BE USED ON FRAMEABLE SHELTER.
7. ELIMINATE (22) AND (28) WHEN PLYCON DOOR IS USED.


THIS FIGURE IS A MINIATURE COPY OF THE ISSUE OF DRAWING ... IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL, AND IS FOR INFORMATION ONLY. THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN.

ITEM	QTY	DESCRIPTION	MATERIAL	SPEC NO.	SEE NOTE
30		TIE PATCH ASSY			1-1-3045
29	2	CLIP AND BUCKLE "D" RING ASSY			1-1-4750
28	1	LIGHT ASSY "A"	SEE NOTE 6		1-1-3045
27	10	SCL, HEX, PHIL HD, 10-32 NF 2B X 0.88 L	SCL, HEXAGON-SAE SEE NOTE 21		1-1-3045
26	10	WASHER, LOCK, SPLIT, NO. 10	SCL, HEXAGON-SAE SEE NOTE 21		1-1-3045
25	6	PATCH	CLOTH, COATED, SEE NOTE 1		1-1-3045
24	1	EYE BOLT ASSY			1-1-3045
23	6	CORD, POLYESTER, 1/8 DIA X 16 L	CORD GLI 7	MIL-C-5040	1-1-3045
22	14	STRIP, TENT LINE	TYPE II	MIL-W-5625	1-1-3045
21	8	WEBB, POLYESTER, 2 INCH X 21'-11" L	CLASS GLI	MIL-W-5625	1-1-3045
20	6	WEBB, POLYESTER, 1 INCH X 8'-0" L	CLASS GLI	MIL-W-5625	1-1-3045
19	48	ADHESIVE	SEE NOTE 5		1-1-1150
18	1	ANTI-HERO SHAFT VALVE ASSY			1-1-3045
17	48	GROMMET, POLYESTER, NO. SIZE 17	TYPE I, CL.1, SIZ CL-0, GRADE 2A	7-1-286	1-1-3045
16	48	GLOVE	SEE CO SUBSCRIPTION LIST OF COMPLY		1-1-3045
15	1	DOOR CLOTH	CLOTH, COATED, SEE NOTE 1		1-1-3045
14	1	DOOR CLOTH	CLOTH, NYLON, SEE NOTE 1		1-1-3045
13	1	TENT PIN PATCH ASSY			1-1-3045
12	13	DOOR WELDING SHAFT ASSY			1-1-3045
11	1	ELECTRICAL PATCH ASSY			1-1-3045
10	1	TIE PATCH ASSY			1-1-3045
9	1	LIGHT ASSY "B"	SEE NOTE 6		1-1-3045
8	1	END PANEL ASSY			1-1-3045
7	1	LIGHT & FIXTURE PATCH ASSY			1-1-3045
6	1	BLACKOUT CURTAIN ASSY			1-1-3045
5	1	DOOR ASSY	SEE NOTE 4		1-1-3045
4	1	DOOR ASSY			1-1-3045
3	1	DOOR ASSY			1-1-3045
2	1	AIR LOCK, ASSY			1-1-3045
NO.		DESCRIPTION	MATERIAL	SPEC NO.	SEE NO.

ITEM LIST

DRAWN		U. S. ARMY NATICK LABORATORIES	
TRACED		NATICK, MASS.	
DESIGNED		AIR LOCK (MUST);	
STRESS ANALYSIS		ASSEMBLY COMPLETE	
APPROVED		SCALE 1/8	SIZE E
DATE		DATE 5-2-1968	

MIL-A-43820B(GL)

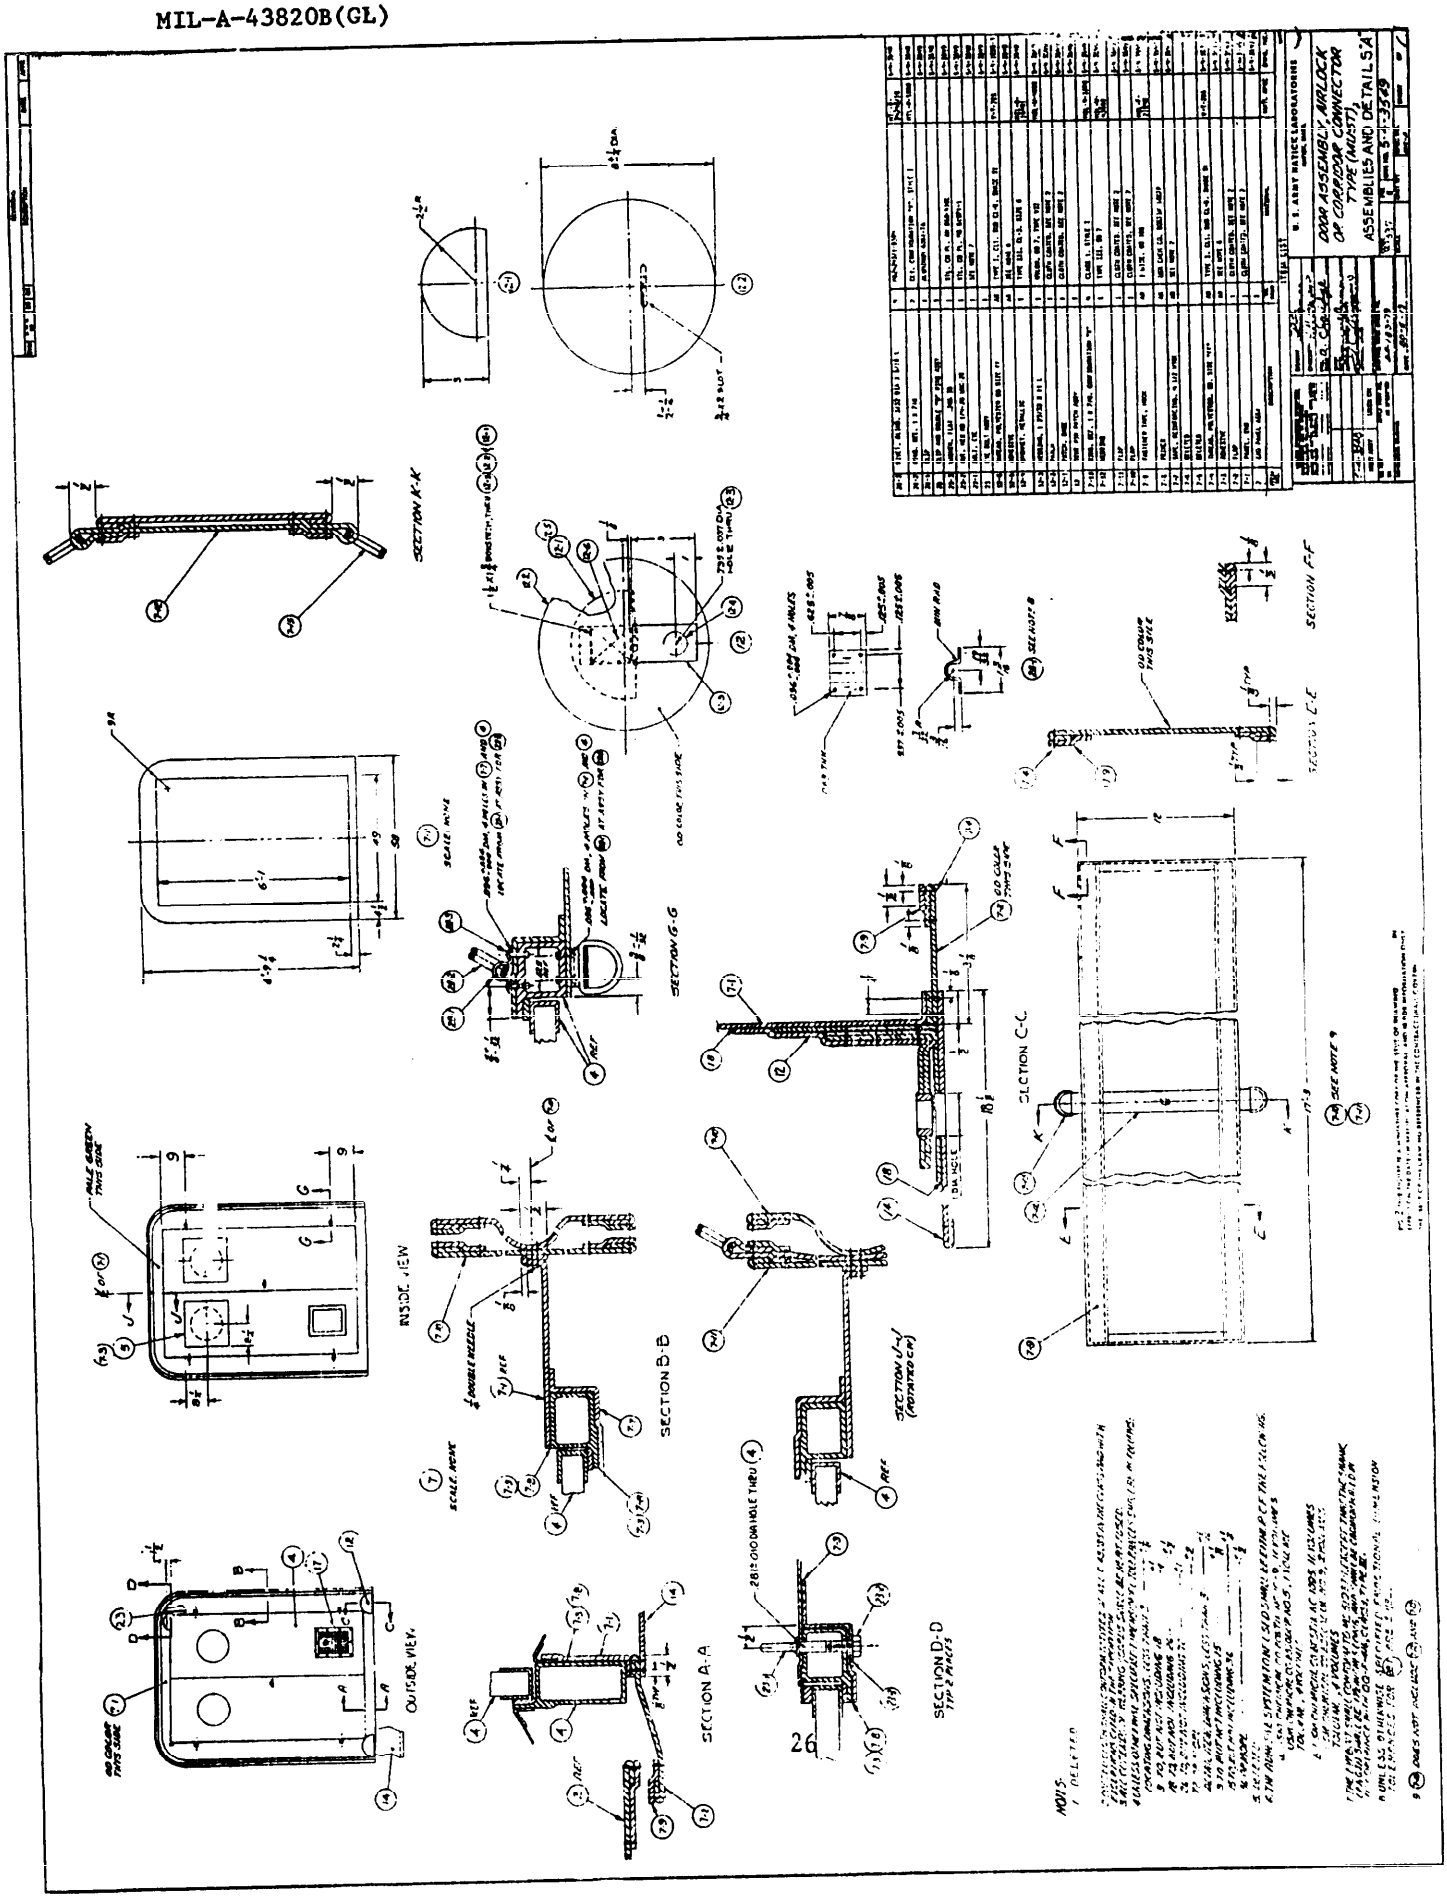

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:27Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-A-43820B(GL) Air Lock, (MUST)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Command
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:27Z
Check the source to verify that this is the current version before use.