INCH-POUND

MIL-D-43783F
27 January 1989
SUPERSEDING
MIL-D-43783E
18 September 1985

MILITARY SPECIFICATION

DRAWERS, MEN'S, BRIEF TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers men's brief type drawers.

1.2 Classification. The drawers shall be of the following classes and sizes as specified (see 6.2).

Class 1 - White, bleached
Class 2 - Brown 436

Schedule of sizes

28, 30, 32, 34, 36, 38, 40, 42, 44

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8420

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
V-T-276	-	Thread Cotton
JJ-W-155	-	Webbing, Textile, (Cotton, Elastic)
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification For
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-44193	-	Thread, Polyester, Textured

STANDARDS

FED-STD-191	-	Textile Test Methods
FED-STD-601	-	Rubber: Sampling and Testing
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 573 - Standard Test Method for Rubber
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC, 27709.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Standard sample. The finished drawers shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.1.3 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Material. It is encouraged that recyled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic cloth. The knitted cloth for the body of the drawers and leg binding shall be made of singles or 2-ply combed cotton yarn. The cloth shall be circular knit with a 1 x 1 ribbed knit and shall have a minimum of 25 wales and 29 courses per inch and a minimum bursting strength of 60 pounds when tested as specified in 4.4.1.1.

3.2.1.1 Cloth for fly binding and strip binding. The knitted cloth for the fly binding and strip binding shall be made from singles or 2-ply combed cotton yarn. The material shall be circular knitted with a jersey stitch and shall have a minimum of 29 wales and 35 courses when tested as specified in 4.4.1.1.

3.2.1.2 Preshrinkage (see 3.7.1). All knitted cloth shall be preshrunk by a mechanical shrinking process before being cut. The preshrinking process used shall not be identified by name or trademark on the drawers or package.

3.2.1.3 Nonfibrous materials content. The starch and protein content including chloroform-soluble material for all of the finished cloth shall not exceed 6.0 percent when tested as specified in 4.4.1.1.

3.2.1.4 Color. The color of the knitted cloth for the class 1 drawers shall be bleached white. The color of the knitted cloth for the class 2 drawers shall be Brown 436. The use of dyes and compounds containing elementary sulfur capable of oxidation to sufuric acid is prohibited. The dyestuff shall be chosen and applied so that the dyed and finished cloth shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.1. When a standard sample is not available, the dyed and finished cloth shall show no more than a slight trace of labile sulfur when tested as specified in 4.4.1.1.

3.2.1.5 Matching. The color of the dyed cloth shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and that have a correlated color temperature of 7500 $\pm$ 200 K, with illumination of 100 $\pm$ 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 $\pm$ 200 K.

3.2.1.6 Colorfastness. The finished dyed base cloth, and dyed webbing shall show colorfastness to laundering after 3 cycles and perspiration, either equal to or better than the standard sample (see 6.4); or at least equal to a rating of good. Fastness to crocking shall be either equal to or better than the standard sample; or shall have an AATCC Chromatic Transference Scale Rating not lower than 3.5. Fastness to light shall be either equal to or better than the standard sample; or shall show "fair" fastness to light after 20 hours of exposure. Testing shall be as specified in 4.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.2.1.7 Finish. Materials having a tendency to cause latent tendering or yellowing of the cloth shall not be used in any finishing operation. Resin finishes are prohibited. The finished cloth shall have a minimum pH of 5.0, and shall have a maximum pH of 8.5. Testing shall be as specified in 4.4.1.1.

3.2.2 Elastic webbing (woven polyester). The woven polyester webbing for the waistband shall conform to the requirements in table I. The elastic webbing for the waistband for class 1 drawers shall be white conforming to type I, class 9 of JJ-W-155 with the following exceptions:

a. The low temperature requirements shall not apply.

b. Only three sewing channels shall be woven and they shall be spaced closely to the bottom edge. The outside sewing section shall contain a minimum of six binder warp yarns each. The minimum total ground warp yarns shall be 36.

The elastic webbing for the waistband for class 2 drawers shall be Brown 436 conforming to type I, class 9 of JJ-W-155 with the following exceptions:

a. The low temperature requirements shall not apply.

b. Only three sewing channels shall be woven and they shall be spaced closely to the bottom edge. The outside sewing section shall contain a minimum of four binder warp yarns and the other two sewing sections shall contain a minimum of six binder warp yarns each. The minimum total ground warp yarns shall be 36.

c. The webbing shall meet the colorfastness requirements specified in 3.2.1.6.

TABLE I. Physical requirements for woven polyester waistband

Characteristics	Requirements
Color	Class 1 - White Class 2 - Brown 436
Width, inch	1-5/16 ± 1/16
Weight, oz/linear yard	0.62 (min)
Elastic ends	14 (min)
Elastic gage	36 (max. fineness)
Filling yarns per inch	60 (min)
Tension, lbs	
Initial	1.9 ± 0.3
After accelerated aging	1.6 ± 0.5
Yarn size	
Warp	20/2
Filling	1/300/60

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.2.3 Elastic webbing (knitted polyester). The knitted polyester webbing for the waistband shall conform to the requirements of table II with the following exceptions:

a. The low temperature requirements shall not apply.

b. The webbing shall be knit on a 14 gauge having a needle width of 20. Three mock sewing channels are to be formed at the bottom of the band by having the 2nd, 4th and 6th needles from the bottom edge to be free from any warp yarns or elastomers.

c. The webbing shall meet the colorfastness requirements specified in 3.2.1.6 and shall meet the infrared reflectance requirement specified in 3.2.1.8.

TABLE II. Physical requirements for knitted polyester waistband

Characteristics	Requirements
Color	Class 1 - White Class 2 - Brown 436
Width, inch	1-1/4 ± 1/16
Weight, oz/linear yard	0.55 (min.)
Elastic ends	17 (min.)
Elastic gage	36 (max. fineness or equivalent)
Picks per inch	40 (min.)
Warp ends	17 (min.)
Tension, lbs.:	
Initial	1.70 ± 0.25
After accelerated aging	80% of initial value (min.)
Yarn size:	
Warp	1 end 1/150/34 polyester
Filling	10 ends 1/150/34 polyester

3.2.4 Leg band elastic (see table IV, operation 5). The leg band elastic for the leg bottoms shall be of one piece, shall be cut, flat, heat resistant treated rubber which has been compounded of natural rubber, synthetic rubber or a mixture thereof, and shall conform to the physical requirements shown in table III when tested as specified in 4.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE III. Physical requirements of the leg band elastic

Characteristics	Requirements
Color	Class 1 - White Class 2 - Brown 436 1/
Thickness, inches (± .002)	0.012
Width, in. (± 1/32)	1/4
Yield, yds/lb. (± 15%)	238
Initial tension, lbs.	0.20 (min.) to 0.40 (max.)
Change in tension after accelerated aging (oven method) (%)	Not greater than 20.0

1/ White leg band elastic may be used as an alternate to Brown 436.

3.2.5 Woven or braided tape. When woven or braided tape is used for reinforcing the closing of the crotch, it shall be 3/16 inch in width when tested as specified in 4.4.1.1. The tape shall be bleached white for the class 1 drawers. The dyestuff shall be chosen and applied so that the dyed and finished tape shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.1. When a standard sample is not available, the dyed and finished tape shall show no more than a slight trace of labile sulfur when tested as specified in 4.4.1.1. The tape for the class 2 drawers shall be dyed Brown 436 and shall show colorfastness to laundering and crocking (after 3 cycles) equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed tape shall show good colorfastness to laundering and crocking (after 3 cycles).

3.2.6 Thread. The thread for seaming and stitching shall be cotton, ticket number 70, 2 or 3 ply, type IA2 and ticket number 30, 2 or 3 ply, type IC1 of V-T-276. As an alternate, cotton, rayon or staple polyester covered polyester thread conforming to ticket number 100, 2 or 3 ply of MIL-T-43548 or type I, class 1, 18 TEX or 24 TEX conforming to MIL-T-44193 may be substituted for the ticket numbers 70 and 30 cotton thread.

3.2.6.1 Color. The color of the thread for class 2 drawers shall be dyed shade Khaki P-1, CA 66019 and shall show colorfastness to laundering (after 3 cycles) equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed thread shall show good colorfastness to laundering (after 3 cycles).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.2.7 Sewing yarn. The looper cotton thread used with stitch type 606 shall be 28/1 yarn size, 21,000 minimum yards per pound and shall have a minimum breaking strength of 0.50 pounds when tested as specified in 4.4.1.1. The color of the yarn for class 1 shall be bleached white and for class 2 shall be Khaki P-1 CA 66019. The dyed yarn shall show no more than a trace of labile sulfur when tested as specified in 4.4.1.1, and shall show colorfastness to laundering (after 3 cycles) equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed yarn shall show good colorfastness to laundering (after 3 cycles).

3.3 Label. Each pair of drawers shall have a combination identification and size label conforming to type VI, class 4 of DDD-L-20. The label shall show fastness to laundering.

3.3.1 Label instruction. The instruction label for the drawers (class 2 only) shall conform to type VI class 3 instruction label and contain the following information.

INSTRUCTION LABEL

Launder using permanent press cycle or hand wash/warm water. Tumble dry using permanent press cycle or drip dry on a rust proof hanger Do not use chlorine bleach. Do not remove this label. Use of acne medicine containing benzoyl peroxide will cause discoloration.

3.4 Design. The design of the drawers shall be the brief type (sloped leg opening, see figure I) with elastic waistband and fly, and two leg pieces.

3.5 Figure. Figure I is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the specification shall govern.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitches, seams and stitching types, as specified in table IV, shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same part of the operation, any one of them may be used. Seams shall be sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there will be no excessively tight or loose stitching.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings produced with 301 stitch type, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.6.4 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

3.6.5 Bartacks. Bartacks shall measure 1/2 ± 1/8 inch long. Bartacks shall be free from thread breaks and loose stitching.

3.7 Manufacturing operations requirements. The drawers shall be made by and with the use of all operations shown in table IV. Unless otherwise specified in table IV, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, providing the thread is removed or does not show on the drawers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE IV.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting The drawers shall be cut in accordance with the manufacturer's patterns. All component parts shall be cut lengthwise in the direction of the wales, except for the leg binding.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Left and right fly binding. Bind right and left fly. The fly shall be fabricated with two plies of the basic cloth. The face of the fly binding shall be folded in 1/8 inch. The finished fly binding shall measure 1/2 ± 1/16 inch.	406	BSb-1	12-16	70-3	30-2	
4.	Join body and fly. The body of fly cloth shall be butted with a superimposed 3/8 ± 1/16 inch finished width strip binding. The strip binding cloth shall have both ends turned under and butted.	606 or 607 without cover thread in both cases	FSa-1 modified (see fig. I) FSa-1 modified (see fig. I)	12-16 12-16	70-3 70-3	28/1 30-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE IV (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Bind legs, insert flat elastic.						
	The bottom of the legs shall be bound with a 5/8 ± 1/16 inch finished binding (see 3.2.1.1). The top edge of the binding shall be turned under 1/4 inch and a flat elastic (see 3.2.5) shall be inserted inside the binding and seamed with a 3/16 to 1/4 inch gage stitch. The elastic shall not extend beyond edges of binding.	406 or	BSb-1 modified (see fig I)	12-16	70-3	30-2	
		407	BS-1 modified (see fig I)	12-16	70-3	30-2	
6.	Close crotch.						
	a. The bottom edge of the body cloth shall be joined at the crotch to the lower edge of the fly and leg binding with the row of stitching overlapping width of leg hem. A 3/16 inch woven or braided tape may be fed into the stitching.	606 or	FSa-1	12-16	70-3	28/1	30-2
		607	FSa-1	12-16	70-3	30-2	30-2
	or						
	The bottom edge of the body cloth shall be butted to the lower edges of the fly cloth forming the crotch with a 3/8 ± 1/16 inch finished width for the strip binding (see 3.2.1.1). The strip binding shall have both ends turned under and butted. The modified FSa-1 seam shall also join the leg bindings. The strip binding cloth shall be turned over the leg binding by 3/8 to 1/2 inch.	606 or	FSa-1 modified (see fig I)	12-16	70-3	28/1	
		607 without cover thread in both cases	FSa-1 modified (see fig I)	12-16	70-3	30-2	
	b. Secure ends of stitching with bartacks where the body and fly cloth form crotch at leg binding. The bartack shall be 1/2 ± 1/8 inch long.	Bartack		28 per bartack	70-3	70-3	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE IV (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Close crotch.						
	Zigzag tack with two close stitches at beginning and end.	304		12-16	70-3	70-3	
7.	Waistband.						
	a. Close elastic waistband. The ends of the waistband shall be joined at the center back of the body overlapping each end of the webbing 1/8 to 1/4 inch and securely stitched. The stitch chain shall be left 3/8 to 3/4 inch long and turned under and securely stitched by label stitching (see operation 6). The stitch gage shall be 3/16 to 1/4 inch.	304	LSa-1	28-32	30-2	30-2	
		or					
		605	LSa-1	12-16	70-3	30-2	30-2
		or					
		606	LSa-1	12-16	70-3	28/1	30-2
		or					
		607	LSa-1	12-16	70-3	30-2	30-2
	or						
	The ends of the waistband shall be butted with a 3/16 to 1/4 inch stitch gage. The stitch chain shall be left 3/8 to 3/4 inch long and turned under and securely stitched by label stitching (see operation 8).	304	FSa-1	28-32	30-2	30-2	
		or			or	or	
		605	LSa-1	12-16	70-3	30-2	30-2
		or					
		606	LSa-1	12-16	70-3	28/1	30-2
		or					
		607	Lsa-1	12-16	70-3	30-2	30-2
	b. Attach waistband elastic to waist. The one piece waistband (see 3.2.2) shall be attached to the top of the body of the drawers.	407 or	LSa-1	12-16	70-3	30-2	
		605	Lsa-1	12-16	70-3	30-2	30-2
	NOTE: When knitted waistband is used, join the ends of the knitted waistband with stitch type 605, 606, or 607.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE IV (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach label.						
	a. Attach combination identification and size label on the inside center of back elastic just below the top edge of the waistband of the drawers. The label shall be attached to the elastic webbing by securely stitching all four sides 1/16 to 1/8 inch from the edges of the label.	301	10-14	70-3	70-3		
	b. Attach instruction label to the left or right side of the identification and size label just below the top edge of the waistband of the drawers. The label shall be attached to the elastic webbing by securely stitching all four sides 1/16 to 1/8 inch from the edges of the label.	301	10-14	70-3	70-3.		
9.	Clean drawers.						
	a. Trim and remove raw edges and ends of thread of stitching inside and outside of drawers.						
	b. Remove all spots and stains.						
10.	Press drawers (optional).						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.7 Finished drawers sizes, measurements and weights. The finished drawers sizes, measurements and weights (see 4.4.4.2) shall conform to the requirements shown in table V. The letters corresponding to those in the table are shown in figure I. The drawers to be measured shall be laid out flat without tension on a smooth flat surface.

TABLE V. Finished drawers - sizes, measurements and weights (inches)

Size	1/2 waist (relaxed) A - B 1/	Leg opening (relaxed) C-D 2/	Trunk E-F 3/	Seat width H-I 4/	Front opening G-J 5/	Crotch width C-K 6/	Side length B-D 7/	Wgt per doz. (minimum) lbs	oz.
28	10-3/4	8	12-3/4	13	5	5	8	1	5
30	11-1/2	9	13-3/4	14	5	5	9	1	7
32	12	9	13-3/4	14	5	5	9	1	9
34	13	10	14/3/4	15-1/2	5-1/2	6	10	1	11
36	14	10	14-3/4	15-1/2	5-1/2	6	10	1	14
38	15	11	15-3/4	17	5-1/2	6	11	2	1
40	16	11	15-3/4	17	5-1/2	6	11	2	3
42	17	12	16-3/4	18-1/2	6	6	12	2	5
44	18	12	16-3/4	18-1/2	6	6	12	2	6
Tol:	± 3/4	-1/2, +1	± 1/2	± 1	± 1/2	-1/2, +1	± 1/2		

1/ 1/2 waist (relaxed). Measured from side to side along top edge of waist (A - B, figure I).

2/ Leg opening dimension. Superimpose the front edge of the leg opening located between letter C and D (see figure I) on the back edge of the leg opening located between those two letters. With the opening in this position measure the distance between C and D. Tension shall not be supplied to the opening before or during the measuring procedure.

3/ Trunk dimension. From bottom edge crease to top edge of front elastic (E - F, figure I).

4/ Seat width dimension. Width of drawers measured at widest point above and by leg binding excluding leg binding (H - I, figure I).

5/ Front opening dimension. Inside measurements from binding to binding (G - J, figure I).

6/ Crotch width dimension. Across bottom of crotch between outer edges (C - K, figure I).

7/ Side length dimension. Measured at outer edge of drawers flat on table (B - D, figure I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3.7.1 Shrinkage. The finished drawers shall not shrink nor elongate more than 12.0 percent in either measurement "E - F" or "H - I" (see figure I) when tested as specified in 4.4.4.1.

3.8 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required (see 3.1.3 and 6.2), it shall be examined for the defects specified in table V and VII.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material testing. In addition to any testing required by 4.4.1, testing shall be performed on components listed below for the characteristics noted. The methods of testing specified in FED-STD-191, wherever applicable and as listed below, shall be followed. All test reports shall contain the individual values used in expressing the final results. The component lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The basis for expressing component lot size and sample unit, and determining the sample size, shall be as follows:

Component or material	Lot size unit	Sample unit
Basic cloth	yard	1 yard
Fly and strip binding	yard	1 yard
Waistband elastic webbing cotton	yard	2 yards
Waistband elastic webbing polyester	yard	2 yards
Leg band elastic	yard	9 yards
Woven or braided tape	yard	1 yard
Sewing yarn	spool, cone, or tube	1 spool, cone, or tube

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

Lot size	Sample size (sample units)
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE VI. Component and material tests

Component or material	Characteristic	Requirement paragraph	Test method
Basic cloth	Ply, yarn	3.2.1	Visual
	Combed cotton	3.2.1	1/
	Type of knit	3.2.1	Visual
	Texture	3.2.1	5070
	Bursting strength (pounds)	3.2.1	5120
	Nonfibrous material	3.2.1.3	2611
	Presence of labile sulfur	3.2.1.4	2021
	Colorfastness:		
	Laundering	3.2.1.6	5610 2/ 3/
	Crocking	3.2.1.6	5651
	Perspiration	3.2.1.6	5680
	Light (after 20 standard fading hours)	3.2.1.6	5660
	Finish	3.2.1.7	1/
	pH of water extract	3.2.1.7	2811
Fly and strip binding	Yarn ply	3.2.1.1	Visual
	Combed cotton	3.2.1.1	1/
	Type of knit	3.2.1.1	Visual 4/
	Texture	3.2.1.1	5070
	Nonfibrous materials	3.2.1.3	2611 1/
	Finish	3.2.1.7	1/
	pH	3.2.1.7	2811
Woven or knitted elastic webbing	Colorfastness:		
	Laundering	3.2.1.6	5610 2/ 3/
	Crocking	3.2.1.6	5651
	Perspiration	3.2.1.6	5680
	Light (after 20 standard fading hours)	3.2.1.6	5660

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE VI. Component and material tests (cont'd)

Component or material	Characteristic	Requirement paragraph	Test method
Elastic webbing	Width	3.2.2, and 3.2.3	Visual
	Weight	3.2.2, and 3.2.3	5041
	Elastic ends	3.2.2, and 3.2.3	5050
	Elastic gage	3.2.2, and 3.2.3	5050
	Filling yarns/inch	3.2.2, and 3.2.3	5050
	Tension		
	Initial	3.2.2, and 3.2.3	4.5.1
	After aging	3.2.2, and 3.2.3	4.5.2
	Permanent set		
	Initial	3.2.2, and 3.2.3	4.5.3
	After aging	3.2.2, and 3.2.3	4.5.4
	Yarn size		
	Warp	3.2.2, and 3.2.3	1/
	Filling	3.2.2, and 3.2.3	1/
Leg band elastic	Color	3.2.4	Visual
	Thickness	3.2.4	5030 1/
	Width	3.2.4	Visual measurement
	Yield	3.2.4	1/ 5/
	Initial tension	3.2.4	1/
	Change in tension after accelerated aging	3.2.4	4.5.1 4.5.2
Woven or braided tape	Presence of labile sulfur	3.2.5	2021
	Width	3.2.5	Visual
	Colorfastness:		
	Laundering	3.2.5	5610 2/ 3/
	Crocking	3.2.5	5651
Sewing yarn	Material identification	3.2.7	1/
	Color	3.2.7	Visual
	Yarn size	3.2.7	4021 1/
	Yards per lb.	3.2.7	4010 1/
	Breaking strength	3.2.7	4100 1/
	Colorfastness to laundering	3.2.7	5610 1/ 2/
	Presence of labile sulfur	3.2.7	2021

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

1/ Unless otherwise specified, a certificate of compliance may be submitted and will be accepted for the stated requirement.

2/ Use three laundering cycles and dry after each cycle.

3/ Evaluation of the multifiber cloth for color transfer shall be made only on the cotton fiber float.

4/ One determination per sample unit and the results reported as pass or fall.

5/ A minimum of 1 yard of heat resistant treated rubber in relaxed state shall be weighed in grams and the yield shall be computed as follows:

$$\frac{\text{Weight X 36}}{\text{length of sample}} = \text{grams per yard}$$

$$\frac{454}{\text{grams per yard}} = \text{yards/pounds}$$

4.4.2 End item visual examination. The end item shall be examined for the defects listed in table VII. The lot size shall be expressed in units of drawers. The sample unit shall be one pair of drawers. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects and 4.0 for total (major and minor combined) defects.

TABLE VII. End item visual defects

Examine	Defect	Classification Major	Minor
Material defects	Any hole, cut, tear, drop stitch, thin area, or mend.	101	
	Any slub more than twice the thickness of normal yarn.		201
	Any accumulation of slubs, clearly visible 1/, causing nonuniform overall appearance.		202
	Loose knitting causing sleaziness		203
Color (class 2 only)	Appearance of shade bars, tiger stripes, or dye streaks.		204
	Color not comparable to standard sample.		205

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Cleanness	Spot or stain on outside: -more than 1/4 up to 1/2 inch inclusive.		206
	-more than 1/2 inch.	102	
	Spot or stain on inside more than 1/2 inch.		207
	Two or more untrimmed ends more than 1 inch in length inside or outside of drawers.		208
	Rancid or bad odor.	103	
Components	Any component missing or other than specified	104	
Construction	Any operation omitted or other than specified.	105	
Seams stitching	Needle chews.	106	
	Tight tension (stitches break when normal strain is applied to seam or stitching).	107	
	Loose tension resulting in a loosely secured seam (The strain shall be applied in the direction of the seam or stitching).		209
	Any part of drawers badly pleated, caught or twisted in any unrelated row of stitching.	108	
	Any untrimmed seam.		210
Seam type	Wrong seam type.	109	
Stitch type	Wrong stitch type.	110	
Stitches per inch	Number of stitches per inch exceeding minimum or maximum specified.		211
Open seam (any broken stitch, two or more continuous skipped or runoff stitches, or two or more threads of a stitch broken or skipped)	Up to 1/4 inch.		212
	More than 1/4 inch.	111	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

TABLE VII. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Bartacks	Bartack omitted (see operation 5b).	112	
Raw edges	Any raw edge or protruding raw edge on outside up to and including 1/2 inch		213
	Any raw edge or protruding raw edge on outside more than 1/2 inch	113	
Leg binding	Omitted.	114	
	Width of hem not uniform throughout.		214
	Width of hem less or more than specified.		215
	Flat elastic extends beyond edges(s) of binding.		216
Label	Omitted, incorrect, illegible, misplaced or not securely attached.		217

1/ At normal inspection distance (approximately 3 feet).

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table V. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of drawers. The sample unit shall be one pair of drawers. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 10.0.

4.4.4 End item testing.

4.4.4.1 Shrinkage testing. The end item shall be tested for shrinkage as specified in Method 7556 of FED-STD-191 except that after drying, the drawers shall be conditioned for 1 hour in a relaxed supported state before measuring. The drawers shall not be moistened or pressed before measuring, measurements shall be taken to the nearest 0.1 inch with the drawers laid flat as shown on figure I, and elongation shall be reported with a "-" sign. The lot shall be expressed in drawers. The sample unit shall be three drawers from each size in the lot. The sample size shall be as indicated in 4.4.1.1. The lot shall be rejected if any sample unit fails to meet the shrinkage requirements specified in 3.7.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

4.4.4.2 Weight testing. The end item shall be tested for conformance to the weight per dozen requirements in table V. The sample unit shall consist of twelve drawers of one size only. The sample shall consist of one sample unit from each size in the lot. The sample drawers shall be allowed to reach equilibrium under standard conditions as defined in FED-STD-191. Upon reaching equilibrium, each sample unit shall be weighed to the nearest 0.1 ounce under standard conditions. Failure of any sample unit to conform to the applicable weight per dozen requirement shall be cause for rejection of the lot.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of polyethylene bagged unit packs per shipping container is more or less than specified. Number of drawers per polyethylene bag is more or less than specified. 1/

1/ For this defect, four polyethylene bagged unit packs shall be examined from each shipping container in the sample.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

Examine	Defects
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Method of inspection.

4.5.1 Initial tension test. A constant rate-of-extension (see 6.5) type tensile testing machine with flat jaws shall be used to determine the initial tension. The test specimen shall be 14 inches in length and the full width of the heat resistant treated rubber tape shall be used. Bench marks 10 ± 0.01 inches apart shall be marked on the test specimen. The test specimen shall be placed between the jaws so that the bench marks coincide with the innermost extremities of the top and bottom jaws when in the closed position. The crosshead speed shall be set at 12 ± 0.05 inches per minute. The test specimen shall be loaded so that the autographic chart yields an elongation of 50 percent. The loading curve shall be recorded after the third cycle. The tension in pounds of five individual specimens shall be determined at the specified loading cycle and specified elongation. The results shall be averaged and reported to the nearest 0.01 pounds and recorded as "A".

4.5.2 Tension after aging test. The test specimen shall be prepared as specified in 4.5.1 and subjected to accelerated aging in conformance with Method 7221 of FED-STD-601, except that the oven temperature shall be 300°F and the time exposure shall be 2 hours. After aging, the specimens shall be relaxed under standard conditions until they reach equilibrium and then tested in accordance with 4.5.1 for tension. The tension results after accelerated aging shall be averaged and reported to the nearest 0.01 pounds and recorded as "B". The percentage change in tension after accelerated aging shall be as follows:

$$\frac{A - B}{A} \times 100 = \text{percent change in tension after accelerated aging}$$

A = Initial tension (pounds)
B = Tension after accelerated aging (pounds)

The percent change shall be calculated to the nearest 0.1 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

4.5.3 Initial permanent set test. Three test specimens each measuring 14 inches shall be cut and marked so that a distance of 10 inches (measurement A) is between the gauge marks. The specimens shall then be stretched 50 percent, held at that elongation for 24 hours under standard conditions, and then released and allowed to rest for 10 minutes. The distances between the gauge marks of the three specimens shall be remeasured, averaged, and recorded as measurement B. The percent permanent set shall be calculated as specified in 4.5.5.

4.5.4 Permanent set after aging test. Three test specimens each measuring 14 inches shall be cut and marked so that a distance of 10 inches (measurement A) is between the gauge marks. The specimens shall then be subjected to accelerated aging in conformance with ASTM D-573, except that the oven temperature shall be 300°F and the time of exposure shall be 2 hours. After aging, the specimens shall be relaxed under standard conditions until they reach equilibrium and then tested for permanent set in accordance with 4.5.3.

4.5.5 Calculation of elongation at -25°F. The percent elongation shall be calculated as follows:

$$\frac{B - A}{A} \times 100 = \text{percent temperature elongation.}$$

A = Initial measurement.
B = Measurement of elongation at low temperature.

The percentage shall be recorded to the nearest 0.1 percent.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Two pairs of folded drawers of one size only, shall be inserted into a snug-fitting clear polyethylene film bag conforming to A-A-50083.

5.1.2 Commercial. Drawers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Two hundred and four pairs of drawers of one size only, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in accordance with the appendix of PPP-B-636, except the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Two hundred and four pairs of drawers of one size only, preserved as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container assembled and closed conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Drawers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), drawers, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information together with the size legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The drawers are intended for use by male personnel.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Size and class required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
d. When a first article sample is required (see 3.1.3, 4.3 and 6.3).
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 Test apparatus. Apparatus defined in 4.5.1 may be procured from the following:

Instron Engineering Corporation
2500 Washington Street
Canton, MA

W.C. Dillon & Company, Inc.
14604 E. Kenswick Street
Van Nuys, CA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

Baldwin - Lima - Hamilton Corporation
Industrial Equipment Division
Philadelphia, PA

Tinius Olsen Testing Machines
Willow Grove, PA

6.6 Dyestuff combination. The following suggested, but not mandatory dyestuff combination can be used:

Combination 2

Reactive Yellow 84
Reactive Scarlet H-EA
Reactive Blue 160

6.7 Subject term (key word) listing.

Men's clothing
Underwear

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU

Review activities:


Army - MD
Navy - MC
DLA - CT

Preparing activity:

Army - GL

(Project 8420-0083)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

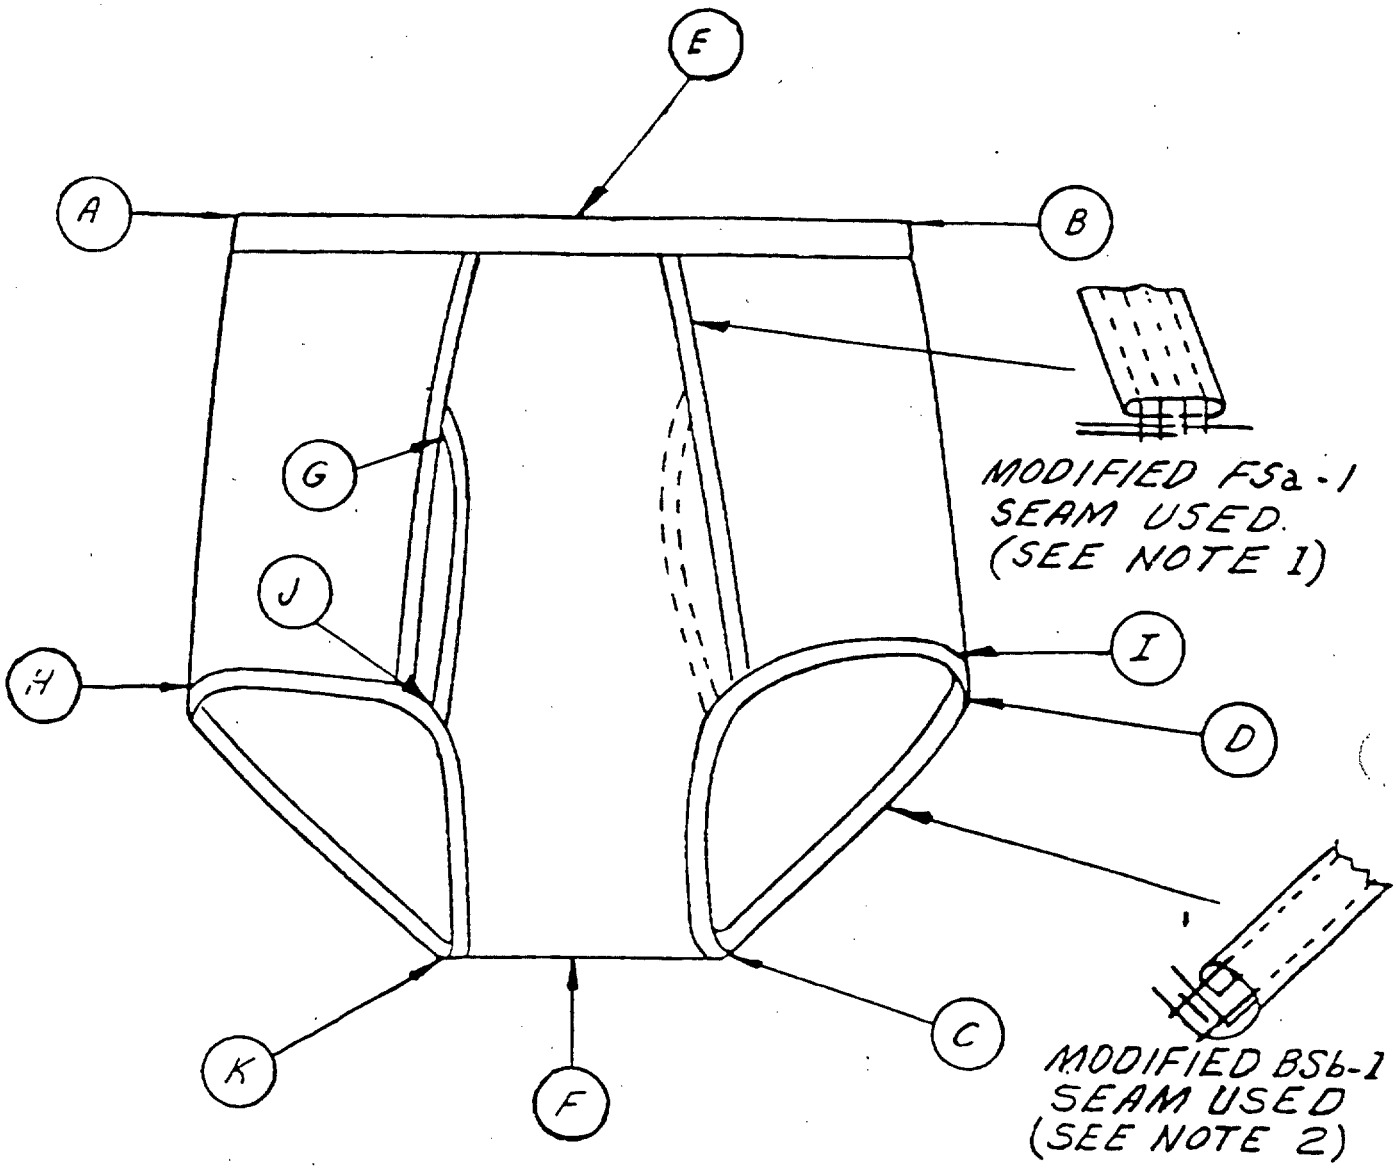

NOTE: 1. THE NUMBER OF LAYERS OF BODY FABRIC USED IN THE SEAM WILL VARY WITH THE LOCATIONS IN WHICH THIS SEAM IS USED.

2. ELASTIC MAYBE ON EITHER SIDE OF LEG MATERIAL.

FIGURE I DRAWERS, MEN'S (BRIEF TYPE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-43783F	Drawers, Men's, Brief Type

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK/OP-1 Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.