3 July 1972
(See 6.5)

MILITARY SPECIFICATION

FIBER ROPE ASSEMBLY, SINGLE LEG WITH TERMINAL ATTACHMENTS

1. SCOPE

1.1 Scope.- This specification covers requirements for various types of single leg fiber rope assemblies constructed with one plain end and one spliced end fitted around a circular thimble insert with anchor shackle and pin.

1.2 Classification.- The fiber rope assemblies shall be of the following types with one end having a spliced loop and the remaining end served.

Type I - 300 feet long.
Type II - 250 feet long.
Type III - 200 feet long.
Type IV - 500 feet long.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-R-605	-	Rope, Manila and Sisal.
T-T-616	-	Treatment, Mildew Resistant For Rope And Cord.
T-T-871	-	Twine, Cotton, Wrapping.
FF-T-276	-	Thimbles, Rope.
RR-C-271	-	Chains and Attachments, Welded, Weldless, And Roller Chain.
UU-T-81	-	Tags, Shipping and Stock.
CCC-C-429	-	Cloth, Osnaburg, Cotton.
CCC-C-467	-	Cloth, Burlap, Jute (Or Kenaf).

FSC 4020

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-1709 - Line, Tent.
MIL-T-40625 - Tubing, Bias Sewn (Burlap or Osnaburg) Cloth.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment And Storage.

(Copies of specifications, standards, publications, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.3) the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.4).

3.2 Materials.-

3.2.1 Rope.- The rope used in the fabrication of the assemblies shall be three strand manila, conforming to Type M, class 2 of T-R-605. The size of

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:22Z
Check the source to verify that this is the currentversion before use.

rope for type I assembly shall be 3-inch circumference, and the type II, III, and IV assemblies shall be 3-3/4-inch circumference. The rope shall be treated for mildew resistance in conformance with T-T-616.

3.2.2 Hardware.-

3.2.2.1 Circular thimble insert.- The circular thimble insert shall have a 1-1/4-inch inside diameter and conform to Type I of FF-T-276.

3.2.2.2 Anchor shackle and round pin.- The anchor shackle and round pin shall have a material size of 5/8-inch and conform to Type IV, class 4 of RR-C-271.

3.3 Design.- The fiber rope assembly shall consist of one continuous length of manila rope specified in 3.2.1 with one end served (see 3.4.2.1) and the opposite end eye spliced (see 3.4.2.2) with terminal attachments consisting of a circular thimble insert, anchor shackle and round pin specified in 3.2.2.1 and 3.2.2.2.

3.4 Construction.-

3.4.1 Length.- The finished assembly shall be of a continuous length with no knots, splices or otherwise joining of pieces to make the continuous length. The overall finished length shall be determined by measuring from the bearing surface of circular thimble insert in the eye splice to the served end after the fabricated assembly is extended to its fullest straight line natural length (see fig. 1). The length of the finished assembly shall be as specified in table I.

TABLE I

Type	Length	Tolerance
I	300 feet	± 3 inches
II	250 feet	± 3 inches
III	200 feet	± 3 inches
IV	500 feet	± 3 inches

3.4.2 End finish.-

3.4.2.1 Serving.- One end of the rope shall be served in conformance with Figure 1 with 5 ply cotton twine conforming to Type II, class 1 of T-T-871.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the currentversion before use.

3.4.2.2 Splicing.- The eye splice shall be formed by bending the end of the rope upon itself to form an eye and then spliced as follows to form a neat appearing eye splice. Unlay the rope a suitable distance and make an eye of required size; serve each strand and tuck the bottom strand under one strand against the lay, and tuck the middle strand under the next strand in the same manner. Turn the splice over and tuck the remaining strand as specified above. Tuck each strand a second time against the lay, over once and under once, and repeat until four full strand tucks are in the splice. Taper the ends of the strands to approximately one-half size and tuck each strand. Trim the ends of the strand ends to 1/2 inch and roll under foot, or tap with a hammer to insure a neat appearing close-fitting splice. Splices shall be formed without bulges, loose tucks or untrimmed strand ends.

3.5 Marking for identification.- Each fiber rope assembly shall have a tag attached for identification purposes. The ticket shall conform to the requirements for type B, class 1, size 4 or 5 of UU-T-81. The ticket shall be made of not less than 15-point paper stock and have a minimum tearing resistance of both directions (total) of 850 grams when tested as specified in UU-T-81. All ticket entries shall be legibly printed, stamped or typed with water insoluble ink. The ticket shall contain the following information:

Fiber Rope Assembly, Single Leg

Federal Stock Number

Type and Size

Date of Manufacture

U.S.A.

3.6 Workmanship.- The fiber rope assemblies shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required (see 6.3), the preproduction sample submitted in accordance with 3.1 shall be inspected for all the provisions of this specification applicable to end item inspection.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, inspection shall be performed for the requirements in table II and a supplier's certificate of compliance thereto shall be furnished and will be accepted for the requirement.

TABLE II.- Component test

Characteristic	Paragraph reference
Corrosion resistant tag	3.5
Corrosion resistant wire	3.5

4.3.2 Examination of the end item for visual defects.- The defects listed in table III shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition, in which case only the more serious defect shall be counted. The sample unit for this examination shall be one complete fabricated assembly. The lot size for this examination shall be expressed in units of assemblies each. The acceptable quality level shall be 2.5 major defects and 6.5 total defects (major and minor combined) per 100 units. The inspection level shall be level II.

TABLE III.- Visual examination defects

Examine	Defect	Classification Major	Minor
Finished item	Not as specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:22Z
Check the source to verify that this is the current version before use.

TABLE III.- Visual examination defects (cont'd)

Examine	Defect	Classification Major	Minor
Rope	Cut, any	X	
	Chafed or damaged	X	
	Kinks, broken or loose ends, bulged strands	X	
	Not of continuous length or contains knots, splices or otherwise secured to make a continuous length	X	
	Length less than length specified (including permitted tolerances)	X	
Cleanness	Spot, stain, clearly visible 1/		X
Hardware	Broken or malformed, failing to serve intended purpose; finish omitted; corroded areas, burrs, or sharp edges which may cause injury in handling	X	
	Not type or size specified	X	
Eye splice	Not accomplished as specified	X	
	Number of tucks less than specified	X	
	Tucks of splices not made against lay of the rope	X	
	End strands of splices not trimmed		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the current version before use.

TABLE III.- Visual examination defects (cont'd)

Examine	Defect	Classification Major	Minor
Eye splice (cont'd)	Not constructed firmly around thimble	X	
	Loose tucks, bulged splice or uneven splicing	X	
Served end	Not secured or not accomplished as specified		X
	Not served	X	
	Loose ends not tucked in lay of rope		X
Identification	Omitted, incorrect, illegible		X
	Insecurely attached		X
	Not as specified		X

1/ Clearly visible at normal inspection distance (approximately 3 feet).

4.3.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that the packaging, packing and marking complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one cloth covered bundle fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on cloth covered bundles fully prepared for delivery. The lot size shall be the number of cloth covered bundles in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
	Any component not as specified

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:22Z
Check the source to verify that this is the currentversion before use.

Material	Any component missing
	Any component damaged
Workmanship	Not tightly coiled
	Ties not approximately equidistant around the circumference of the coil
	Bias sewn tubing not as specified
	Ends of tubing not secured as specified
	Incorrect closure of cloth covered bundles
Packaging	Not as specified
Packing	Not as specified

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.3).

5.1.1 Level A.- Each fiber rope assembly shall be coiled and secured with twine conforming to type II, class 1 or 2, 36-ply of T-T-871. The twine ties shall be a minimum of four in number and be equidistant from each other, passing through the coil center to the outside and be knotted on the circumference of the coil.

5.1.2 Level C.- Each fiber rope assembly shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.3).

5.2.1 Level A.- One fiber rope assembly, packaged as specified in 5.1, shall be placed in bias sewn tubing or bag (presewn one end) made from cotton osnaburg cloth conforming to class 2 of CCC-C-429 or jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467. The bias sewn tubing shall conform to MIL-T-40625. The cloth covered bundles shall have the open ends closed with two double-looped wire ties. The wire ties shall be not less than 6 inches long, 0.072-inch diameter galvanized or black soft iron or steel wire

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:22Z
Check the source to verify that this is the current version before use.

with a 1/2-inch diameter formed eye at each end. The first wire tie shall be applied as close to the bundle as possible. The second wire tie shall be applied at a distance approximately 1 inch from the first wire tie. The twisted ends of the wire ties shall alternate and face in opposite directions. Alternatively, the fiber rope assembly shall be overwrapped and sewn in the specified cotton osnaburg cloth or jute (or kenaf) burlap cloth. The wrap shall be securely sewn with 16-ply cotton twine or 3-ply jute twine with approximately one stitch to the inch and every third stitch knotted.

5.2.2 Level B.- One fiber rope assembly, packaged as specified in 5.1, shall be packed as specified in 5.2.1.

5.2.3 Level C.- Fiber rope assemblies, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipments shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The fiber rope assembly is intended for hauling, towing and strapping operations.

6.2 Federal stock numbers.- The Federal stock numbers assigned to the types covered by this specification are as follows:

Type I - FSN 4020-171-4562

Type II - FSN 4020-171-4563

Type III - FSN 4020-171-4564

Type IV - FSN 4020-171-4565

6.3 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) First article. When first article is required (see 3.1, 4.2 and 6.4).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:22Z
Check the source to verify that this is the current version before use.

6.4 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one fiber rope assembly. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Supersession data.- This specification includes the requirements of Interim Purchase Description, IP/DES S-10-3 dated 24 January 1963.

Custodian:

Army - GL

Preparing activity:

Army - GL

Review activities:

Army - MD, ME, SM
DSA-IS

Project No. 4020-A005

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:22Z
Check the source to verify that this is the current version before use.

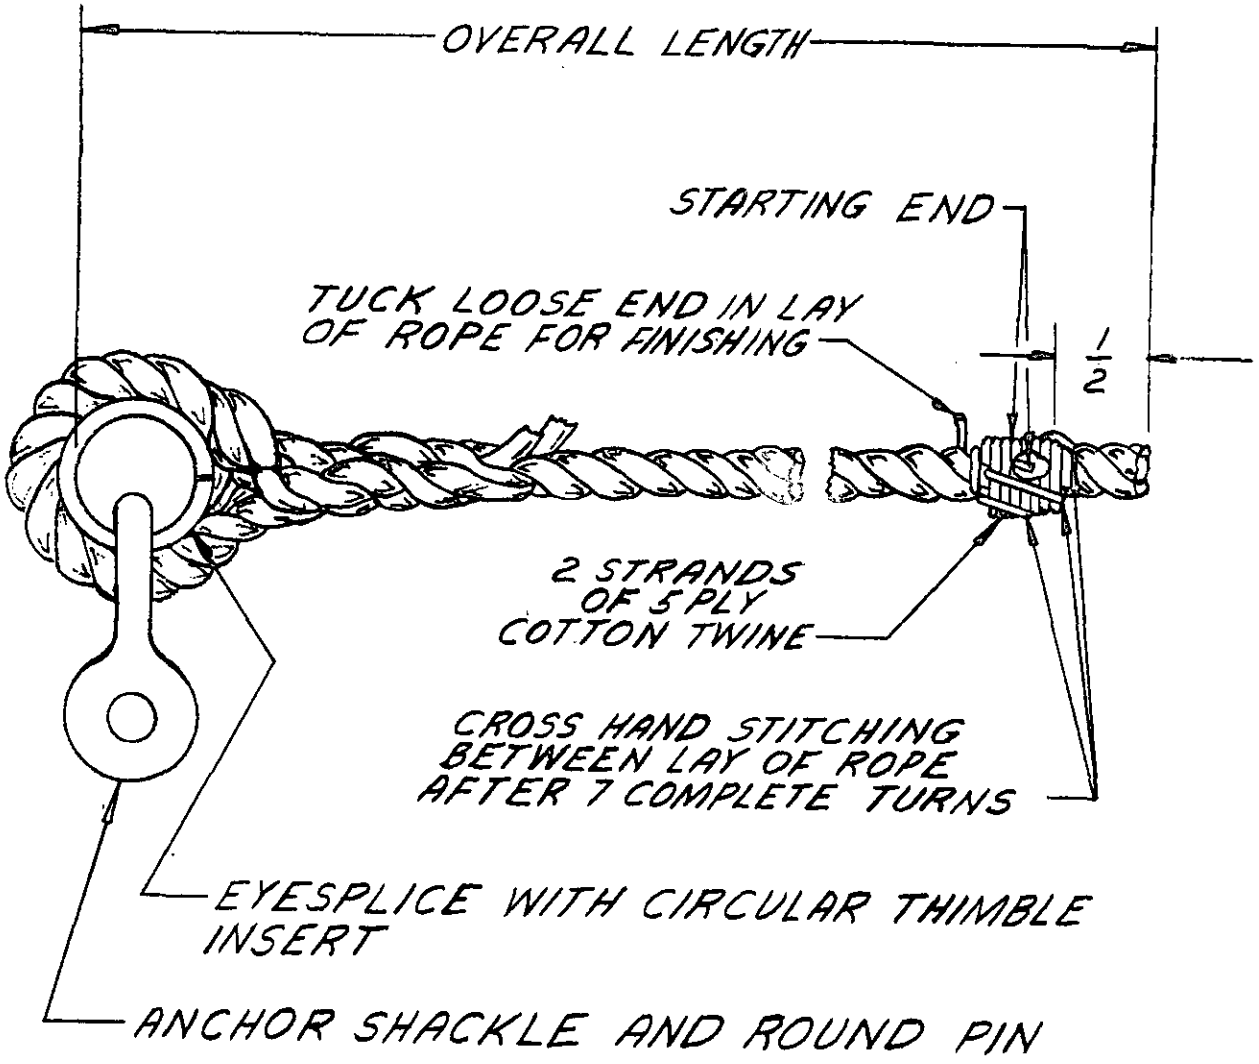


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Fiber Rope Assembly, Single Leg With Terminal Attachments; MIL-F-43799(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:22Z
Check the source to verify that this is the current version before use.