MIL-R-43804

28 August 1972

SUPERSEDING
(see 6.4)

MILITARY SPECIFICATION

RAILS, SIDE, PLATFORM: AIRDROP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers one type of side rail for use with panels in assembly of type II modular airdrop platforms.

2 APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

DRAWING

US ARMY NATICK LABORATORIES

11-1-321 - Platform, Air Delivery Modular, (Dual Rail System) Type II

(A miniature copy of NLABS Drawing 11-1-321, identified as figure 1, is attached for information only.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 First article.- When specified, the supplier shall furnish a sample for first article inspection and approval (see 4.3.1, 6.2 and 6.3).

3.2 Materials and construction.- The material, construction and supplementary processes involved in the fabrication of the side rail shall conform to the requirements specified herein and as specified on Drawing 11-1-321.

3.3 Workmanship.- The workmanship shall conform to the quality established by this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection.- Except as otherwise specified herein, sampling and associated procedures for formation of lots shall be in accordance with MIL-STD-105. Lots shall be expressed in units of side rails, of the same length, specified in the contract or purchase order. Sample units shall be as specified herein for the applicable inspection.

4.3 Inspections.-

4.3.1 First article inspection.- When required (see 6.2), examination of the first article shall be made of a completely fabricated end item for all provisions of this specification except examination of preparation for delivery.

4.3.2 Inspection of materials.- In accordance with 4.1 above, materials shall be inspected in accordance with all the requirements of referenced specifications and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.3 Visual examination.- The sample unit for this examination shall be one side rail. The classification of defects shall be as follows:

Examine	Defect	Classification Major	Minor
Finish, protective	Not finished as specified	X	
	Coating is blistered, peeling, flaking, or otherwise not adherent	X	
	Any breaks, scratches, tool marks through coating to metal		X
	Tacky, not dry to touch		X
	Not color specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Workmanship	Any operation omitted; cracked or bent	X	
	Any surface roughness beyond specified limit	X	
	Any burrs or sharp edges	X	
Marking	Missing, incomplete, not legible, or not as specified		X
	Not located as specified		X

4.3.4 Dimensional inspection.- Inspection shall be made to determine compliance with the dimensions and tolerances specified on the drawing. The sample unit shall be one side rail. Any deviation from the dimensions and tolerances shall constitute a defect.

4.3.5 Examination of preparation for delivery requirements.- An examination shall be made to determine that the packaging, packing, and marking complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defects
Marking	Omitted, incorrect, not legible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, defective, or not as specified.
Workmanship	Contents not snug-fit in container (loose); incomplete or improper closure of container; improper cushioning, blocking or bracing, tape banding or stapling; bulging or distortion of container.
Contents	Number per container not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

4.3.6 Inspection levels and acceptable quality levels (AQL).- Inspection levels and AQLs, expressed in defects per 100 units, shall be as follows:

	Inspection levels	AQL
For examination in 4.3.3	II	4.0 Major 10.0 Total
For examination in 4.3.4	II	1.0
For examination in 4.3.5	S-2	4.0

5. PREPARATION FOR DELIVERY

5.1 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.- Two side rails, of one length only, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, grade V2s of PPP-B-636. The size and weight limitations for the fiberboard box shall not apply. Each shipping container shall be provided with weather resistant grade fiberboard pads to prevent metal to metal contact between the rails and to immobilize the contents from movement while in transit. Each shipping container shall be closed by banding with pressure sensitive filament reinforced tape in accordance with the appendix of the container specification. The reinforcing bands shall be applied girthwise only. A band shall be located approximately 1 inch from each end of the shipping container. The distance between the end bands shall be equally divided by bands spaced not greater than 18 inches apart.

5.1.2 Level B.- Two side rails of one length only shall be packed as specified in 5.1.1, except the fiberboard for the fabrication of the shipping container shall conform to grade V3c, V3s, or V4s of PPP-B-636.

5.1.3 Level C.- Side rails shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The side rails covered by this specification are used in conjunction with panels procured under MIL-P-43772 in preparation of type II modular platforms. The platforms are used for cargo airdrop from C-130, C-141, and C-5A aircraft equipped with platform restraint rail systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Part number of item required.
(c) When a first article is required (see 3.1, 4.3.1 and 6.3).
(d) Selection of the applicable level of packing (see 5.1).

6.3 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement Regulation 7-104.55. The first article should be a preproduction sample and consist of one side rail. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Supersession data.- This specification supersedes Interim Purchase Description S-1-1, dated 15 March 1971.

Custodians:

Army - GL
Navy - AS
Air Force - 82

Preparing activity:

Army - GL

Project No. 1670-0476


Review activities:

Army - AV
Air Force - 11

User activity:

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

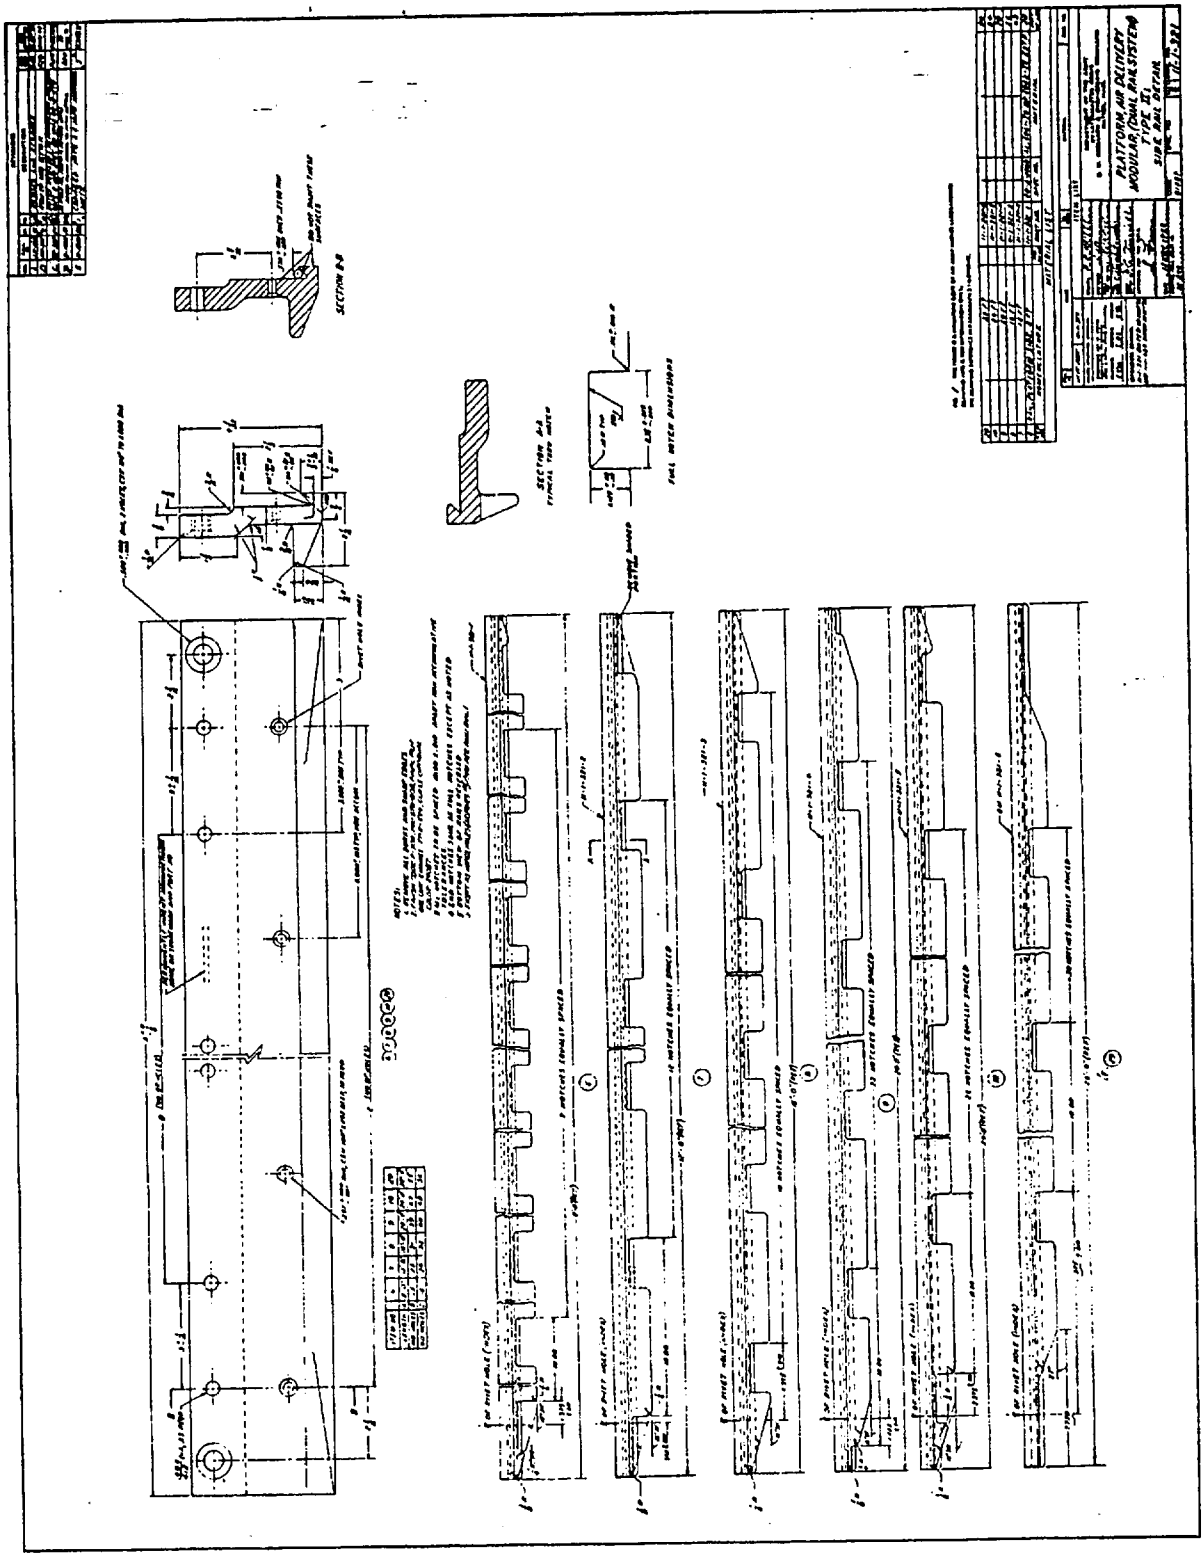

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Rails, Side, Platform: Airdrop MIL-R-43804

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:23Z
Check the source to verify that this is the current version before use.