MIL-S-43823A
16 August 1977
SUPERSEDING
MIL-S-43823
13 November 1972

MILITARY SPECIFICATION

SOCKS, MEN'S, NYLON, CUSHION SOLE, STRETCH TYPE, OG 106

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a nylon, stretch type, cushion sole sock.

1.2 Classificaton. The socks shall be of one type in the following sizes as specified (see 6.1):

Schedule of sizes

Small	(7 - 7-1/2 - 8 - 8-1/2)
Medium	(9 - 9-1/2 - 10 - 10-1/2)
Large	(11 - 11-1/2 - 12 - 13)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8440

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1491	-	Glossary of Knitted Imperfections

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.2). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 Standard sample. The socks shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.2).

3.1.3 First article. When specified (see 6.1) the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

3.2 Material.

3.2.1 Stretch-type knitting yarn. The yarn for knitting the elastic cuff, the leg portion of the sock down to the heel, the leg portion adjacent to the high heel, the top of the foot, and for plating the high heel, heel, sole, toe, and ring toe shall consist of a single end of a 70 denier (7.8 tex), 3 ply stretch nylon yarn. The yarn for the terry stitch on the inside of the high heel, heel, sole, toe and ring toe shall consist of a single end of a 70 denier (7.8 tex), 3 ply stretch nylon yarn. Testing shall be as specified in 4.4.1.

3.2.2 Elastic yarn. The elastic yarn for the cuff shall be a nominal 420 or 466 denier (47 or 52 tex) Spandex core having a 30 denier (3.3 tex) stretch type nylon inner and outer cover. Testing shall be as specified in 4.4.1.

3.2.3 Seaming thread. The thread for seaming the toes of the socks shall be nylon, natural white, commercial size 4, 1 or 2 ply. The thread shall have a length of 96,000 yards per pound (194,000 m/kg) $\pm$ 5 percent, a minimum breaking strength of 0.35 pounds (1.5 N) and a minimum elongation of 35 percent. Testing shall be as specified in 4.4.1.

3.3 Color. The color of the finished socks shall be OG 106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

3.3.1 Matching. The color of the finished socks shall match the standard sample under artificial daylight having a color temperature of 7500 K and shall be a good approximation to the standard sample under incandescent lamplight at 2800 K.

3.3.2 Colorfastness. The dyed socks shall show fastness to laundering, perspiration and crocking equal to or better than the standard sample. When no standard sample is available, the dyed socks shall show "good" fastness to laundering, perspiration and crocking when tested as specified in 4.4.3.

3.4 Label. Each sock shall have a size marking applied just below the instep and centered between the ankle and toe. The marking shall conform to type III, class 9 of DDD-L-20. The color of the marking medium shall be white. The marking shall be clearly legible and show fastness to laundering transference (wool method). The size legend shall be printed with characters a minimum 5/16 inch (8 mm) in height and shall contain the following information as indicated for each size:

Sock size	Legend
Small	SMALL 7 - 7-1/2 - 8 - 8-1/2
Medium	MEDIUM 9 - 9-1/2 - 10 - 10-1/2
Large	LARGE 11 - 11-1/2 - 12 - 13

3.5 Design. The socks shall be seamless, stretch type, with a true or mock rib knit, elastic top, and a plain knit leg and foot with a terry or tuft stitch on the inside of the high heel, heel, sole, toe and ring toe.

3.6 Construction.

3.6.1 Knitting. The socks shall be knit seamless on a circular machine of 156 to 176 needles and with a cylinder diameter of 3-3/4 or 4 inches (95 or 102 mm). The socks shall be knit so that they will finish to the proper size and length, without undue stretching during boarding. Testing shall be as specified in 4.4.3.

3.6.1.1 Leg. The leg of the sock, down as far as the start of the high heel, shall be plain knit using one end of the yarn specified in 3.2.1.

3.6.1.2 High heel, remaining portion of leg and foot. The high heel, the remaining portion of the leg adjacent to the high heel, and the foot, shall be plain knit using one end of the knitting yarn specified in 3.2.1. The high heel, heel, sole, toe and ring toe shall be reinforced with a terry stitch thrown to the inside, made with one end of the terry yarn specified in 3.2.1, in every knitting

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

course of these areas. The terry yarn for the high heel and sole shall be laid in at a point not less than 1 needle before the first short butt needle and taken out at a point not less than 1 needle after the last short butt needle in the heel gore. The knitting on all these needles shall be terried. The terry stitch may be omitted from not more than two courses before the looping course, provided the terry yarn is knit with the 70 denier (7.8 tex), 3 ply stretch nylon yarn into the knitting of the looper rounds. The two yarns shall be knit together for at least two courses beyond the looping or loose course.

3.6.1.3 Elastic top. The elastic top shall be a true 1 by 1 ribbed knit using one end of the knitting yarn specified in 3.2.1 and with one end of the elastic yarn specified in 3.2.2 laid in every other course. A mock rib knit elastic top using the identical yarns as shown for the true rib knit cuff will be acceptable. The top edge shall be finished with a well defined, non-ravelling welt free from loose ends.

3.6.2 Closing the toes. The toes shall be closed by seaming using the nylon thread specified in 3.2.3. The seam shall be as elastic as the knit fabric and shall be pulled flat to lie smooth and shall be free from lumps, laps, cuts, and bruises. A thread chain of 1/4 to 1 inch (6 to 25 mm) shall be left at the ends of the stitching to prevent raveling.

3.6.2.1 Stitch and seam types. The stitch and seam types used shall conform to FED-STD-751. The stitch type shall be type 521. The toes shall be seamed inside out with the two edges of the opening superimposed in seam type SSa-1. The sock shall be turned right side out and the seam pulled flat and the edges of the toe opening shall abut as in seam type FSa-1.

3.6.2.2 Stitches per inch (/cm). The seams shall be made with 50 to 56 stitches per inch (20 to 22 stitches/cm) when tested as specified in 4.4.3, using the nylon thread specified in 3.2.3 in both needles and the looper. The stitches per inch (/cm) requirement is based on the socks being in a relaxed state and shall be counted along the left hand row of needle penetrations, that is, the row toward the foot of the sock or away from the edge of the openings as the sock comes off the sewing machine. The socks may be marked off in the relaxed state and the toe stretched to facilitate easier counting.

3.6.3 Length of loose ends. All ends of yarn on the inside of the finished sock shall be trimmed to not less than 1/4 inch (6 mm) nor more than 1 inch (25 mm).

3.6.4 Finishing. The socks shall be scoured and boarded on drying forms to their proper shape and size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

3.6.5 Pairing. The socks shall be matched and paired so that there will be no greater difference in foot length than 1/4 inch (6 mm) and in leg length 1/2 inch (13 mm). Unless otherwise specified, the use of thread, twine or staples to secure the pair of socks will not be permitted.

3.7 Physical requirement.

3.7.1 Measurements and weights. The measurements and weights of the finished socks shall conform to table I. All measurements in table I shall be made with the sock laid out flat under no tension.

TABLE I. Measurements and weights

	See figure 1	Small	Medium	Large	Tolerance
Leg length, inches	A	14	15	16	Minimum
Leg length (mm)		(356)	(381)	(406)	Minimum
Foot length, inches	B	6-1/2	8-1/2	10-1/2	± 1/2
Foot length (mm)		(165)	(216)	(267)	(± 13)
Top length, inches	C	3	3	3	± 1/4
Top length (mm)		(76)	(76)	(76)	(± 6)
Top width, inches	D	3	3	3	± 1/2
Top width (mm)		(76)	(76)	(76)	(± 13)
High heel, inches	E	1-1/4	1-1/4	1-1/4	Minimum
High heel (mm)		(32)	(32)	(32)	Minimum
Ring toe, inches	F	1/2	1/2	1/2	Minimum
Ring toe (mm)		(13)	(13)	(13)	Minimum
Conditioned weight per dozen pairs, ounces		15	17	19	Minimum
(g)		(425)	(482)	(539)	Minimum

3.7.2 Stretch. The finished socks shall conform to the stretch requirements listed in table II when tested as specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

TABLE II. Stretch requirements, minimum

	Small		Medium		Large	
	Inches	(mm)	Inches	(mm)	Inches	(mm)
Crosswise stretch						
Leg 1/	8.5	(216)	9.0	(229)	9.0	(229)
Foot 2/	8.5	(216)	9.0	(229)	9.0	(229)
Elastic top 3/	8.5	(216)	8.5	(216)	8.5	(216)
Lengthwise stretch						
Foot	10.0	(254)	11.5	(292)	13.0	(330)

1/ Measure across a point midway between the bottom heel and bottom of rib top.

2/ Measure across a point midway between heel and toe.

3/ Measure across a point midway between top and bottom of elastic top.

3.7.3 Thickness. A double thickness of the terry portion (terry to terry) of the finished socks shall have a minimum thickness of 0.070 inch (1.8 mm) when tested as specified in 4.4.3.

3.8 Workmanship. The finished socks shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When required (see 6.2), the first article sample submitted in accordance with 3.1.3 shall be visually inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, construction, workmanship and dimensional requirements. The sample shall be tested for physical and chemical characteristics in accordance with 4.4.3.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition to the quality assurance provisions of the referenced specifications, testing shall be performed on the components listed in table IV. The methods of testing specified in FED-STD-191, wherever applicable, and as specified herein shall be followed. The lot size shall be expressed in units of one spool, cone or tube and the sample unit shall be one spool, cone or tube. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

TABLE III. Sampling for testing

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE IV. Component tests

Component	Characteristic	Requirement paragraph	Test method
Stretch-type knitting yarn	Material identification	3.2.1	1/
	Denier	3.2.1	1/
	Ply	3.2.1	Visual 2/
Elastic yarn: Core	Material identification	3.2.2	1/
	Denier	3.2.2	1/
Cover	Material identification	3.2.2	1/
	Denier	3.2.2	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method
Nylon seaming thread	Material identification	3.2.3	1/
	Ply	3.2.3	Visual 2/
	Yards per pound	3.2.3	4010
	Breaking strength	3.2.3	4100
	Elongation	3.2.3	4100

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ One determination per sample unit and the results reported as "pass" or "fail".

4.4.2 Examination of the end item. Defects found during this examination shall be classified in accordance with the lists shown in 4.4.2.1 and 4.4.2.2. The lot size shall be expressed in units of one sock. The inspection levels and acceptable quality levels for these examinations shall be in accordance with 4.4.2.3.

4.4.2.1 Visual examination. The finished socks shall be visually examined for defects as defined in MIL-STD-1491 and listed in table V. The sample unit shall be one sock.

TABLE V. Classification of defects

Defects	Classification Major	Minor
Any hole, run or dropped stitch including hole in looping	X	
Thin area, mend, or split stitch	X	
Welt omitted, cut, frayed or ravelled	X	
Welt uneven or not clearly defined		X
Loose end:		
Trimmed less than 1/4 inch (6 mm)	X	
Trimmed longer than 1 inch (25 mm)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects (cont'd)

Defects	Classification Major	Minor
Ends floating more than 1 inch (25 mm) on inside of sock		X
Any floated end on outside of sock	X	
NOTE: Floated ends which at one point are firmly attached as a part of the knitted fabric, with the other end loosely caught in the stitch shall be regarded as loose ends.		
Pattern of knit not as specified throughout entire sock	X	
Terry stitching omitted:		
For three or more complete courses	X	
For an area exceeding 2 inches (51 mm) in combined length and width	X	
Non-uniform in overall appearance, not well shaped		X
Slubby yarn more than three times normal diameter		X
Streak, stain, shade bar, or spot clearly visible 1/		X
Rancid or bad color		X
Off-shade		X
Mismatched for shade		X
Vegetable matter clearly noticeable		X
Any burn or scorch in fabric	X	
Marking missing, incorrect, incomplete, illegible or numerals less than 5/16 inch (8 mm)		X
Applicable to seamed toes:		
Wrong seam or stitch type	X	
Thread chain less than 1/4 inch (6 mm) but more than 1/8 inch (3 mm) or more than 1 inch (25 mm) but less than 1-1/2 inch (38 mm)		X
Thread chain less than 1/8 inch (3 mm) or more than 1-1/2 inch (38 mm)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects (cont'd)

Defects	Classification Major	Minor
Ends of stitching more than 1 inch (25 mm), but not more than 1-1/2 inch (38 mm), not chained off		X
Ends of stitching more than 1-1/2 inch (38 mm), not chained off	X	
Ends of stitching less than 1/2 inch (13 mm) but not less than 1/4 inch (6 mm), not chained off		X
Ends of stitching less than 1/4 inch (6 mm), not chained off	X	
Skipped stitches, run offs, broken thread resulting in an open seam	X	
Edges of toe opening do not abut		X
Seam not flat or smooth (i.e. lumps or laps, tightness or waviness)		X
Tuck stitches on outside of sock in terried area:		
Two or more floating over more than 2 courses		X
Any clearly visible accumulation of tuck stitches covering an area of more than 2 inches (51 mm) in its longest dimension		X

1/ At normal inspection distance, approximately 3 feet (1 m).

4.4.2.2 Dimensional examination. The socks shall be examined for measurement and pairing defects as specified in 4.4.2.2.1 and 4.4.2.2.2. The sample size shall be drawn in pairs.

4.4.2.2.1 Measurement examination. A defect shall be considered to exist if any measurement of an individual sock exceeds the tolerance specified in table I. The sample unit for this examination shall be one individual sock.

4.4.2.2.2 Pairing examination. Each sock examined for measurement defects as specified in 4.4.2.2.1 shall be examined for pairing defects. A defect shall be considered to exist if a pair of socks is mismated for foot length by more than 1/4 inch (6 mm) or leg length by more than 1/2 inch (13 mm).

4.4.2.3 Inspection levels and acceptable quality levels (AQLs). The inspection levels and AQLs expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

Examination	AQL	Inspection level
For 4.3.2.1		II
Major	1.5	
Major and Minor (combined)	4.0	
For 4.3.2.2		S-3
One class	4.0	

4.4.3 Testing of the end item. The test methods listed in table VI shall be in accordance with FED-STD-191, except as otherwise noted, and as described herein. The physical and chemical values specified in section 3 apply to the average of the number of test specimens selected for a sample unit for test purposes as specified in the applicable test methods. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in table VI, they shall be as required by the referenced test method. The lot size shall be expressed in units of one sock each. Except for weight and stretch determinations, the sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified. For weight and stretch determinations, the sample size shall be one sample unit and the lot shall be unacceptable if the sample unit for any size fails to meet any requirement specified. All test reports shall contain the individual values utilized in expressing the final result. The sample unit shall be as follows:

Weight determination - One dozen pair of socks from each size represented in the lot.
Stretch determination - Eight individual socks from each size represented in the lot.
All other tests - Twelve individual socks representing each size in the lot proportionately.

TABLE VI. End item tests

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as
Colorfastness to:				
Laundering	3.3.2	5610	-	-
Perspiration	3.3.2	5680	-	-
Crocking	3.3.2	5651	-	-
Type of knit	3.6.1.1	1/	-	-
	3.6.1.2	1/	-	-
	3.6.1.3	1/	-	-
Seamed toes:				
Stitches per inch (/cm)	3.6.2.2	Count	1	Actual count

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

TABLE VI. End item tests (cont'd)

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as
Weight per dozen pairs (conditioned)	3.7.1	Scale	1	To nearest 0.1 oz. (1 g).
Stretch (crosswise):				
Leg	3.7.2	2/	8	Average of 8 determinations to nearest 0.1 inch (1 mm).
Foot	3.7.2	2/	8	Average of 8 determinations to nearest 0.1 inch (1 mm).
Elastic top	3.7.2	2/	8	Average of 8 determinations to nearest 0.1 inch (1 mm).
Stretch (lengthwise):				
Foot	3.7.2	3/	8	Average of 8 determinations to nearest 0.1 inch (1 mm).
Thickness	3.7.3	5030 4/	10	Average of 10 determinations to nearest 0.001 inch (0.01 mm).

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

2/ The crosswise stretch measurement shall be evaluated on a Houchin modification of a Schieffer machine described in Method 7560 of FED-STD-191 and as shown on figure 2. The modified apparatus differs from the apparatus shown in FED-STD-191 with regard to the shape and size of the separating form. In lieu of the footlike form, a rectangular form of dimensions 2 by 4 inches (51 by 102 mm) shall be used. The sock shall be pulled over the form so that the 2-inch (51 mm) edges shall be parallel to the foot of the sock. The indicator pin shall be inserted in the upper 2-inch (51 mm) edge of the separating form and a 10-pound weight (4.5 kg) slowly applied so as to cause separation of the upper and lower slotted form with resultant stretch of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

sock under a uniform load over the 2-inch (51 mm) edges. The socks shall be evaluated after the weight has hung freely for 30 seconds and shall be expressed in inches as the distance between the upper and lower edges of the separated form.

3/ The lengthwise stretch of the socks shall be measured using the sock measuring machine apparatus and measurement of specimen procedure specified in Method 7560 of FED-STD-191. The measurement shall be taken to the nearest 0.1 of an inch (1 mm) and the measured stretch "foot length" obtained in accordance with this procedure shall be considered as the lengthwise foot stretch.

4/ The presser foot shall be circular with a diameter of 0.375 inch ± 0.001 inch (9.52 ± 0.03 mm) and with the moving parts connected therewith weighted so as to apply a total load of nine pounds per square inch. Two readings shall be taken on each of five specimens. The thickness of the sample unit shall be the average of ten results obtained from the specimens tested and shall be reported to the nearest 0.001 inch (0.01 mm).

4.4.4 Packaging inspection. An examination shall be made to determine that the preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of bundles per container is more or less than required. Number of pairs of socks per bundle is more or less than required. 1/ Size shown on one or more socks not as specified on shipping container. 1/

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. Each pair of socks shall be folded at the heels in accordance with industry practice. Five pairs of socks of one size only shall be evenly stacked in a bundle with every other pair reversed. Each bundle shall be securely tied around each end with cotton tape or twine.

5.1.2 Level C. Socks shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.1).

5.2.1 Level A packing. One hundred and ten pairs of socks of one size only, preserved-packaged as specified in 5.1, shall be packed within a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 2A of MIL-B-17757, except that the inspection shall be in accordance with 4.4.4. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A bundles shall be packed on edge, eleven in length, one in width and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight ($49\ g/m^2$) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. One hundred and ten pairs of socks of one size only, preserved-packaged as specified in 5.1, shall be packed within a fiberboard shipping container, assembled and closed conforming to class domestic, grade 275, size 2A of MIL-B-17757, except that the inspector shall be in accordance with 4.4.4. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A bundles shall be packed on edge, eleven in length, one in width and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.1), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Level C. Socks, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (127 mm x 101 mm) with the words "MIXED SIZES" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity of pairs and sizes container therein.

6. NOTES

6.1 Intended use. The socks covered by this specification are intended for use by personnel of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title and date of this specification.
(b) Sizes required (see 1.2).
(c) First article. When first article sample is required (see 3.1.3, 4.3 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to samples, address the procuring office issuing the invitation for bids.

6.4 Coloration. The standard sample was dyed with the following formulation of neutral premetallized dyes and has resulted in the levels of colorfastness cited in this purchase document:

Acid Red 182
Acid Yellow 151
Neutral Premetallized Olive Green B

This formulation is suggested, but is not mandatory.

6.4.1 Preparation. A thorough scouring and otherwise preparing the knitted socks for dyeing is essential in the attainment of satisfactory colorfastness. Scouring with a non-ionic detergent in the presence of tetrasodium pyrophosphate has been found to give adequate results.

6.4.2 Dyeing. It has been found necessary that the dye formulation include a compatible leveling agent such as Cibalan Salt S in conjunction with exhausting agents such as ammonium sulphate or acetate to optimize the rapid exhaustion rate of the dyestuffs being considered.

6.5 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of twelve pairs of finished socks in any size. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA

Review activities:

Army - MD
DLA - CT

User activity:

Navy - YD

Preparing activity:

Army - GL

Project No. 8440-0121

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

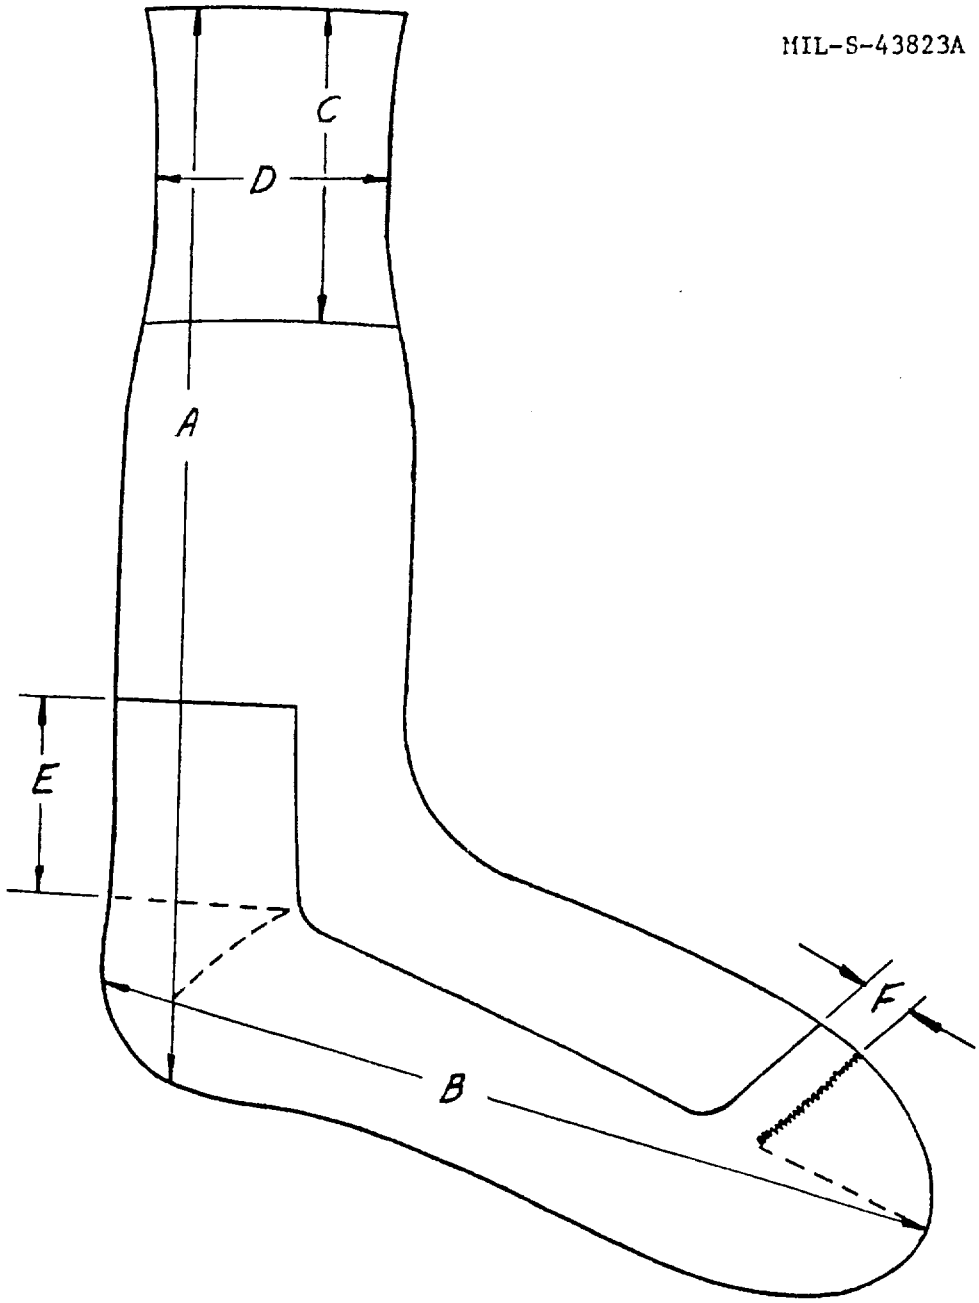


FIGURE 1 SOCKS, MEN'S, NYLON, CUSHION SOLE, STRETCH TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

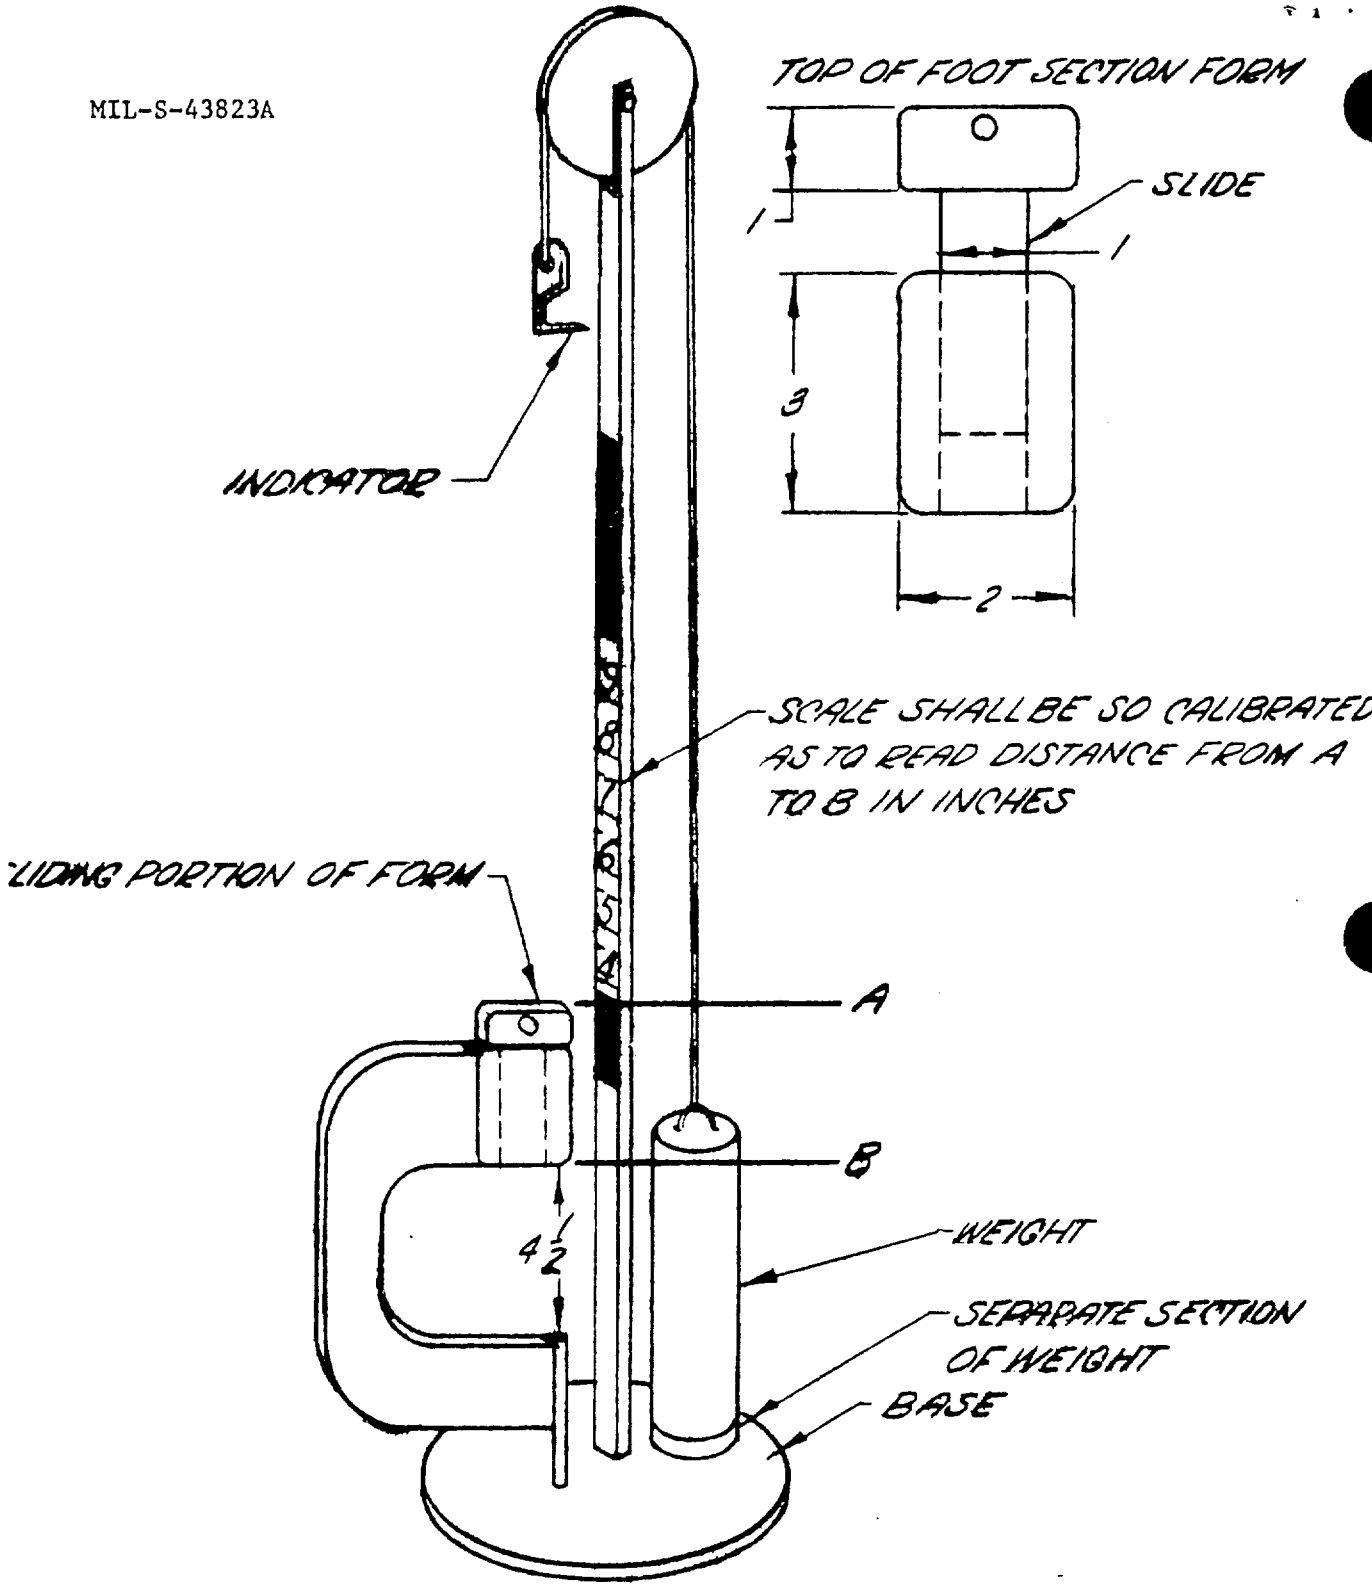


FIGURE 2, HOUCHIN MODIFICATION OF SCHIEFFER MACHINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43823A Socks, Men's, Nylon, Cushion Sole, Stretch Type, OG 106

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TDC

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD - 314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDC
Natick, MA 01760

NATICK OP 1 JUL 77

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:29Z
Check the source to verify that this is the current version before use.