MILITARY SPECIFICATION

TABLE-BENCH UNIT, DINING, FOLDING LEGS

(MUST)

1. SCOPE

1.1 This specification covers one type and size dining table-bench unit with folding legs (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-A-200/9	- Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 6063
QQ-A-225/8	- Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061
QQ-A-250/8	- Aluminum Alloy, 5052, Plate and Sheet
QQ-P-416	- Plating, Cadmium (Electrodeposited)
QQ-S-698	- Steel, Sheet and Strip, Low Carbon
QQ-T-830	- Tube, Steel, (Carbon, Mechanical; Seamless and Welded)
QQ-W-470	- Wire, Steel, Carbon, Spring, Music
WW-T-700/6	- Tube, Aluminum Alloy, Drawn, Seamless, 6061
PPP-B-636	- Boxes, Shipping, Fiberboard

STANDARDS

MILITARY

AN 10387	- Drill Sizes and Drilled Hole Tolerance, Twist
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-130	- Identification Marking of US Military Property
MS 9048	- Pin-Spring, Steel, Cadmium Plated

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

MS 20392 - Pin, Straight, Headed - Drilled Shank
MS 20470 - Rivet, Solid-Universal Head Aluminum and Aluminum Alloy
MS 24665 - Pin, Cotter, Split
MS 27183 - Washer, Flat Round, Steel, Cadmium Plated, General Purpose (In./mm)

DRAWINGS

ARMY NATICK LABORATORIES

5-11-1363 - Table - Bench Unit, Dining, Folding Legs; Drawing List

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

The Aluminum Association

Standards for Anodically Coated Aluminum Alloys for Architectural Application

(Application for copies should be addressed to the Aluminum Association 730 3rd Avenue, New York, New York 10017).

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036).

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2, 6.2, and 6.3).

3.2 Materials.- Materials shall conform to the requirements of the drawings referenced in 2.1 and to applicable referenced documents and the requirements specified herein.

3.3 Design and construction.- The table-bench unit shall be of the design and construction shown on the drawings listed in 2.1 and as specified herein, and shall assemble and disassemble as shown on figure 1, parts 1 and 2. The assembled unit shall have overall dimensions of 60 inches in length, 52 inches in width, a table top height of 30 inches and a bench top height of 18 inches (see assembly drawing). When assembled, the bench legs and table legs shall be held together by pins in slots, and the table leg and bench leg supports shall be held in place by removable pins which cannot be inadvertently displaced. When disassembled, the supporting components of the table shall fold up within the confines of the table top. Assembly and disassembly shall not require the use of tools. When tested as specified in 4.4.1, there shall be no evidence of parts breakage, parts separation, fracture of welds, permanent deformation, or misalignment of parts, and the assembled unit when placed on a flat level surface shall show no evidence of wobble and shall fold in accordance with figures 1, parts 1 and 2. Assembly and disassembly shall be accomplished without use of excessive force, bending or realignment of parts or components and all latches shall function easily, all retaining pins shall be easily inserted and removed and all fixed pins shall be properly aligned with pin holes.

3.4 Finish.- Finish shall be as specified on applicable drawings. Finish shall be applied to aluminum components after complete fabrication of the components, and shall be uniform in color, coverage and appearance.

3.5 Marking.- Marking shall be as specified on applicable drawings and shall be applied in accordance with MIL-STD-130.

3.6 Workmanship.- The finished unit shall be complete and clean. Prior to the application of finish all burrs, rough edges, sharp corners, and slivers shall be removed from components and all welds shall be cleaned.

3.6.1 Welds.- Fusion and plug welds shall be sound, smooth, and free of pits, burn through, fractures, or fissures. All flux and scale shall be removed. Spot welds shall be free of pits, flashes and excessive indentation. All welds shall be accomplished prior to application of finish.

3.6.2 Holes.- Holes for pins, rivets or fasteners shall be accurately drilled or punched and all burrs and slivers shall be removed prior to assembly of components and the application of finish.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:20Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a first article is required, it shall be examined for the defects listed in table 1, for compliance with dimensions specified, and tested as specified in 4.4.1. Failure to pass the test, the presence of any defect listed in table 1, or any dimension not within specified requirements shall be cause for rejection of the first article.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except as otherwise indicated hereinafter.

4.3.1 Components and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 Process examination.- Examination shall be made of the following processes to determine compliance with specified requirements. Whenever nonconformance is noted correction shall be made to the affected items and process.

(a) Components.- Components shall be examined prior to the application of finish to determine compliance with the finish preparation requirements of 3.6.

(b) Welds.- All fusion, plug, and spot welds shall be examined prior to the application of finish to determine compliance with the weld requirements of 3.6.1.

(c) Holes.- All holes shall be examined prior to assembly and finish of components to determine compliance with the hole requirements of 3.6.2.

4.3.3 End item inspection.- The inspection lot shall consist of all units offered for inspection at one time. The sample unit shall be one completely fabricated table-bench unit.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:20Z
Check the source to verify that this is the current version before use.

4.3.3.1 Visual examination.- Examination shall be made of the end item for the defects listed in table 1. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Color or finish not as specified	X	
	Area of no coverage	X	
	Not continuous, smooth or of uniform color	X	
	Imbedded foreign matter	X	
	Dirty		X
Construction (General)	Any component missing	X	
	Components not type specified	X	
	Burrs, slivers, sharp edges, sharp corners	X	
	Rivet heads not flush against joined members, when applicable	X	
	Rivets, used as pivot pins, does not permit component to pivot	X	
Spot welds	Excessive indentation on spot welds	X	
	Unsound	X	
	Flash or spatter		X
Fusion welds	Not continuous, not smooth, unsound, porosity, cracks, burn through, flash imbedded foreign matter	X	
Marking	Missing, incomplete, illegible incorrect, location not as shown on drawings		X

4.3.3.2 Dimensional examination.- An examination shall be made to determine compliance with dimension specified. Any nonconformance shall be considered a defect. The inspection level shall be S-2 with an AQL of 2.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:20Z
Check the source to verify that this is the currentversion before use.

4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examination	Defect
Markings, exterior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Workmanship	Components not secured

4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4 Test.-

4.4.1 Static load.- The table-bench unit shall be assembled on a flat level surface and a weight of not less than 200 pounds shall be distributed evenly on the table top and a weight of not less than 600 pounds shall be distributed evenly over the top surface of each bench. The weights shall remain in place for not less than 10 minutes. While the weights are in place, a horizontal force of not less than 150 pounds shall then be applied to a bench end at a height of not less than 16 inches from the floor for not less than 3 minutes and repeated on each end of each bench. The unit shall be examined with the weights in place and while the horizontal forces are being applied and after the horizontal force and weights are removed to determine compliance with the static load and wobble requirements of 3.3. The unit shall then be disassembled and reassembled as shown on figure 1, parts 1 and 2 to determine compliance with the assembly and disassembly requirements of 3.3. Any noncompliance with specified requirements shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging shall be level A.

5.1.1 Level A.- Each table-bench unit shall be disassembled and folded as shown on figure 1, parts 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Each table-bench unit, folded as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC (end-opening), V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Each table-bench unit, folded as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC (end-opening), type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with Method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C.- Table-bench units, folded as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The table-bench unit covered by this specification is intended for use in medical dining facilities (MUST).

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1, 4.2, and 6.3).
(c) Selection of the applicable level of packing (see 5.2).
(d) When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.2.1 Contract data requirements.- Any requirements for equipment manuals for the item covered by this specification should be included in DD Form 1423 Contract Data Requirements List, and cited in the contract.

6.3 First Article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:20Z
Check the source to verify that this is the current version before use.

Regulations ASPR 7-104.55 The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Supersession data.- This specification includes the requirements of Interim Purchase Description S-34-8 dated 2 August 1968.

Custodian:

Army - GL

Review activities:


Army - MD, ME

Preparing activity:


Army - GL

Project No. 7105-A196


Source: https://assist.dla.mil -- Downloaded: 202610-21T22:20Z
Check the source to verify that this is the current version before use.

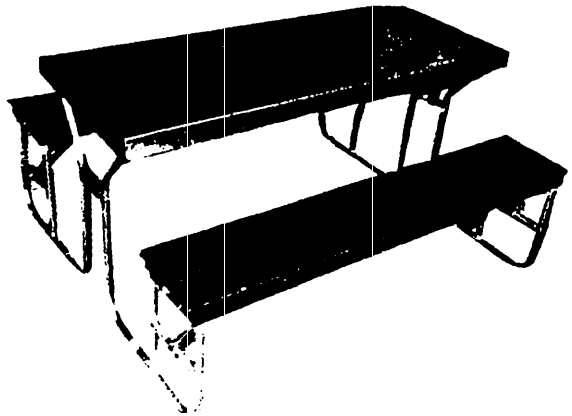


1. ASSEMBLED DINING AREA TABLE.

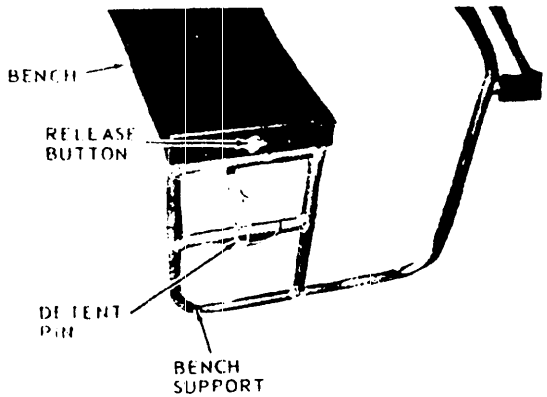

2. PULL DETENT PINS (TYPICAL 4 PLACES). DEPRESS RELEASE BUTTON AND LIFT BENCH FROM BENCH SUPPORTS.

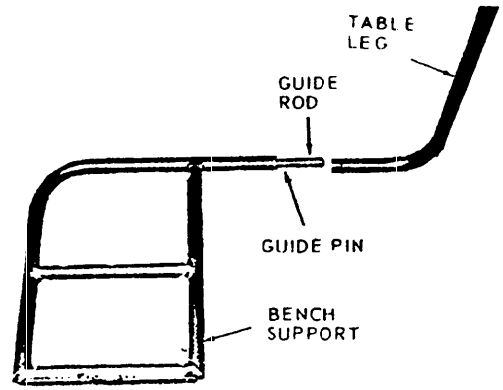

3. ROTATE BENCH SUPPORT 90° OUTWARD AND PULL GUIDE ROD AND GUIDE PIN FROM TABLE LEG.

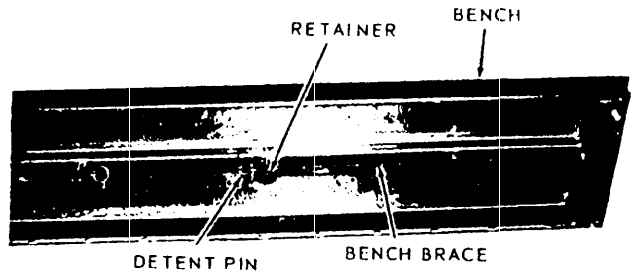


4. TURN BENCH UPSIDE DOWN. FOLD BENCH BRACE AND ALINE WITH RETAINER. INSERT DETENT PIN.


MIL-B-43787(GL)

FIGURE 1, Part 1.- Folding Sequence


Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:20Z
Check the source to verify that this is the current version before use.

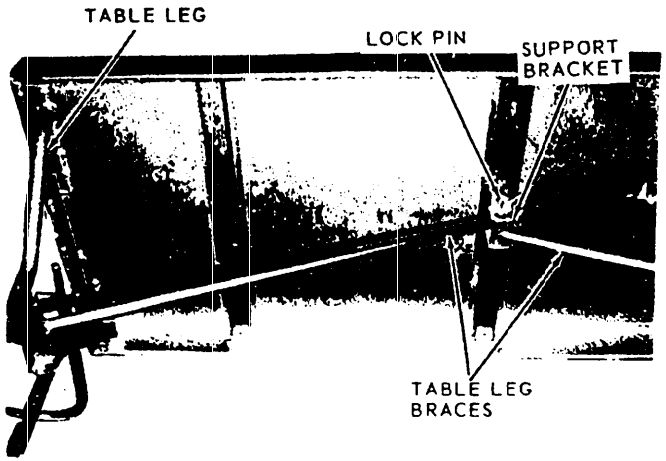


5. TIP TABLE AND REST ON A SIDE. PULL LOCK PIN FROM SUPPORT BRACKET.

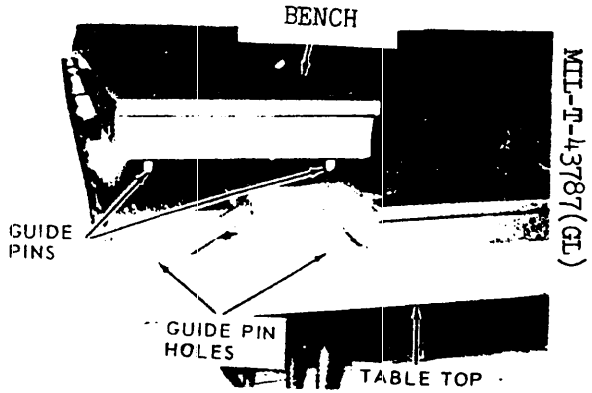

7. PLACE BENCHES ON FOLDED TABLE TOP. ALINE GUIDE PINS WITH GUIDE PIN HOLES.

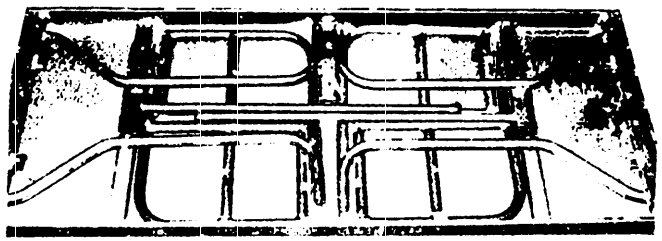

6. TURN TABLE UPSIDE DOWN. FOLD TABLE LEGS AND BRACES. SECURE BRACES BY REPLACING LOCK PIN IN SUPPORT BRACKET.

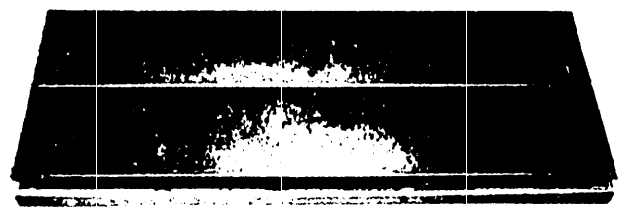

8. FOLDED TABLE ASSEMBLY.

FIGURE 1, Part 2.- Folding Sequence

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Table-Bench Unit, Dining, Folding Legs (MUST); MIL-T-43787(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:20Z
Check the source to verify that this is the current version before use.