MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

SWITCHES, SENSITIVE

TO ALL HOLDERS OF DOD-STD-35-138(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-138(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
1	5 January 1979	(Reprinted without change)	
2	30 May 1980	2	5 January 1979
13	30 May 1980	13	5 January 1979
21	5 January 1979	(Reprinted without change)	
22	30 May 1980	22	5 January 1979
23	30 May 1980	23	5 January 1979
24	5 January 1979	(Reprinted without change)	
39	5 January 1979	(Reprinted without change)	
40	30 May 1980	40	5 January 1979
41	30 May 1980	41	5 January 1979
42	5 January 1979	(Reprinted without change)	
175	5 January 1979	(Reprinted without change)	
176	30 May 1980	176	5 January 1979

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
194a	30 May 1980	208a	30 May 1980
194b	30 May 1980	208b	30 May 1980
194c	30 May 1980	216a	30 May 1980
202a	30 May 1980	216b	30 May 1980
202b	30 May 1980	220a	30 May 1980
202c	30 May 1980		

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of DOD-STD-35D(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for sensitive switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, SENSITIVE	Ø14366	MIL-S-8805	GENERAL SPECIFICATION
		MIL-S-13484	AUTOMOTIVE 30 VDC MAX
		MIL-S-13625	AUTOMOTIVE 28 VDC MAX BEAM SELECTING
		MIL-S-22614	FIRE CONTROL EQUIPMENT
		MIL-S-24317	MULTISTATION
		MIL-S-83504	DUAL IN-LINE PACKAGE
		MS39058	24 VDC WATERPROOF
ACTUATOR, SENSITIVE SWITCH	Ø14378	MIL-S-8805	GENERAL SPECIFICATION
SWITCH, PUSH	Ø14362	MIL-S-8805	GENERAL SPECIFICATION
SWITCH, PUSH BUTTON	Ø14379	MIL-S-8805	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2750	CURRENT CARRYING MOTOR LOAD DC AMPERES	2802	CURRENT CARRYING DRY CKT DC AMPERES	2751	CURRENT CARRYING MOTOR LOAD AC VOLTS
2803	CURRENT CARRYING DRY CKT AC VOLTS	2752	CURRENT CARRYING MOTOR LOAD AC VOLTAGE FREQUENCY HERTZ	2804	CURRENT CARRYING DRY CKT AC VOLTAGE FREQUENCY HERTZ
2753	CURRENT CARRYING MOTOR LOAD AC AMPERES	2805	CURRENT CARRYING DRY CKT AC AMPERES	2010	CONTACT ARRANGE-MENT (POLE)
2012	CONTACT ARRANGE-MENT (THROW)	2328	MINIMUM OPERATING FORCE NEWTONS	2332	MINIMUM OPERATING FORCE OUNCES
2334	MINIMUM OPERATING FORCE POUNDS	2336	MAXIMUM OPERATING FORCE NEWTONS	2340	MAXIMUM OPERATING FORCE OUNCES
2342	MAXIMUM OPERATING FORCE POUNDS	3100	MINIMUM RELEASE FORCE OUNCES	3102	MINIMUM RELEASE FORCE POUNDS
3104	MINIMUM RELEASE FORCE NEWTONS	3106	MAXIMUM PRETRAVEL INCH	3108	MAXIMUM PRETRAVEL MILLIMETER
3110	MINIMUM OVERTRAVEL INCH	3112	MINIMUM OVERTRAVEL MILLIMETER	2018	BUTTON COLOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING
5069	THE MAXIMUM OPERATTNG TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
RATED LIFE	
MECHANICAL (ACTUATIONS)	1700
ELECTRICAL (ACTUATIONS)	1702

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	RATED LIFE.
1700	THE MECHANICAL LIFE SHALL BE 1700 ACTUATIONS.
1702	THE ELECTRICAL LIFE SHALL BE 1702 ACTUATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS	
CURRENT CARRYING CAPACITY	
NOTE: SEE RATED LOAD TABLE.	

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1611 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A STRAIGHT WIRE ACTUATOR LEVER.

1612 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A PUSHBUTTON ACTUATOR LEVER.

1613 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A TOGGLE ACTUATOR LEVER.

1610 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A 1610 ACTUATOR LEVER.

TERMINALS.

THE SWITCH TERMINALS SHALL BE AS SPECIFIED IN THE TERMINAL CONFIGURATION TABLE.

TERMINAL CONFIGURATION TABLE

ITEM	SIZE	LENGTH/THICKNESS	QTY
SCREW LUG	3000	3001	3002
WIRE LEAD, SIDE EXIT	3003	3004	3005
WIRE LEAD, BOTTOM EXIT	3006	3007	3008
SINGLE TURRET	3009	3010	3011
DOUBLE TURRET	3012	3013	3014
J-HOOK	3015	3016	3017
SOLDER EYE	3018	3019	3020
SOLDER LUG	3021	3022	3023
SLIP-ON LUG	3024	3025	3026
CONNECTOR	3027	3028	3029

1614 TERMINAL HARDWARE SHALL BE 1614.

3031 ADDITIONAL TERMINAL REQUIREMENTS SHALL BE 3031.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACT ARRANGEMENT	
CIRCUIT (NUMBER)	2000
FORM (DESIGNATION)	2002
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	2004
SPDT.	2006
DPDT.	2008
POLE (NUMBER)	2010
*THROW (NUMBER)	2012
BUTTON COLOR (NAME)	2018
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE AS FOLLOWS:
2000	2000 CIRCUIT.
2002	FORM 2002.
2004	SINGLE POLE, SINGLE THROW.
2006	SINGLE POLE, DOUBLE THROW.
2008	DOUBLE POLE, DOUBLE THROW.
2010 2012	2010 POLE, 2012 THROW.
2018	BUTTON COLOR. THE BUTTON COLOR SHALL BE 2018.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.


Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.


KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2900
(MILLISECONDS)	2902
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING MEANS.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

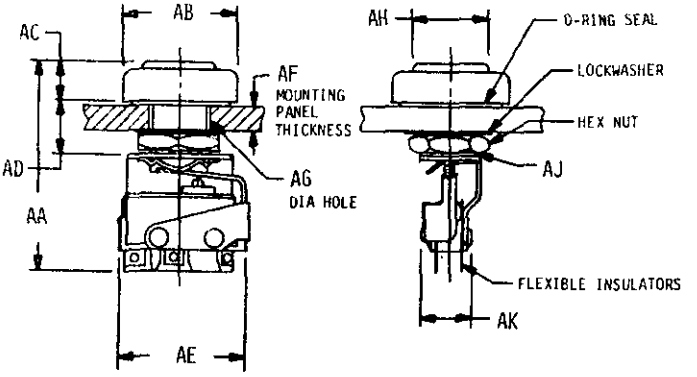


014-08-6

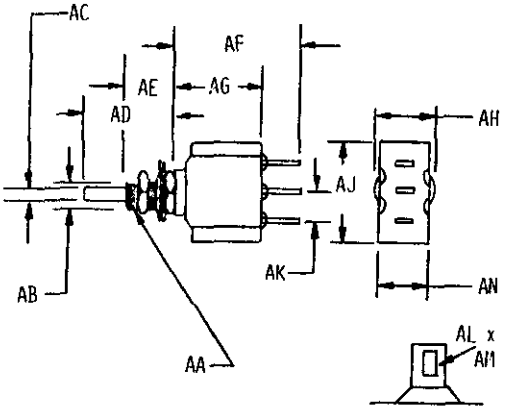

014-08-7

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

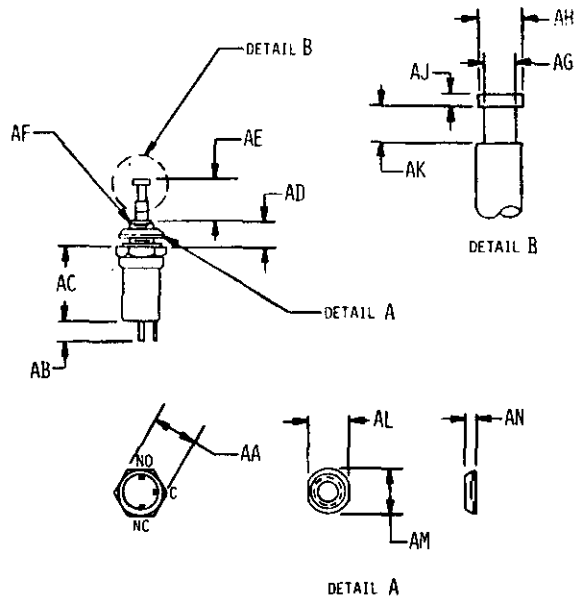

014-08-8

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

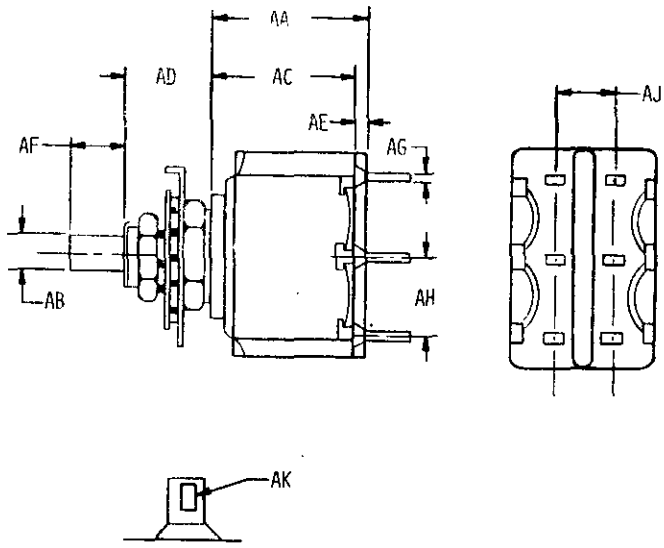

Ø14-Ø8-9

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

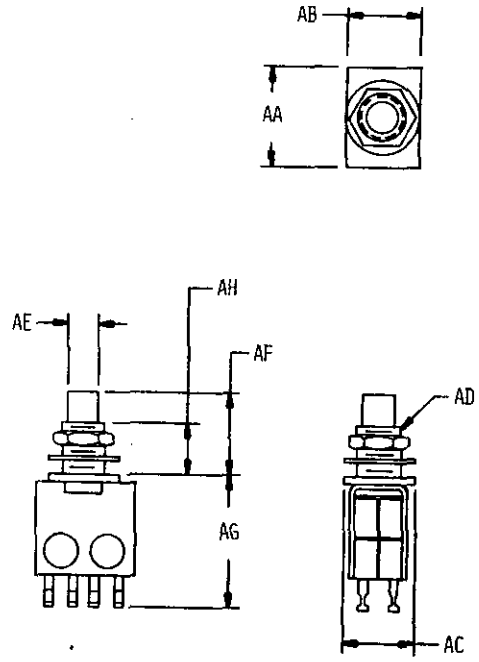


014-12-15

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

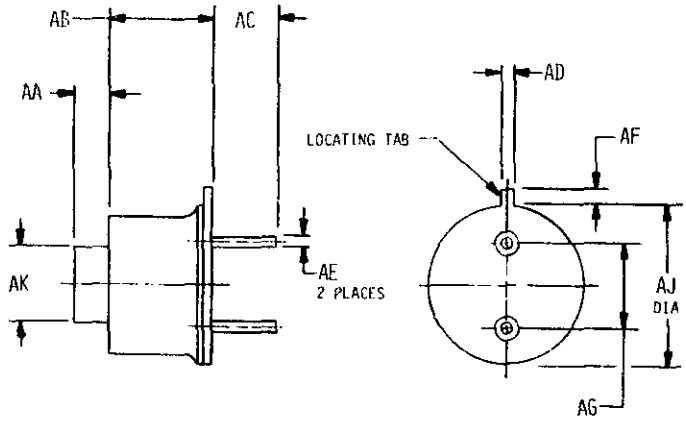


014-12-17

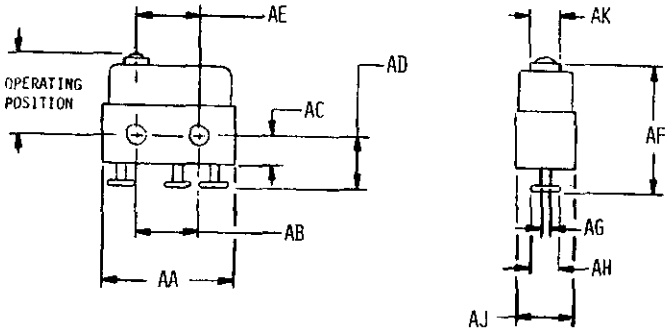

014-12-18

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

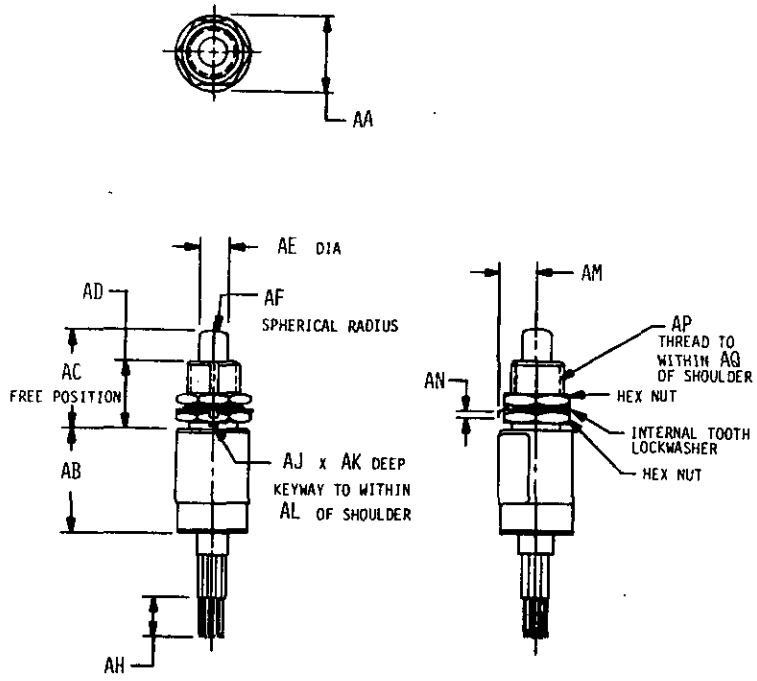

014-16-8

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

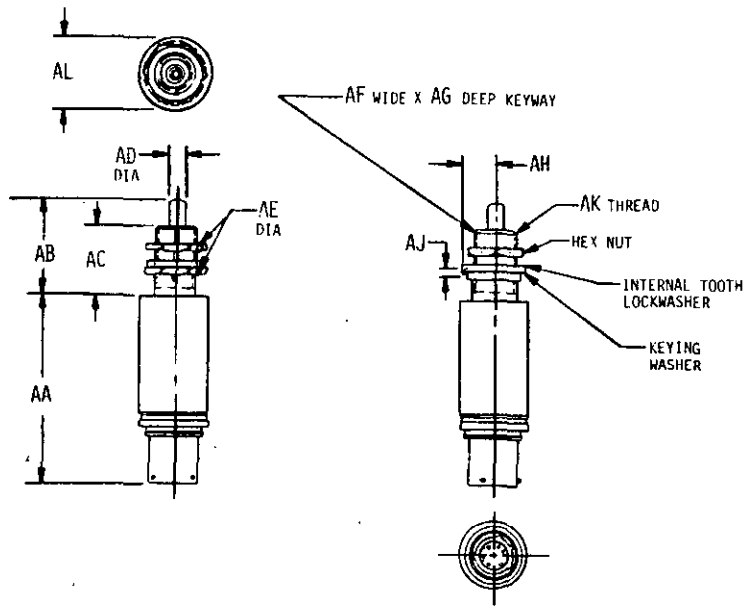

014-16-9

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

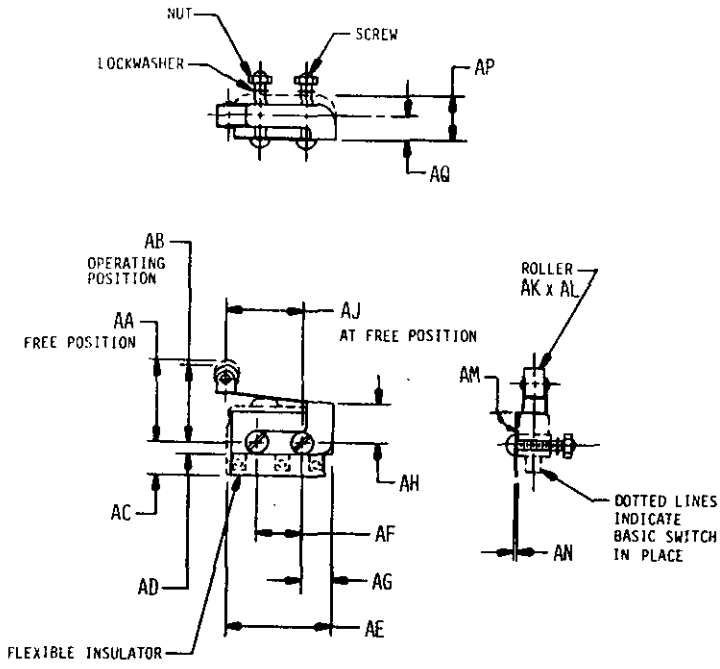


014-24-4


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.

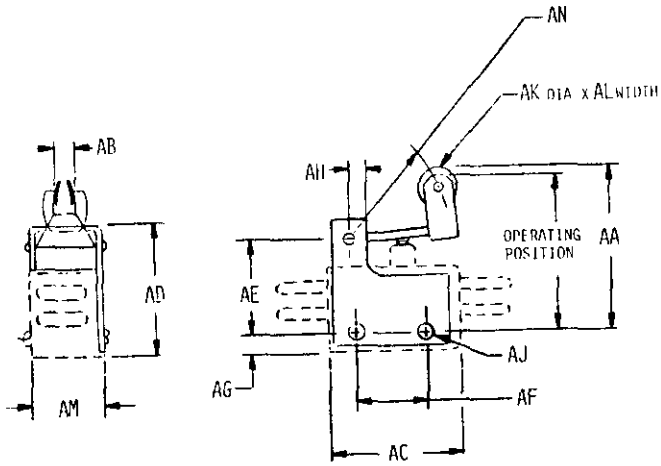

Ø14-24-5



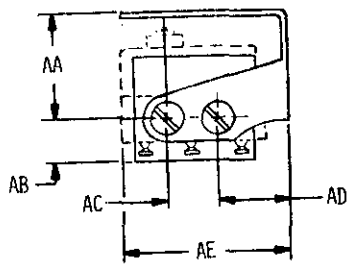


Ø14-24-6

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.



014-31-25



014-31-24

New page

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2807 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:06Z
Check the source to verify that this is the current version before use.