NOTICE OF CHANGE

INCH-POUND

MIL-STD-348A
NOTICE 2
21 July 1992

MILITARY STANDARD

RADIO FREQUENCY CONNECTOR INTERFACES FOR

MIL-C-3643, MIL-C-3650, MIL-C-3655, MIL-C-25516,
MIL-C-26637, MIL-C-39012, MIL-C-49142, MIL-A-55339,
AND MIL-C-83517

TO ALL HOLDERS OF MIL-STD-348A:

1. THE FOLLOWING PAGES OF MIL-STD-348A ARE NEW OR HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
iii		iii	12 January 1990
iv		iv	12 January 1990
v/vi		v	12 January 1990
SECTION 300		SECTION 300	12 January 1990
310.1		310.1	12 January 1990
310.2		310.2	12 January 1990
310.3/310.4		310.3	12 January 1990
323.1		NEW	---
323.2		NEW	---
325.1		NEW	---
325.2		NEW	---

2. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

3. Holders of MIL-STD-348A will verify that page changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the military standard is completely revised or canceled.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, AV, MI
Navy - AS, SH
Air Force - 10, 11, 17, 99
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3815)

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

CONTENTS

		Page
1.	SCOPE	1
1.1	Purpose	1
1.2	Scope	1
2.	REFERENCED DOCUMENTS	2
2.1	Government documents	2
2.1.1	Specification, and standard	2
2.2	Order of precedence	2
3.	DEFINITIONS	3
3.1	Terms	3
4.	GENERAL REQUIREMENTS	4
5.	DETAILED REQUIREMENTS	5
5.1	Gauge tests	5
5.2	Marking	5
5.3	Drawing notes	5
5.4	Change effectivity	5
5.5	Disposition of stock	5
6.	NOTES	6
6.1	Intended use	6
6.2	Patent notice	6
6.3	Subject term (key word) listing	6
6.4	Changes from previous issue	6

FIGURES

Figure	101-1.	Interface, series TWTNC, coupling nut	101.1
	101-2.	Interface, series TWTNC, no coupling nut	101.2
	102-1.	Interface, series TWBNC, with coupling nut	102.1
	102-2.	Interface, series TWBNC, coupling nut	102.2
	102-3.	Interface, series TWBNC, without coupling nut	102.3
	103-1.	Interface, series TWSMC, with coupling nut	103.1
	103-2.	Interface, series TWSMC, without coupling nut	103.2
	104-1.	Interface, series TWSMB, with coupling mechanism	104.1
	104-2.	Interface, series TWSMB, without coupling mechanism	104.2
	201-1.	Interface, series TRB, pin contact	201.1
	201-2.	Interface, series TRB, socket contact	201.2
	202-1.	Interface, series TRT, pin contact	202.1
	202-2.	Interface, series TRT, socket contact	202.2
	301-1.	Interface, series BNC, pin contact	301.1
	301-2.	Interface, series BNC, socket contact	301.2
	302-1.	Interface, series C, pin contact	302.1
	302-2.	Interface, series C, socket contact	302.2
	303-1.	Interface, series MHV, pin contact	303.1
	303-2.	Interface, series MHV, socket contact	303.2
	304-1.	Interface, series N, pin contact	304.1
	304-2.	Interface, series N, socket contact	304.2
	305-1.	Interface, series QL, pin contact	305.1
	305-2.	Interface, series QL, socket contact	305.2

Supersedes page iii of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

CONTENTS

		Page
306-1.	Interface, series QM, pin contact	306.1
306-2.	Interface, series QM, socket contact	306.2
307-1.	Interface, series QNC, pin contact	307.1
307-2.	Interface, series QNC, socket contact	307.2
308-1.	Interface, series QSC, pin contact	308.1
308-2.	Interface, series QSC, socket contact	308.2
309-1.	Interface, series SC, pin contact	309.1
309-2.	Interface, series SC, socket contact	309.2
310-1.	Interface, series SMA, pin contact	310.1
310-2.	Interface, series SMA, socket contact	310.2
310-3.	Interface, series SMA, no contact	310.3
311-1.	Interface, series SMB, pin contact	311.1
311-2.	Interface, series SMB, socket contact	311.2
312-1.	Interface, series SMC, pin contact	312.1
312-2.	Interface, series SMC, socket contact	312.2
313-1.	Interface, series TNC, pin contact	313.1
313-2.	Interface, series TNC, socket contact	313.2
313-3.	Interface, series TNCA, pin contact, air interface	313.3
313-4	Interface, series TNCA, socket contact, air interface	313.4
314-1.	Interface, series SHV, pin contact	314.1
314-2.	Interface, series SHV, socket contact	314.2
315-1.	Interface, series LC, pin contact	315.1
315-2.	Interface, series LC, socket contact	315.2
315-3.	Interface, series LC, pin contact	315.3
315-4.	Interface, series LC, socket contact	315.4
315-5.	Interface, series LC, pin contact	315.5
315-6.	Interface, series LC, socket contact	315.6
316-1.	Interface, coaxial environment resistant	316.1
316-2.	Interface, coaxial environment resistant	316.2
316-3.	Interface, coaxial environment resistant	316.3
316-4.	Interface, coaxial environment resistant	316.4
317-1.	Interface, series HN, pin contact	317.1
317-2.	Interface, series HN, socket contact	317.2
318-1.	Interface, series LT, no contact	318.1
318-2.	Interface, series LT, socket contact	318.2
319-1.	Interface, series SSMA, pin contact	319.1
319-2.	Interface, series SSMA, socket contact	319.2
320-1.	Interface, series SSMB, pin contact	320.1
320-2.	Interface, series SSMB, socket contact	320.2
321-1.	Interface, series BMA, pin contact	321.1
321-2.	Interface, series BMA, socket contact	321.2
321-3.	Interface dimension table, series BMA	321.3
322-1.	Interface, series BMB, pin contact	322.1
322-2.	Interface, series BMB, socket contact	322.2
323-1.	Interface, series SMK, pin contact	323.1
323-2.	Interface, series SMK, socket contact	323.2
325-1.	Interface, series BMZ, pin contact	325.1
325-2.	Interface, series BMZ, socket contact	325.2
401-1.	Interface, test connector, series C, pin contact	401.1
401-2.	Interface, test connector, series C, socket contact	401.2
401-3.	Interface, mated test connector, series C	401.3
402-1.	Interface, test connector, series N, pin contact	402.1
402-2.	Interface, test connector, series N, socket contact	402.2
402-3.	Interface, mated test connector, series N	402.3

Supersedes page iv of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

CONTENTS

		Page
403-1.	Interface, test connector, series SC, pin contact	403.1
403-2.	Interface, test connector, series SC, socket contact	403.2
403-3.	Interface, mated test connector, series SC	403.3
404-1.	Interface, test connector, series BNC, pin contact	404.1
404-2.	Interface, test connector, series BNC, socket contact	404.2
404-3.	Interface, mated test connector, series BNC	404.3
405-1.	Interface, test connector, series SMA, pin contact	405.1
405-2.	Interface, test connector, series SMA, socket contact	405.2
405-3.	Interface, mated test connector, series SMA	405.3
406-1.	Interface, test connector, series TNC, pin contact	406.1
406-2.	Interface, test connector, series TNC, socket contact	406.2
406-3.	Interface, mated test connector, series TNC	406.3
407-1.	Interface, test connector, series SMB, pin contact	407.1
407-2.	Interface, test connector, series SMB, socket contact	407.2
407-3.	Interface, mated test connector, series SMB	407.3
408-1.	Interface, test connector, series SMC, pin contact	408.1
408-2.	Interface, test connector, series SMC, socket contact	408.2
408-3.	Interface, mated test connector, series SMC	408.3
409-1.	Interface, test connector, series QNC, pin contact	409.1
409-2.	Interface, test connector, series QNC, socket contact	409.2
409-3.	Gap of mated standard test connector, series QNC	409.3
410-1.	Interface, test connector, series QSC, pin contact	410.1
410-2.	Interface, test connector, series QSC, socket contact	410.2
410-3.	Gap of mated standard test connector, series QSC	410.3

Supersedes page v of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.


SECTION 300


Interface Dimensions for MIL-C-3643, MIL-C-3650, MIL-C-26637, MIL-C-39012, MIL-A-55339, and MIL-C-83517

Section 301	Series BNC
Section 302	Series C
Section 303	Series MHV
Section 304	Series N
Section 305	Series QL
Section 306	Series QM
Section 307	Series QMC
Section 308	Series QSC
Section 309	Series SC
Section 310	Series SMA
Section 311	Series SMB
Section 312	Series SMC
Section 313	Series TNC and TNCA
Section 314	Series SHV
Section 315	Series LC
Section 316	Environment resistant
Section 317	Series HN
Section 318	Series LT
Section 319	Series SSMA
Section 320	Series SSMB
Section 321	Series BMA
Section 322	Series BMB
Section 323	Series SMK
Section 324	Reserved for 2.4 mm
Section 325	Series BMZ

Supersedes section 300 of Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

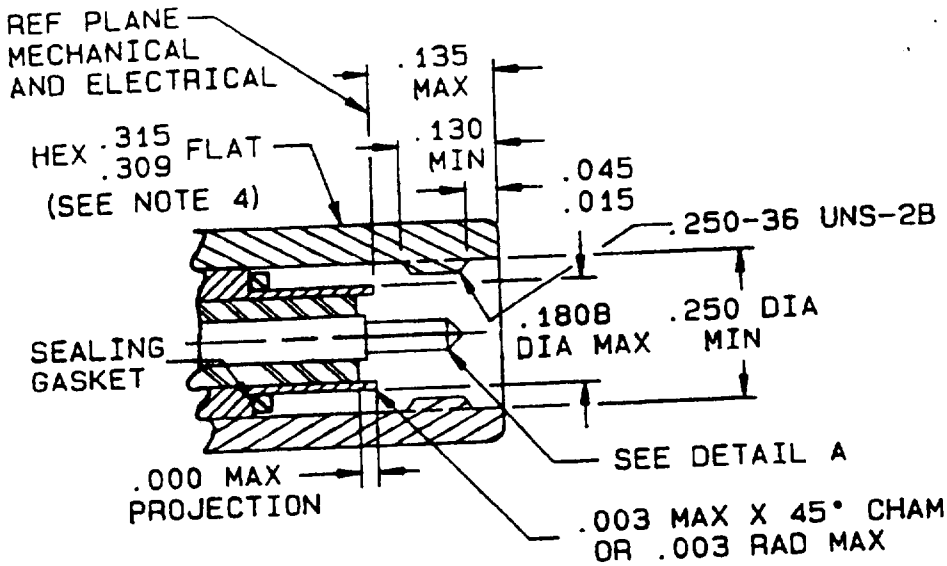

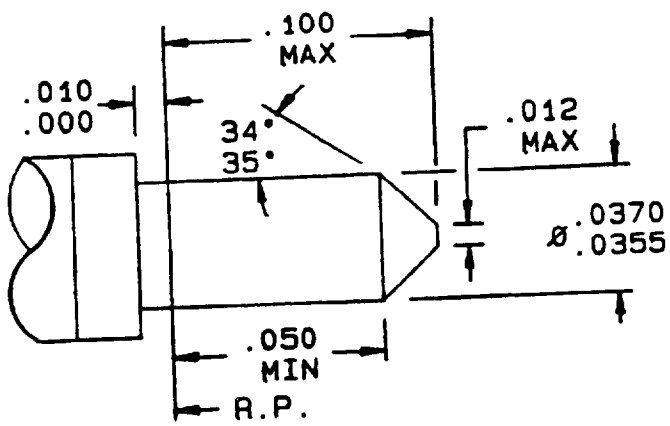

DETAIL A


Inches	mm
.000	0.00
.003	0.08
.010	0.25
.012	0.30
.015	0.38
.0355	0.900
.0370	0.940
.045	1.14
.050	1.27
.100	2.54
.130	3.30
.135	3.43
.1808	4.590
.250	6.35
.309	7.85
.315	8.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Connector interfaces (after connector mating) shall be kept free from dust and moisture.
4. May extend throughout the full length of the coupling nut.


FIGURE 310-1. Interface, series SMA, pin contact.


Supersedes page 310.1 of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

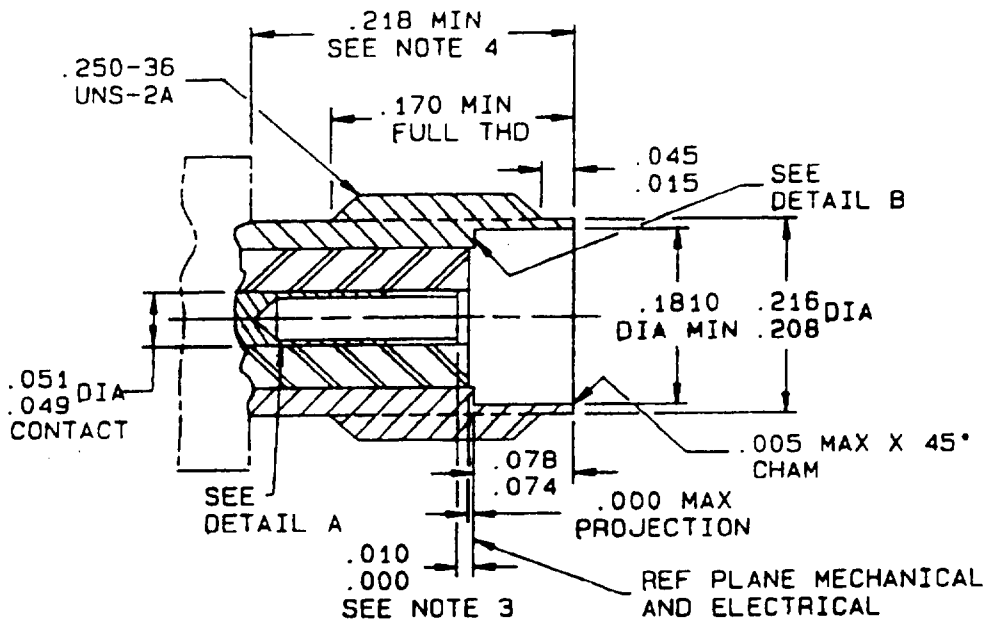

Inches	mm
.005	0.13
.008	0.20
.010	0.25
.015	0.38
.0355	0.900
.0370	0.940
.043	1.08
.045	1.14
.047	1.19
.049	1.24
.051	1.29
.074	1.88
.078	1.98
.105	2.67
.168	4.27
.170	4.32
.1810	4.597
.208	5.28
.216	5.49
.218	5.54
.250	6.35

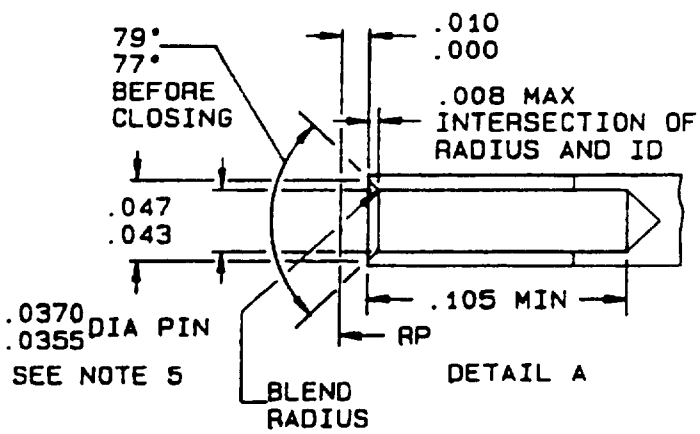

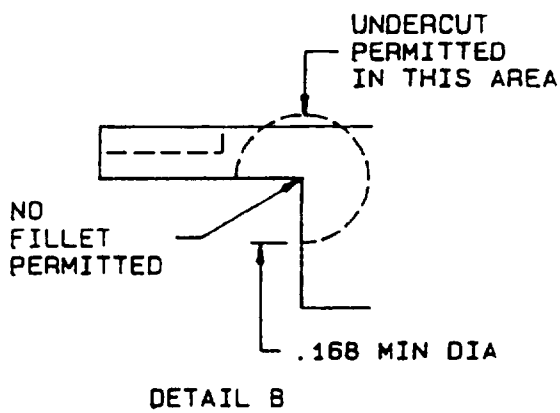


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Previously qualified parts utilizing a .030 inch maximum contact recession are not acceptable for Government procurement. Caution should be exercised to determine whether a .030 inch recession design is being used during maintenance and part replacement.
4. Clearance for mating connector coupling nut.
5. Dimension to meet VSWR, mating characteristics, and connector durability when mated with a .0355 - .0370 diameter pin

FIGURE 310-2. Interface, series SMA, socket contact.

Supersedes page 310.2 of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

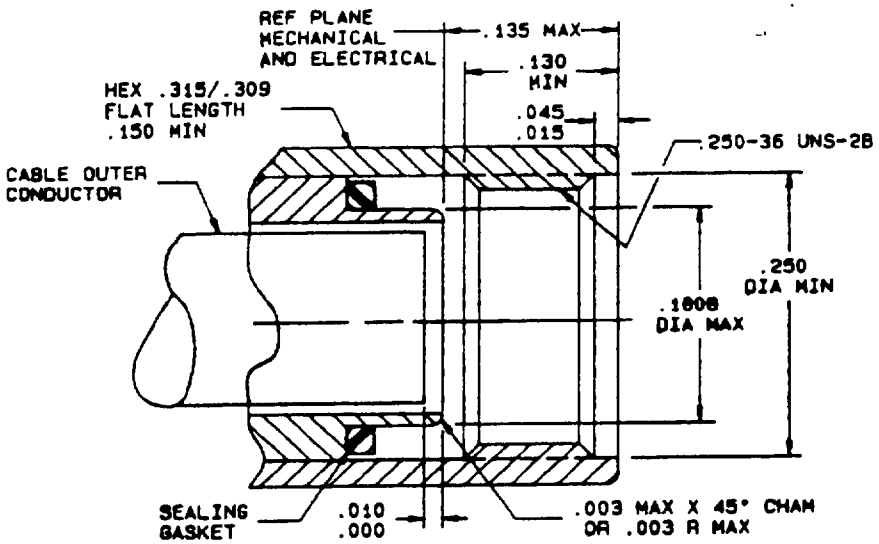


Inches	mm
.000	0.00
.003	0.08
.010	0.25
.015	0.38
.045	1.14
.130	3.30
.135	3.43
.150	3.81
.1808	4.59
.250	6.35
.309	7.85
.315	8.00


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Reference MIL-C-39012/92 for cable stripping dimensions.

FIGURE 301-3. Interface, series SMA, no contact.

Supersedes page 310.3 of
Notice 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

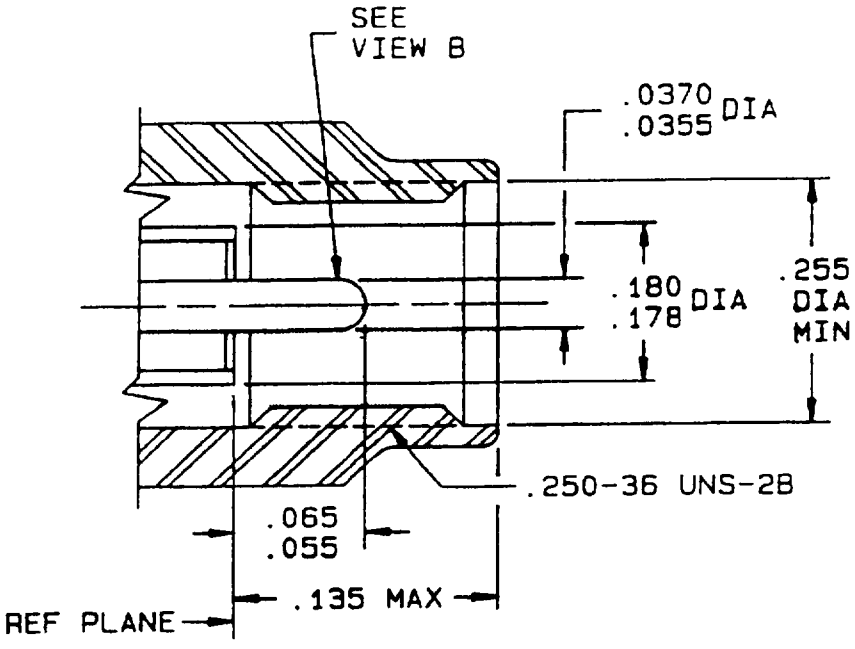

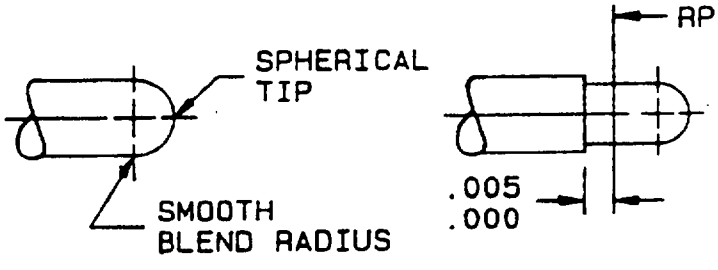


Inches	mm
.000	0.00
.005	0.13
.0355	0.900
.0370	0.940
.055	1.40
.065	1.65
.135	3.43
.178	4.52
.180	4.59
.250	6.35
.255	6.48

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The location of the contact support bead shall not extend beyond the reference plane.

FIGURE 323-1. Interface, series SMK, pin contact.

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

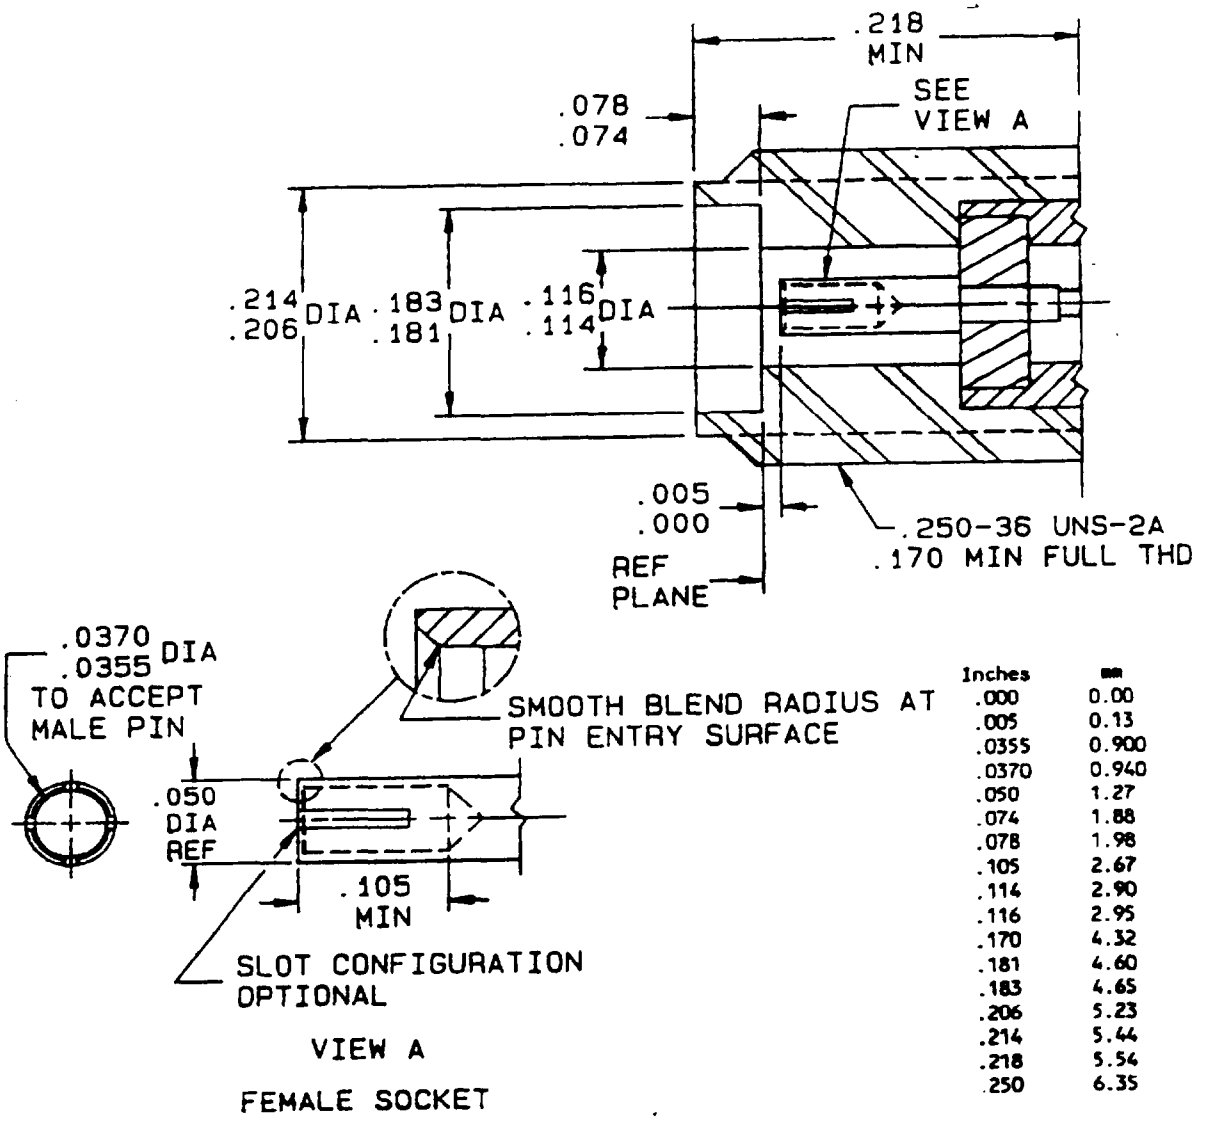


Inches	mm
.000	0.00
.005	0.13
.0355	0.900
.0370	0.940
.050	1.27
.074	1.88
.078	1.98
.105	2.67
.114	2.90
.116	2.95
.170	4.32
.181	4.60
.183	4.65
.206	5.23
.214	5.44
.218	5.54
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005.

FIGURE 323-2. Interface, series SMK, socket contact.

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

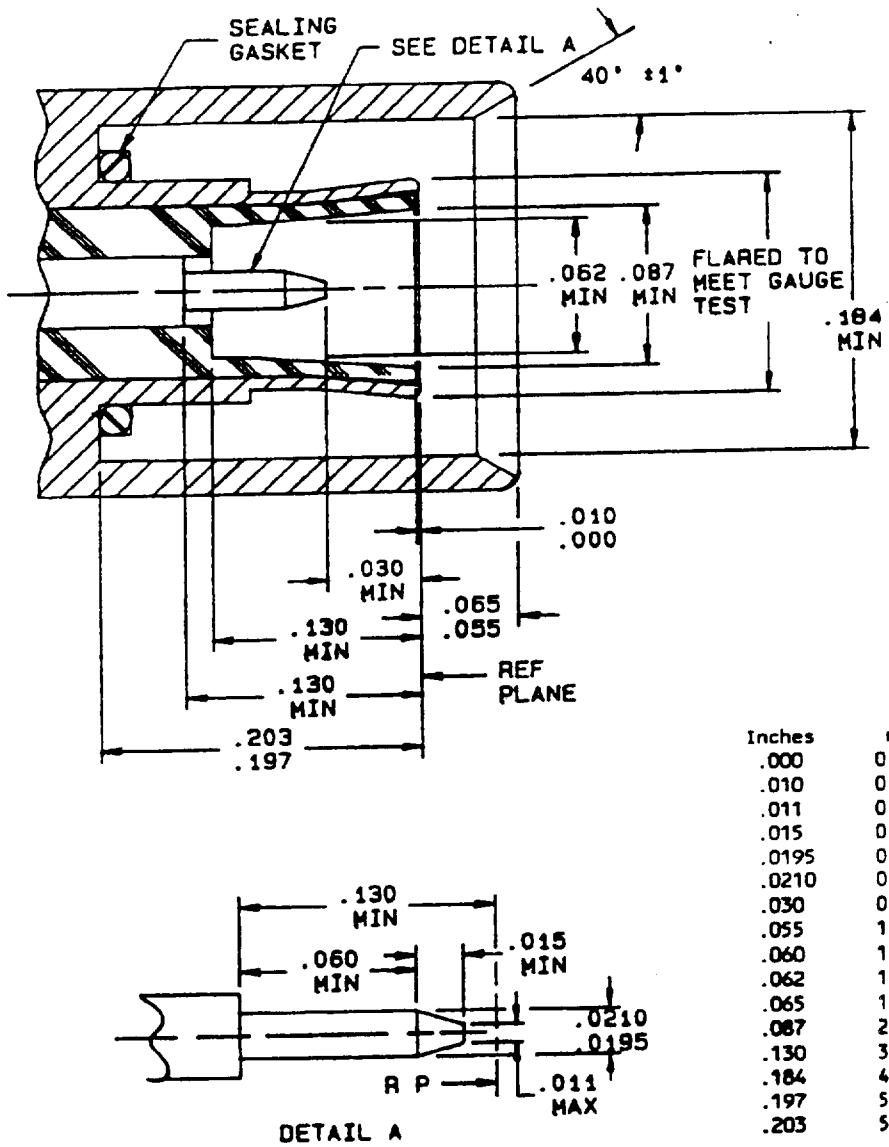


Inches	mm
.000	0.00
.010	0.25
.011	0.30
.015	0.38
.0195	0.50
.0210	0.53
.030	0.76
.055	1.40
.060	1.52
.062	1.57
.065	1.65
.087	2.21
.130	3.30
.184	4.67
.197	5.00
.203	5.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 325-1. Interface, series BMZ, pin contact.

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.

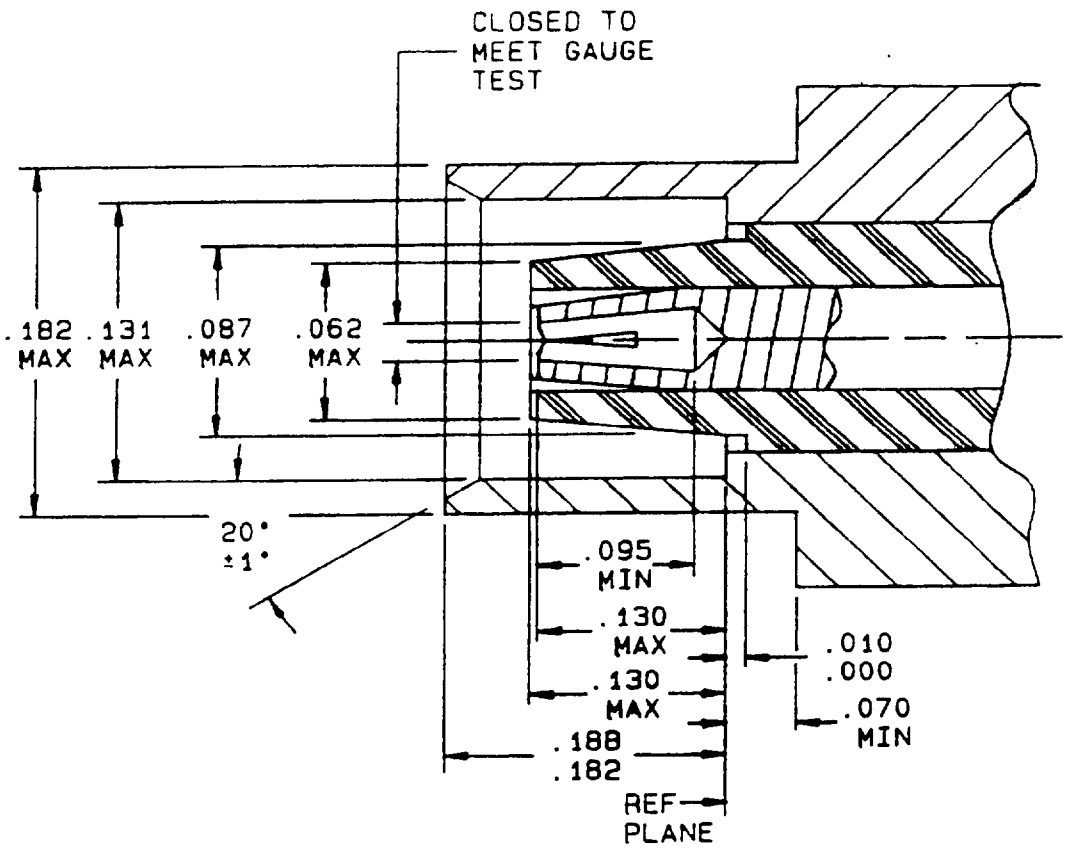

Inches	mm
.000	0.00
.010	0.25
.062	1.57
.070	1.78
.087	2.21
.095	2.31
.130	3.30
.131	3.33
.182	4.62
.188	4.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 325-2. Interface, series BMZ, socket contact.

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:59Z
Check the source to verify that this is the current version before use.