FED. SUP CLASS
8140

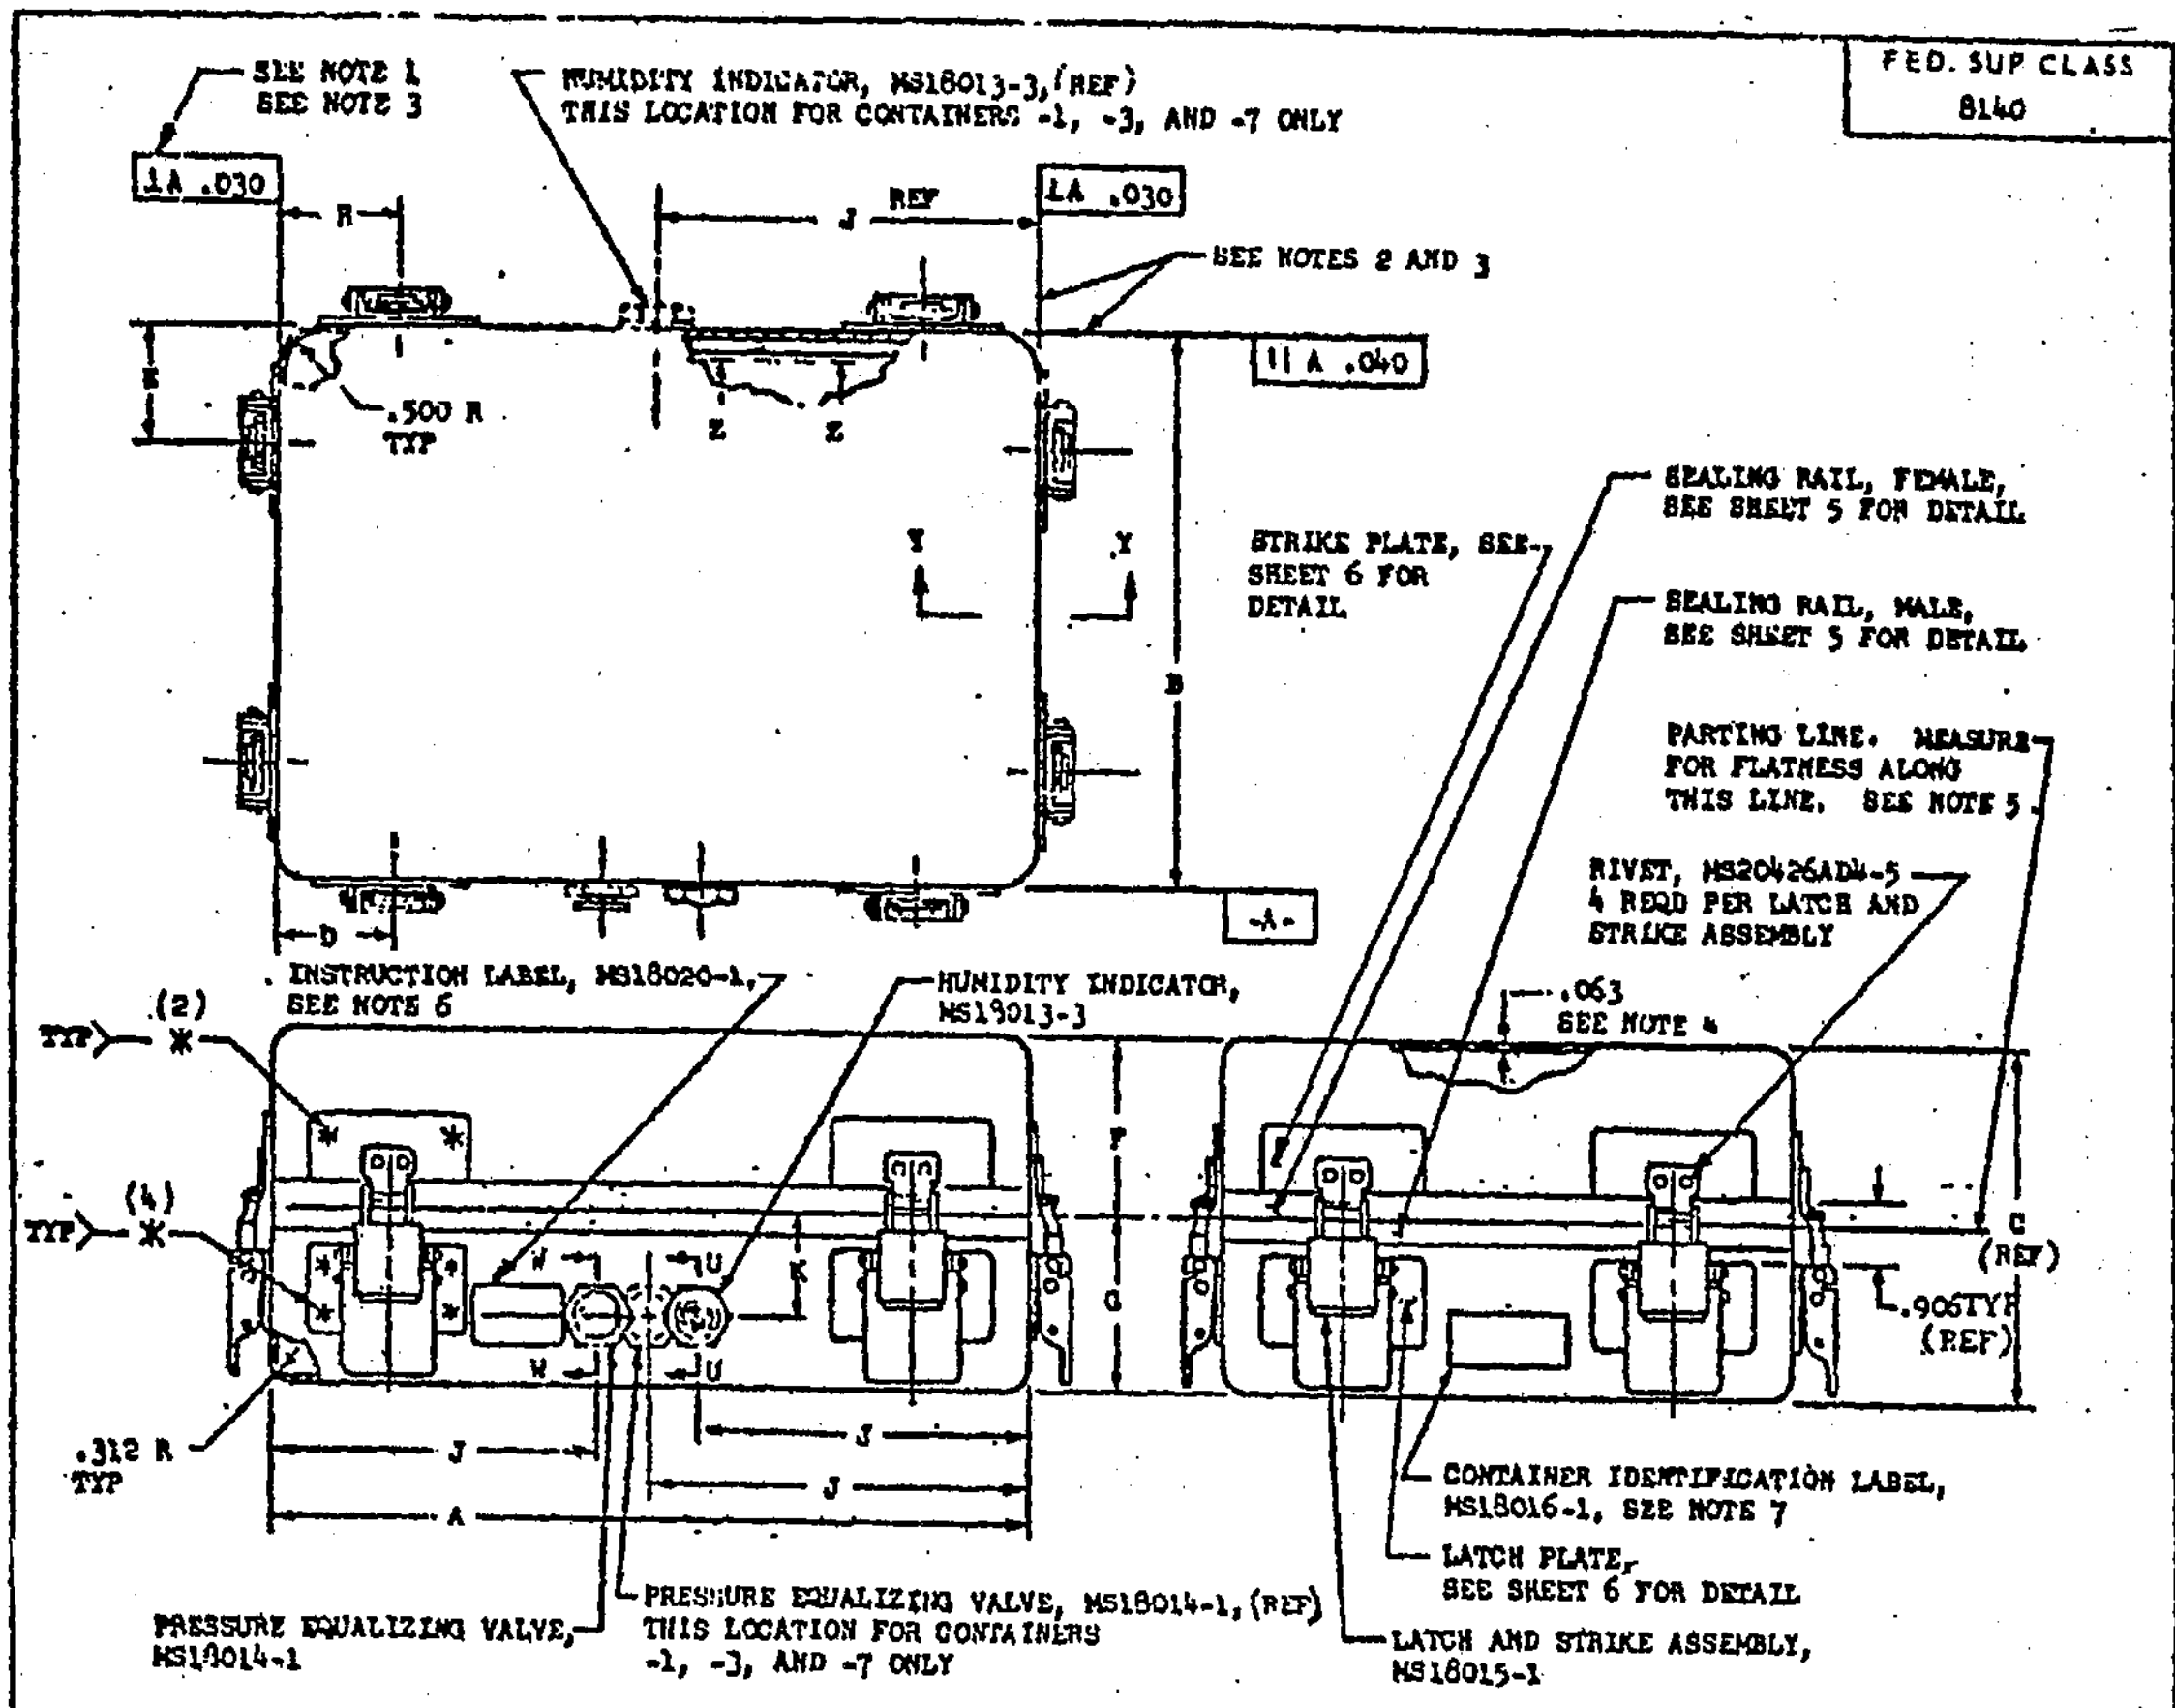

SEE NOTE 1
SEE NOTE 3
HUMIDITY INDICATOR, MS18013-3, (REF)
THIS LOCATION FOR CONTAINERS -1, -3, AND -7 ONLY
⊥A .030
R
J
REF
⊥A .030
SEE NOTES 2 AND 3
∥ A .040
E
.500 R
TYP
Z
Z
Y
Y
B
STRIKE PLATE, SEE SHEET 6 FOR DETAIL
SEALING RAIL, FEMALE, SEE SHEET 5 FOR DETAIL
SEALING RAIL, MALE, SEE SHEET 5 FOR DETAIL
PARTING LINE. MEASURE FOR FLATNESS ALONG THIS LINE. SEE NOTE 5
RIVET, MS20426AD4-5
4 REQD PER LATCH AND STRIKE ASSEMBLY
D
-A-
INSTRUCTION LABEL, MS18020-1, SEE NOTE 6
HUMIDITY INDICATOR, MS19013-3
.063
SEE NOTE 4
(2)
TYP
(4)
TYP
F
G
W
W
U
U
K
C
(REF)
.906TYP
(REF)
.312 R
TYP
J
J
J
A
CONTAINER IDENTIFICATION LABEL, MS18016-1, SEE NOTE 7
LATCH PLATE, SEE SHEET 6 FOR DETAIL
LATCH AND STRIKE ASSEMBLY, MS18015-1
PRESSURE EQUALIZING VALVE, MS18014-1
PRESSURE EQUALIZING VALVE, MS18014-1, (REF)
THIS LOCATION FOR CONTAINERS -1, -3, AND -7 ONLY

CONTAINERS -1 THRU -7 (.063 THICK, WITHOUT HANDLES)

DIMENSIONAL DATA FOR CONTAINERS -1 THRU -7

MS PART NO.	LENGTH A	WIDTH B	DEPTH C (REF)	D ±.062	E ±.062	F	G	H ±.062	J ±.062	K	NO. OF LATCHES			SHIPPING CONDITION DWG (REF) (WHEN ITEM IS ENCLOSED)
											EACH SIDE	EACH END	TOTAL	
MS18026-1	6.375	5.250	4.375	1.625	---	2.125	2.250	1.625	3.187	1.420	2	0	4	MS18011-1
MS18026-2	9.750	5.250	3.750	1.687	---	1.500	2.250	1.687	4.250	1.420	2	0	4	MS18011-2
MS18026-3	7.375	6.250	4.062	1.687	---	1.812	2.250	1.687	3.687	1.420	2	0	4	MS18011-3
MS18026-4	8.375	6.875	5.250	1.687	1.687	2.625	2.625	1.687	3.562	1.593	2	2	8	MS18011-4
MS18026-5	9.625	6.000	5.875	1.687	---	2.937	2.937	1.687	4.187	1.593	2	0	4	MS18011-5
MS18026-6	9.625	7.125	4.937	1.687	1.687	2.468	2.468	1.687	4.187	1.593	2	2	8	MS18011-6
MS18026-7	8.250	7.125	6.812	1.687	1.687	3.406	3.406	1.687	4.125	1.593	2	2	8	MS18011-7

Ⓐ ENTIRE STANDARD REVISED

APPROVED 23 Jan 63 REVISED Ⓐ 24 December 1964

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy, and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

P.A. NAVY-WP Other Cust.	TITLE CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-21525(Wep)	SUPERSEDES: SEE NOTE 14 FOR SUPERSEDURE	SHEET 1 OF 6

672-1 (Limited coordination)

FED. SUP CLASS
8140

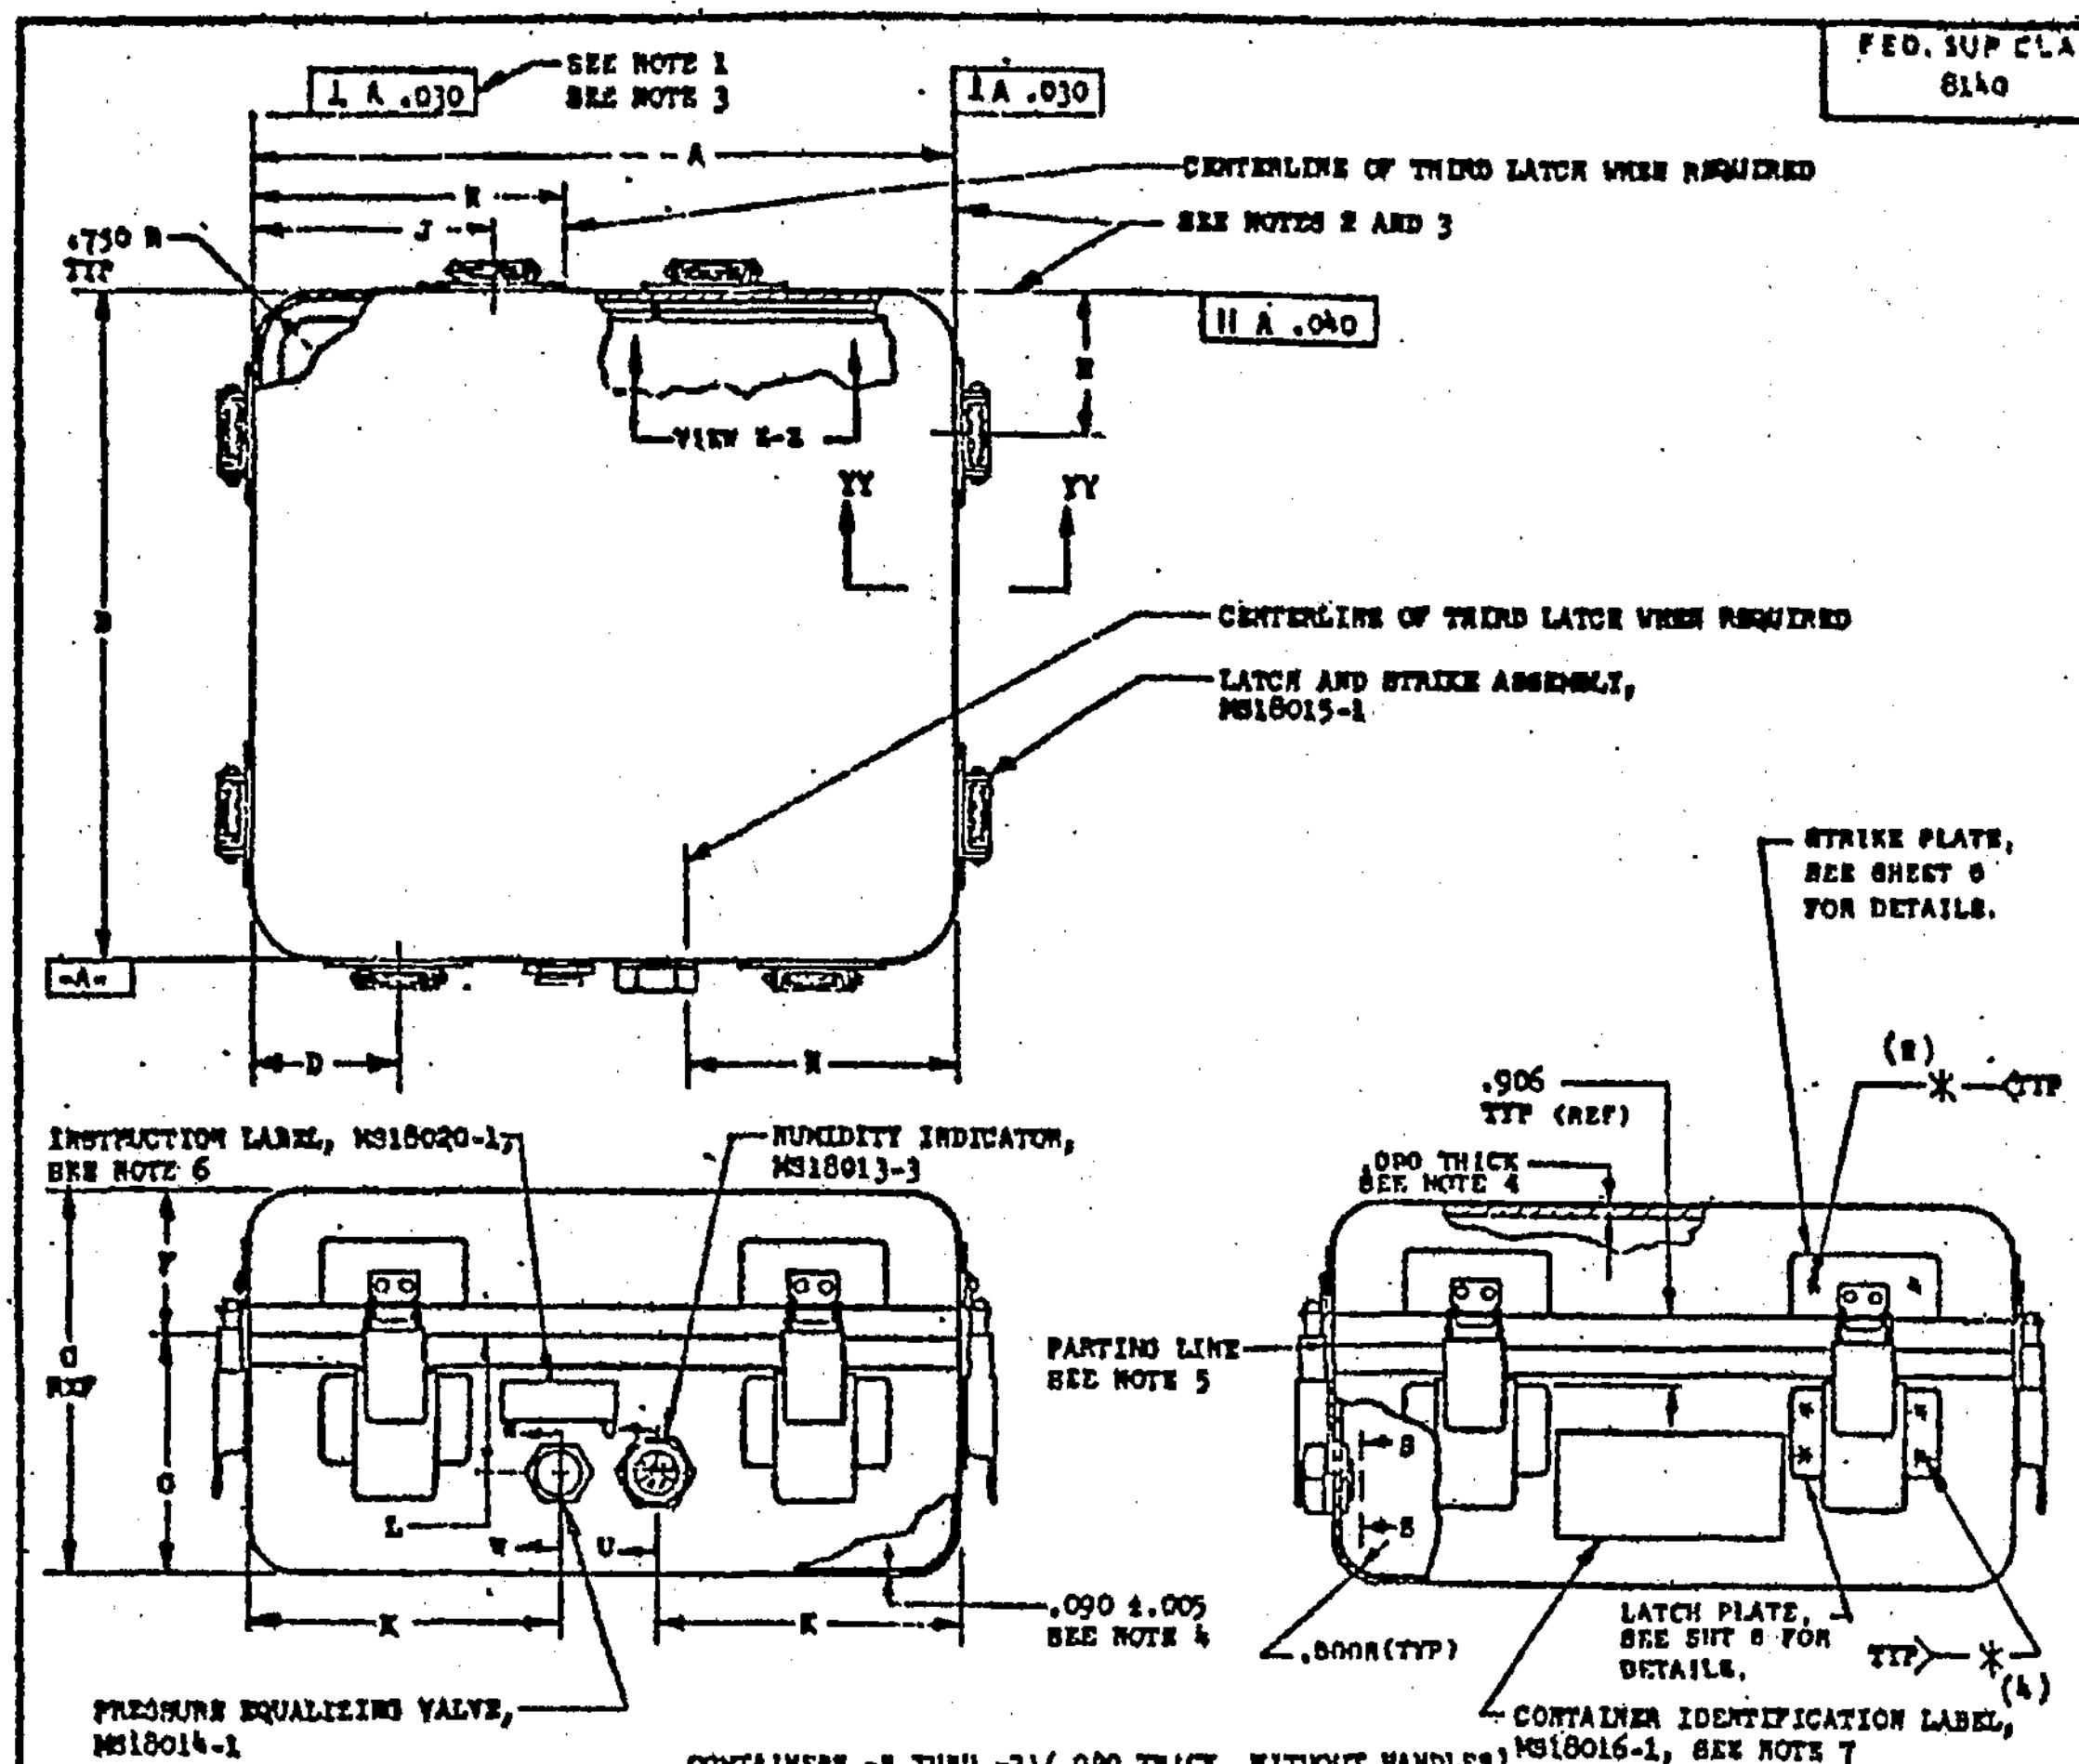
⊥ A .030
SEE NOTE 1
SEE NOTE 3
⊥ A .030
A
K
J
.750 R TYP
CENTERLINE OF THIRD LATCH WHEN REQUIRED
SEE NOTES 2 AND 3
∥ A .040
E
VIEW Z-Z
YY
YY
B
CENTERLINE OF THIRD LATCH WHEN REQUIRED
LATCH AND STRIKE ASSEMBLY, MS18015-1
-A-
D
H
INSTRUCTION LABEL, MS18020-1, SEE NOTE 6
HUMIDITY INDICATOR, MS18013-3
F
G REF
G
L
W
U
K
K
.090 ±.005 SEE NOTE 4
PRESSURE EQUALIZING VALVE, MS18014-1
STRIKE PLATE, SEE SHEET 6 FOR DETAILS.
(2)
TYP
.906 TYP (REF)
.090 THICK SEE NOTE 4
PARTING LINE SEE NOTE 5
S
S
.800R (TYP)
LATCH PLATE, SEE SHT 6 FOR DETAILS.
TYP
(4)
CONTAINER IDENTIFICATION LABEL, MS18016-1, SEE NOTE 7

CONTAINERS -8 THRU -21 (.090 THICK, WITHOUT HANDLES)

DIMENSIONAL DATA FOR CONTAINERS -8 THROUGH -21

MS PART NO.	LENGTH A	WIDTH B	DEPTH C (REF)	D ±.062	E ±.062	F	G	H ±.062	J ±.062	K ±.062	L	NO. OF LATCHES			SHIPPING CONDITION DWG (REF) (WHEN ITEM IS ENCLOSED)
												EACH SIDE	EACH END	TOTAL	
MS18026-8	11.125	6.125	4.187	2.000	---	1.750	2.437	---	3.375	4.937	1.343	2	0	4	MS18011-8
MS18026-9	12.250	8.500	4.000	2.000	2.000	1.750	2.250	---	3.375	5.500	1.171	2	2	8	MS18011-9
MS18026-10	11.750	9.375	4.000	2.000	2.000	1.750	2.250	---	3.375	5.250	1.171	2	2	8	MS18011-10
MS18026-11	11.125	6.750	6.562	2.000	---	3.281	3.281	---	3.375	4.937	1.625	2	0	4	MS18011-11
MS18026-12	12.625	8.500	5.187	2.000	2.000	2.593	2.593	---	3.375	5.687	1.500	2	2	8	MS18011-12
MS18026-13	11.500	9.750	5.937	2.000	2.000	2.968	2.968	---	3.375	5.125	1.718	2	2	8	MS18011-13
MS18026-14	9.125	8.750	8.437	2.000	2.000	4.218	4.218	---	2.000	3.937	1.875	2	2	8	MS18011-14
MS18026-15	13.750	8.750	6.687	2.000	2.000	3.343	3.343	---	3.375	6.250	1.687	2	2	8	MS18011-15
MS18026-16	22.750	6.625	5.437	2.000	---	2.718	2.718	10.687	3.375	6.937	1.625	3	0	6	MS18011-16
MS18026-17	13.125	8.875	8.250	2.000	2.000	4.125	4.125	---	3.375	5.937	1.875	2	2	8	MS18011-17
MS18026-18	12.875	12.375	7.062	2.000	2.250	3.531	3.531	---	3.375	5.812	1.750	2	2	8	MS18011-18
MS18026-19	11.750	10.250	9.687	2.000	2.250	4.843	4.843	---	3.375	5.250	2.312	2	2	8	MS18011-19
MS18026-20	19.500	8.500	7.187	2.000	2.000	3.593	3.593	9.062	3.375	6.125	2.250	3	2	10	MS18011-20
MS18026-21	16.000	10.750	6.687	2.000	2.250	4.343	4.343	7.312	3.375	5.250	2.062	3	2	10	MS18011-21

APPROVED 23 Jan 53 REVISED (A) FOR CHANGES, SEE SHEET 1 THRU 6

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

P.A. NAVY-WP Other Cust	TITLE . CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-23525(Wep)	SUPERSEDES: SEE NOTE 14 FOR SUPERSEDURE	SHEET 2 OF

(limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z

FED. SUP CLASS
8140

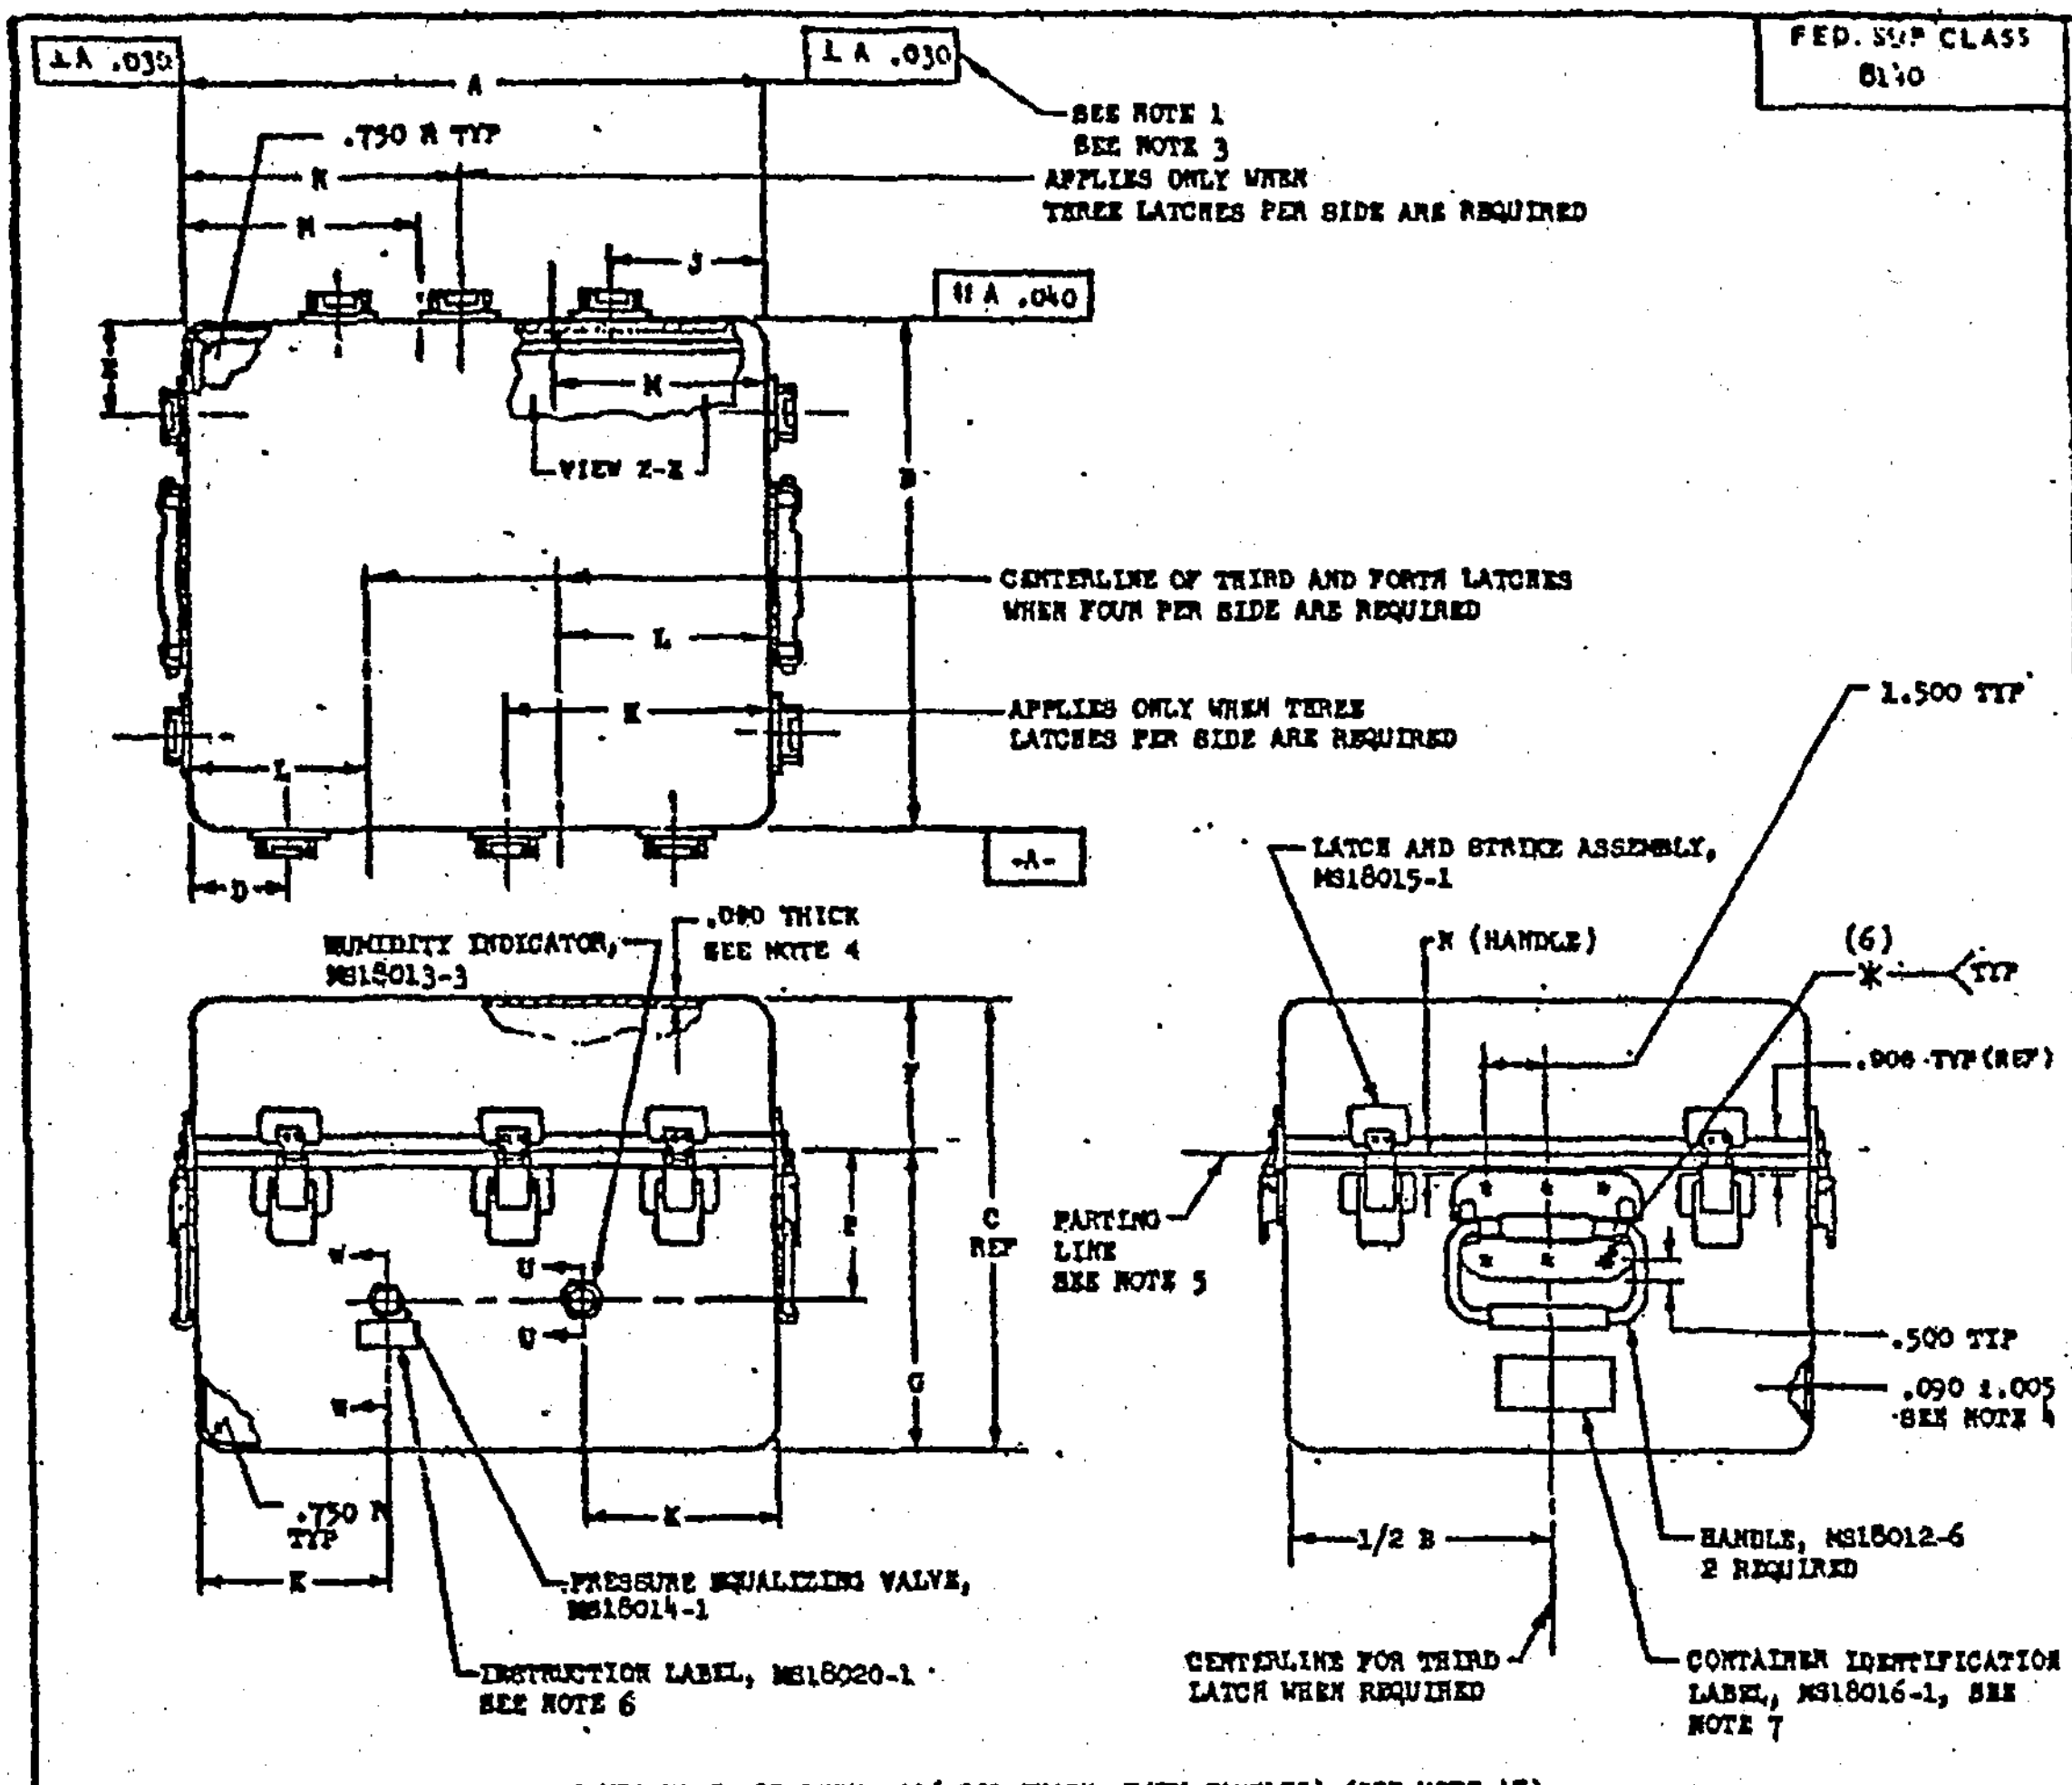
⊥ A .030
A
⊥ A .030
SEE NOTE 1
SEE NOTE 3
.750 R TYP
K
APPLIES ONLY WHEN THREE LATCHES PER SIDE ARE REQUIRED
M
J
// A .040
N
M
VIEW Z-Z
B
CENTERLINE OF THIRD AND FORTH LATCHES WHEN FOUR PER SIDE ARE REQUIRED
L
K
APPLIES ONLY WHEN THREE LATCHES PER SIDE ARE REQUIRED
L
-A-
D
HUMIDITY INDICATOR, MS18013-3
.090 THICK SEE NOTE 4
F
E
C REF
W
U
U
W
G
.750 R TYP
K
K
PRESSURE EQUALIZING VALVE, MS18014-1
INSTRUCTION LABEL, MS18020-1 SEE NOTE 6
LATCH AND STRIKE ASSEMBLY, MS18015-1
N (HANDLE)
1.500 TYP
(6)
TYP
.006 TYP (REF)
PARTING LINE SEE NOTE 5
.500 TYP
.090 ±.005 SEE NOTE 4
1/2 B
HANDLE, MS18012-6 2 REQUIRED
CENTERLINE FOR THIRD LATCH WHEN REQUIRED
CONTAINER IDENTIFICATION LABEL, MS18016-1, SEE NOTE 7

CONTAINERS -22 THRU -28 (.090 THICK, WITH HANDLES) (SEE NOTE 17)

DIMENSIONAL DATA FOR CONTAINERS -22 THRU -28

MS PART NO.	LENGTH A	WIDTH B	DEPTH C (REF)	D ±.062	E ±.062	F	G	H ±.062	J ±.062	K ±.062	L ±.062	M ±.062	N ±.062	P ±.062	NO. OF LATCHES			SHIPPING CONDITION DWG (REF) (WHEN ITEM IS ENCLOSED)
															EACH SIDE	EACH END	TOTAL	
MS18026-22	15.000	13.625	12.000	2.250	2.500	4.000	8.000	6.812	3.625	6.875	---	---	1.250	4.000	3	2	10	MS18011-22
MS18026-23	23.625	14.500	9.750	3.000	2.750	2.750	7.000	---	4.375	11.187	7.375	8.750	2.125	3.500	4	3	14	MS18011-23
MS18026-24	22.500	13.000	11.500	2.625	2.625	3.500	8.000	---	4.000	10.625	7.875	9.250	2.125	4.000	4	3	14	MS18011-24
MS18026-25	18.500	15.000	12.000	2.750	2.750	4.000	8.000	8.562	4.125	8.625	---	---	2.125	4.000	3	3	12	MS18011-25
MS18026-26	26.000	14.750	11.750	2.750	2.750	3.250	8.500	---	4.125	12.375	8.500	9.875	2.125	4.500	4	3	14	MS18011-26
MS18026-27	22.875	17.250	11.625	2.750	2.750	3.125	8.500	---	4.125	10.812	7.125	8.500	2.125	4.500	4	3	14	MS18011-27
MS18026-28	22.000	19.000	16.000	2.500	3.000	7.500	8.500	---	3.875	10.375	7.125	8.500	2.125	5.000	4	3.	14	MS18011-28

APPROVED 23 Jan 63 REVISED (A) FOR CHANGES, SEE SHEET 1 THRU 6

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy, and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

P.A. NAVY-WP Other Cust.	TITLE CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-23925(Wep)	SUPERSEDES: SEE NOTE 14 FOR SUPERSEDURE	SHEET 3 OF

DD FORM 672-1 (Limited coordination)

FED. SUP CLASS
8140

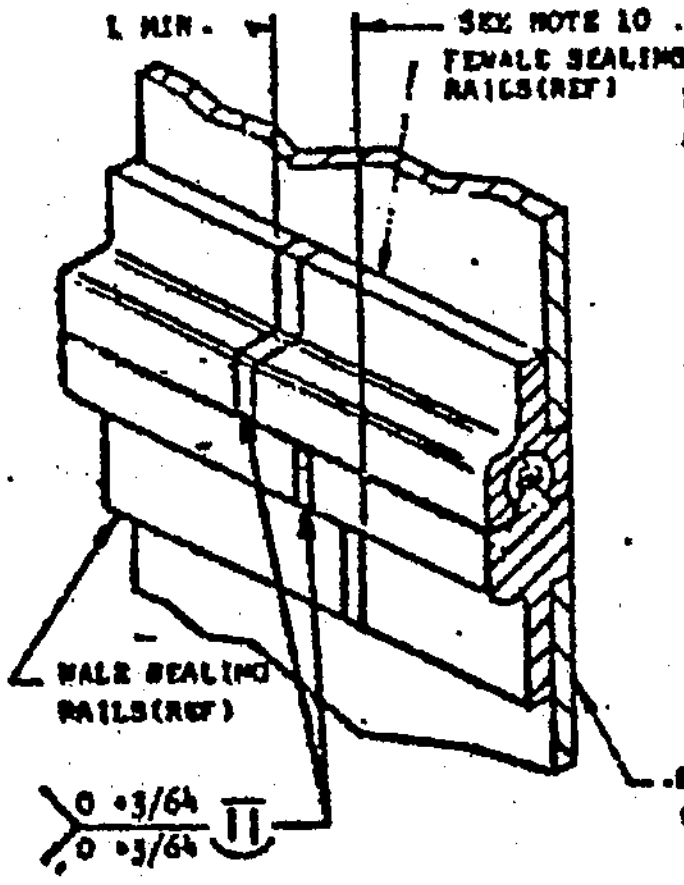

VIEW Z-Z

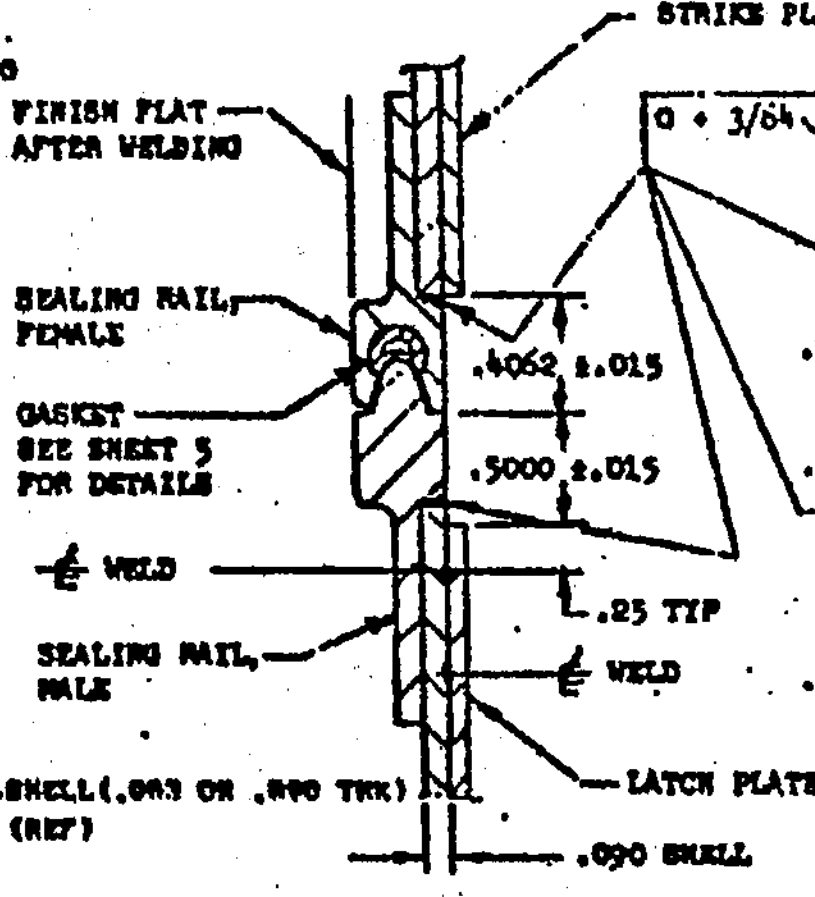

SECTION Y-Y
TYPICAL FOR CONTAINERS -8 TO -28

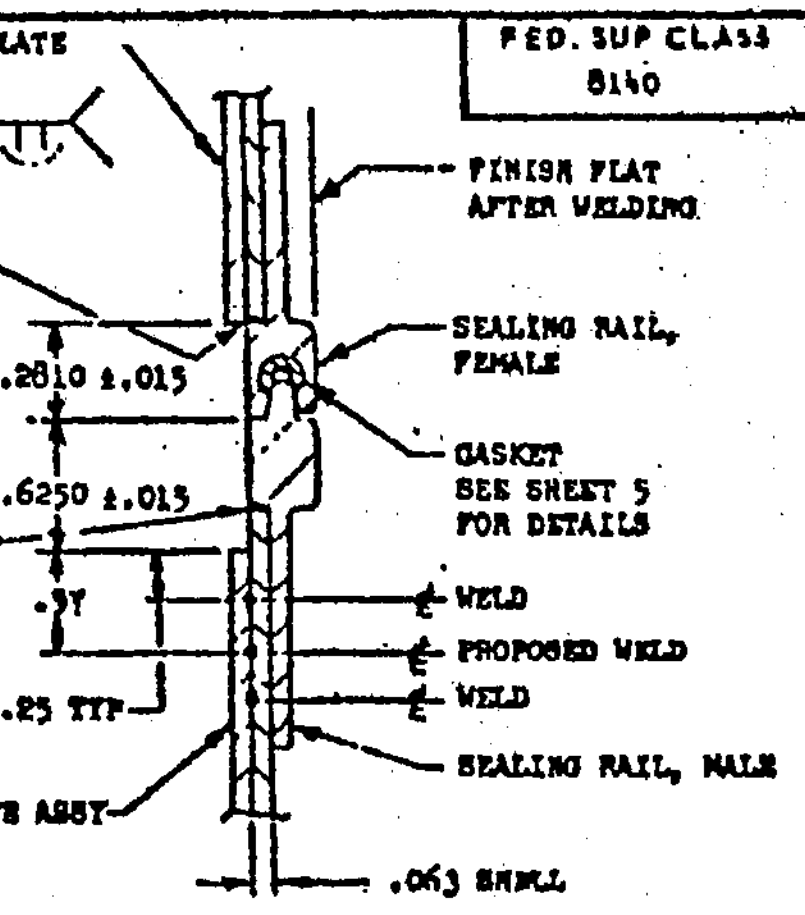

SECTION YY-YY
TYPICAL FOR CONTAINERS -1 TO -7

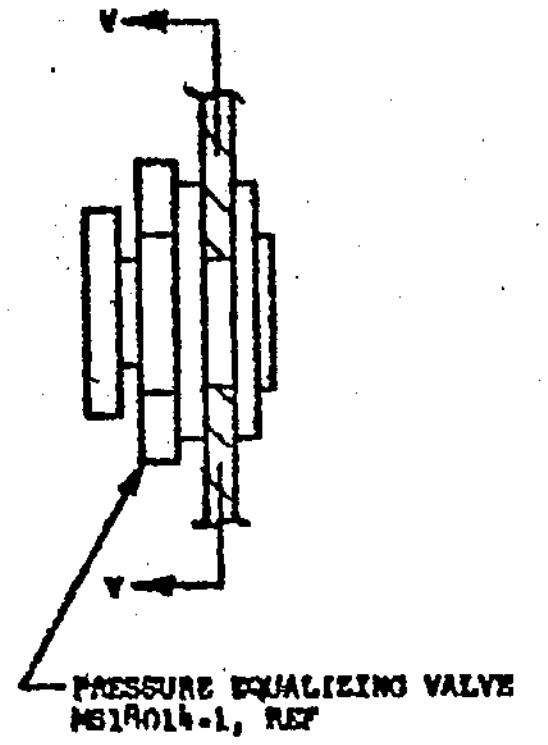

SECTION W-W



SECTION V-V

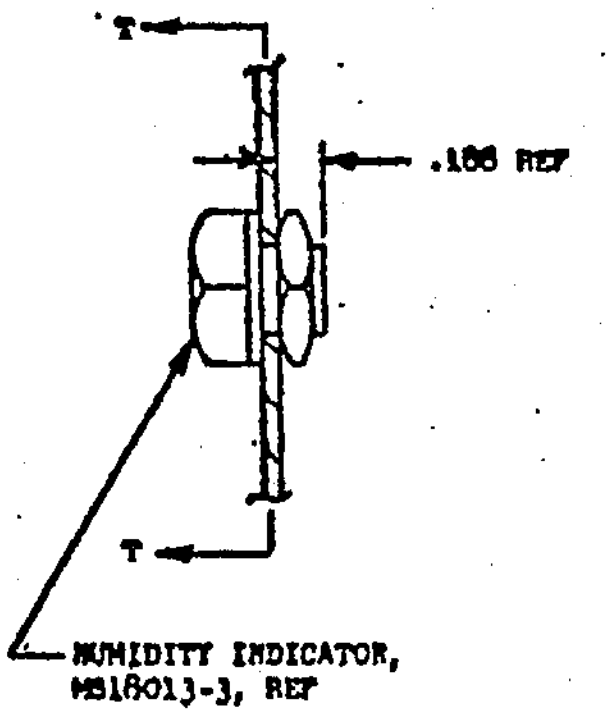

SECTION U-U



SECTION T-T

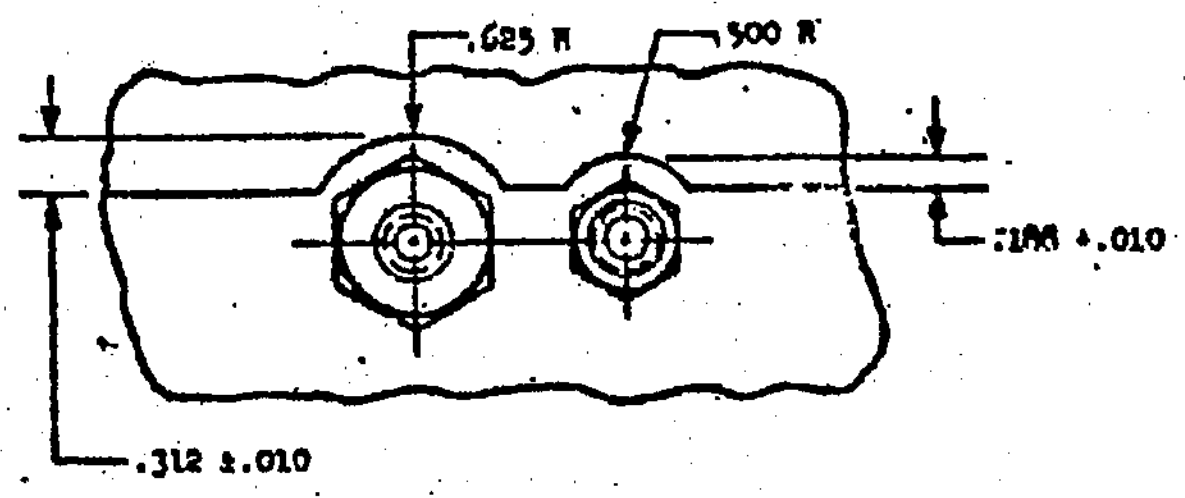

VIEW S-S
(TYPICAL FOR CONTAINER -8 ONLY)

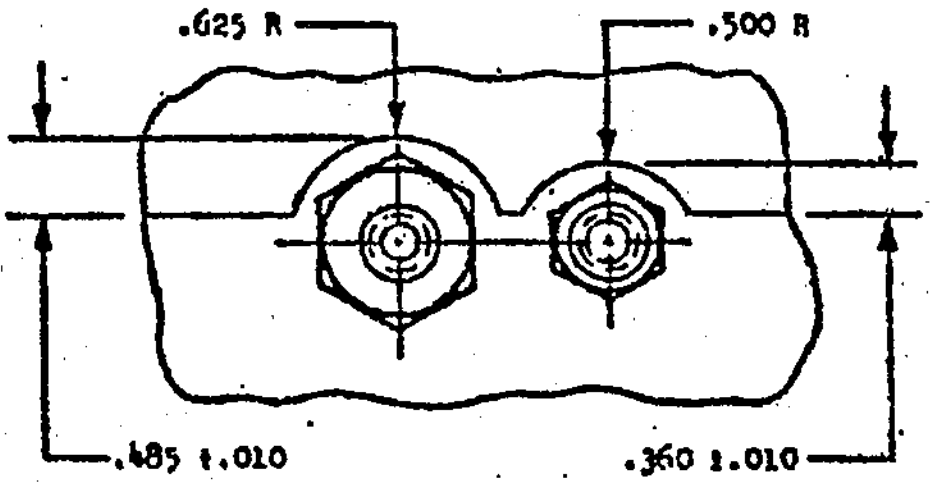

VIEW S-S
(TYPICAL FOR CONTAINERS -9 AND -10 ONLY)

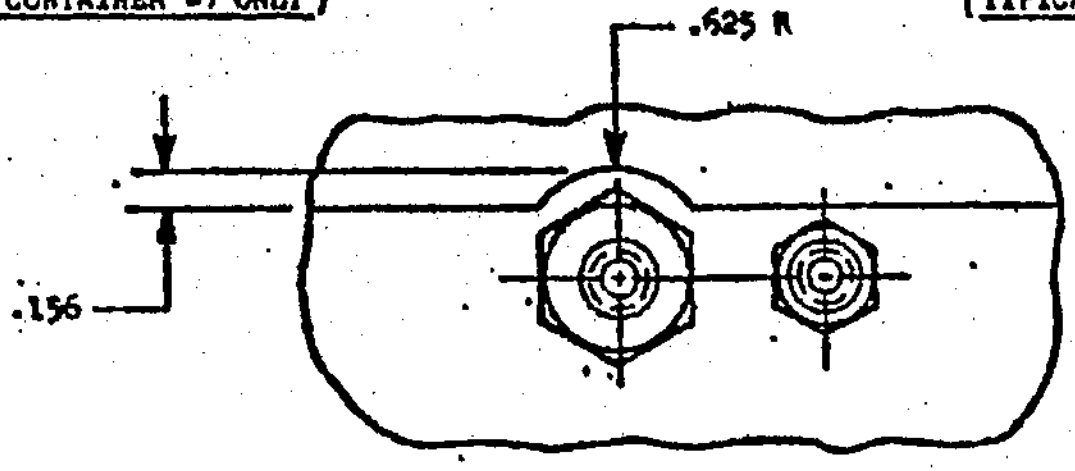

VIEW S-S
(TYPICAL FOR CONTAINER -12 ONLY)

VIEWS S-S

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

APPROVED 22 Jun 62 REVISED (4) FOR CHANGES, SEE SHEET 1 THRU 8

P.A. NAVY-WP Other Cust	TITLE CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-21529 (WEP)	SUPERSEDES SEE NOTE 14 FOR SUPERSEDURE	SHEET 4 OF

FED. SUP CLASS
8140

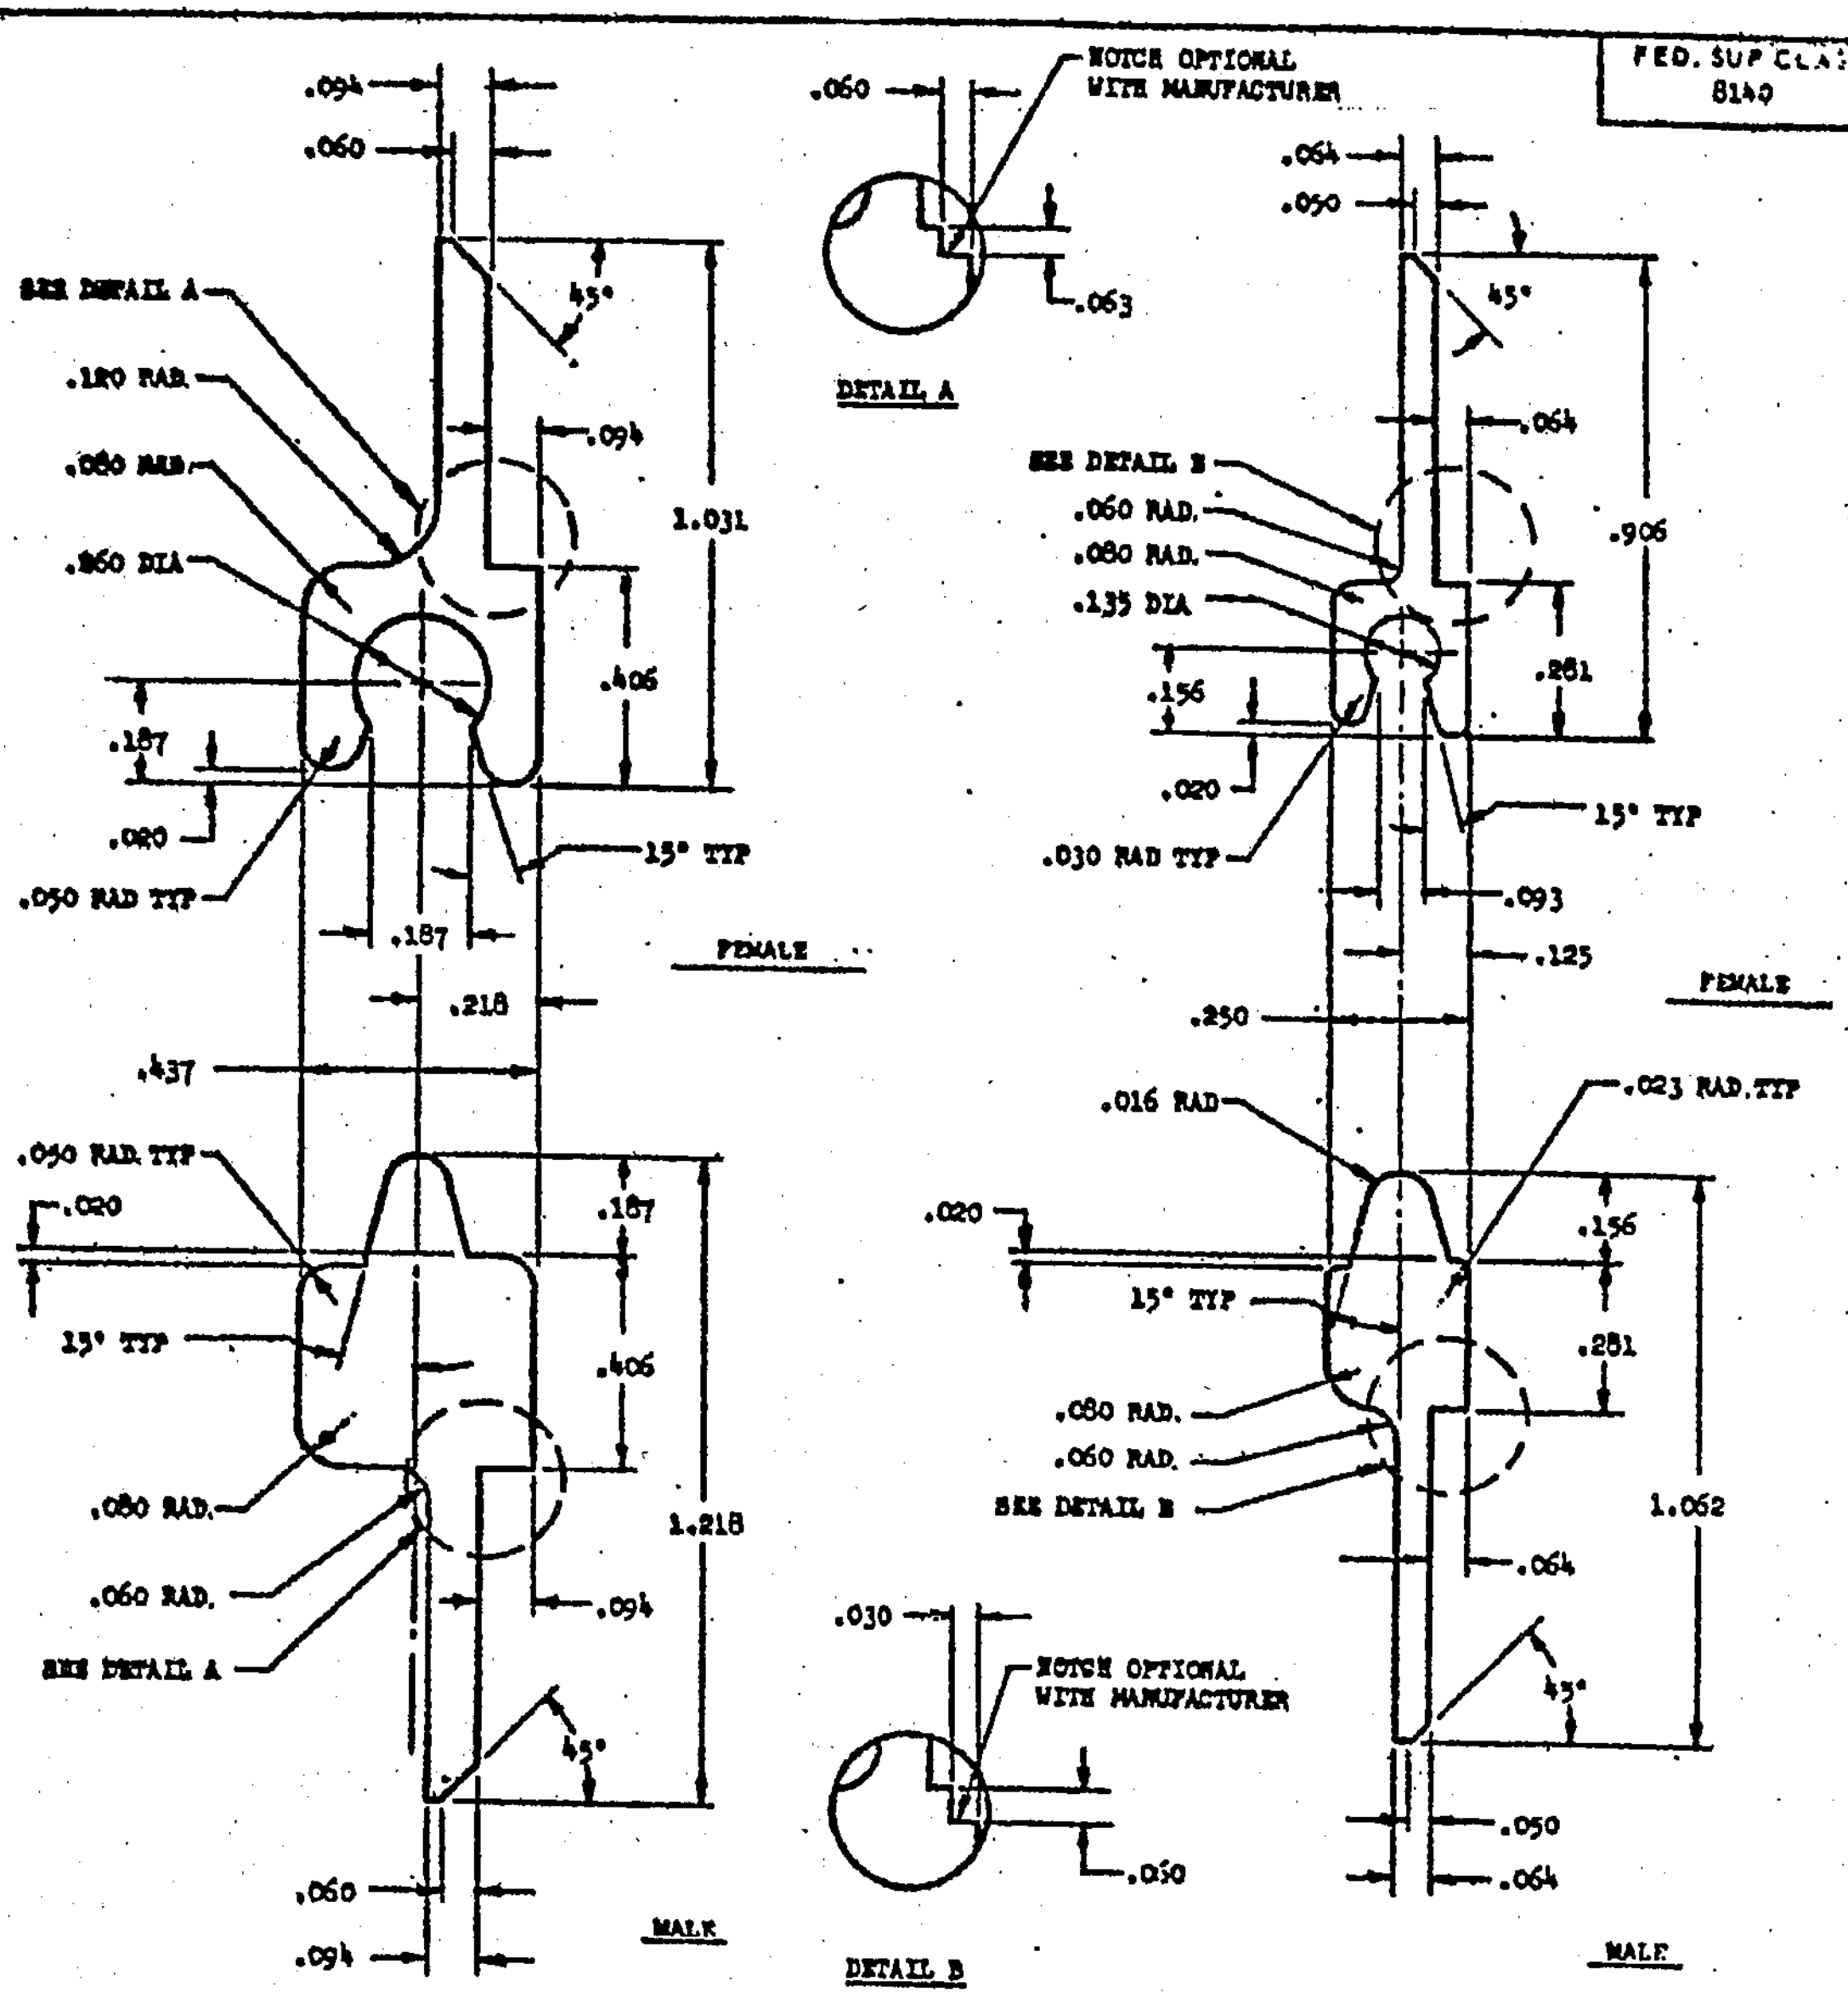

SEE NOTE 11 FOR LENGTH.
SEE NOTE 12 FOR TOLERANCES.

SEALING RAILS FOR .090 THICK CONTAINERS
(APPLICABLE TO -8 THRU -28)

SEE NOTE 11 FOR LENGTH.
SEE NOTE 12 FOR TOLERANCES.

SEALING RAILS FOR .063 THICK CONTAINERS
(APPLICABLE TO -1 THRU -7)

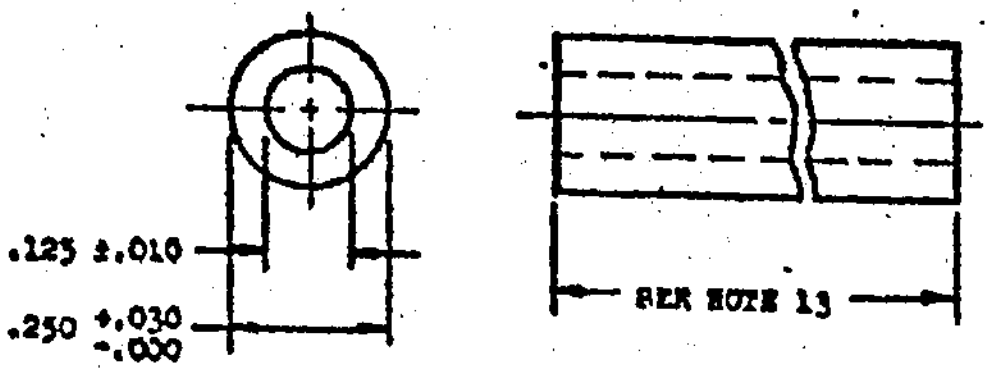

GASKET FOR .090 THICK CONTAINERS

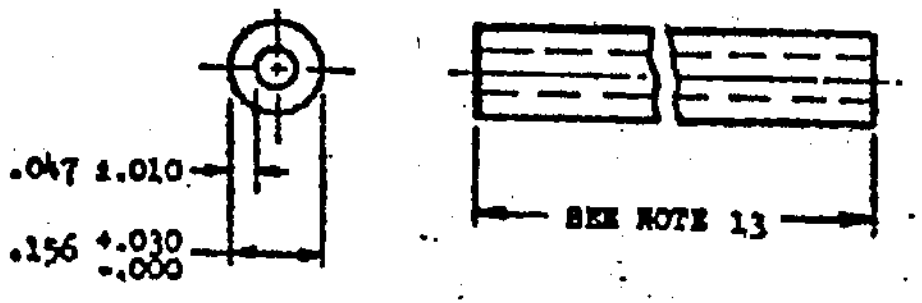

SEE NOTE 13
(BOTH GASKETS)

GASKET FOR .063 THICK CONTAINERS

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

APPROVED 23 Jan 63 REVISED A FOR CHANGES, SEE SHEET 1 THRU 6

P.A. NAVY-WP Other Cust	TITLE CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-23525(Wep)	SUPERSEDES: SEE NOTE 14 FOR SUPERSEDURE	SHEET 5 OF

DD Form 672-1 (Limited coordination)

FED. SUP CLASS
8140

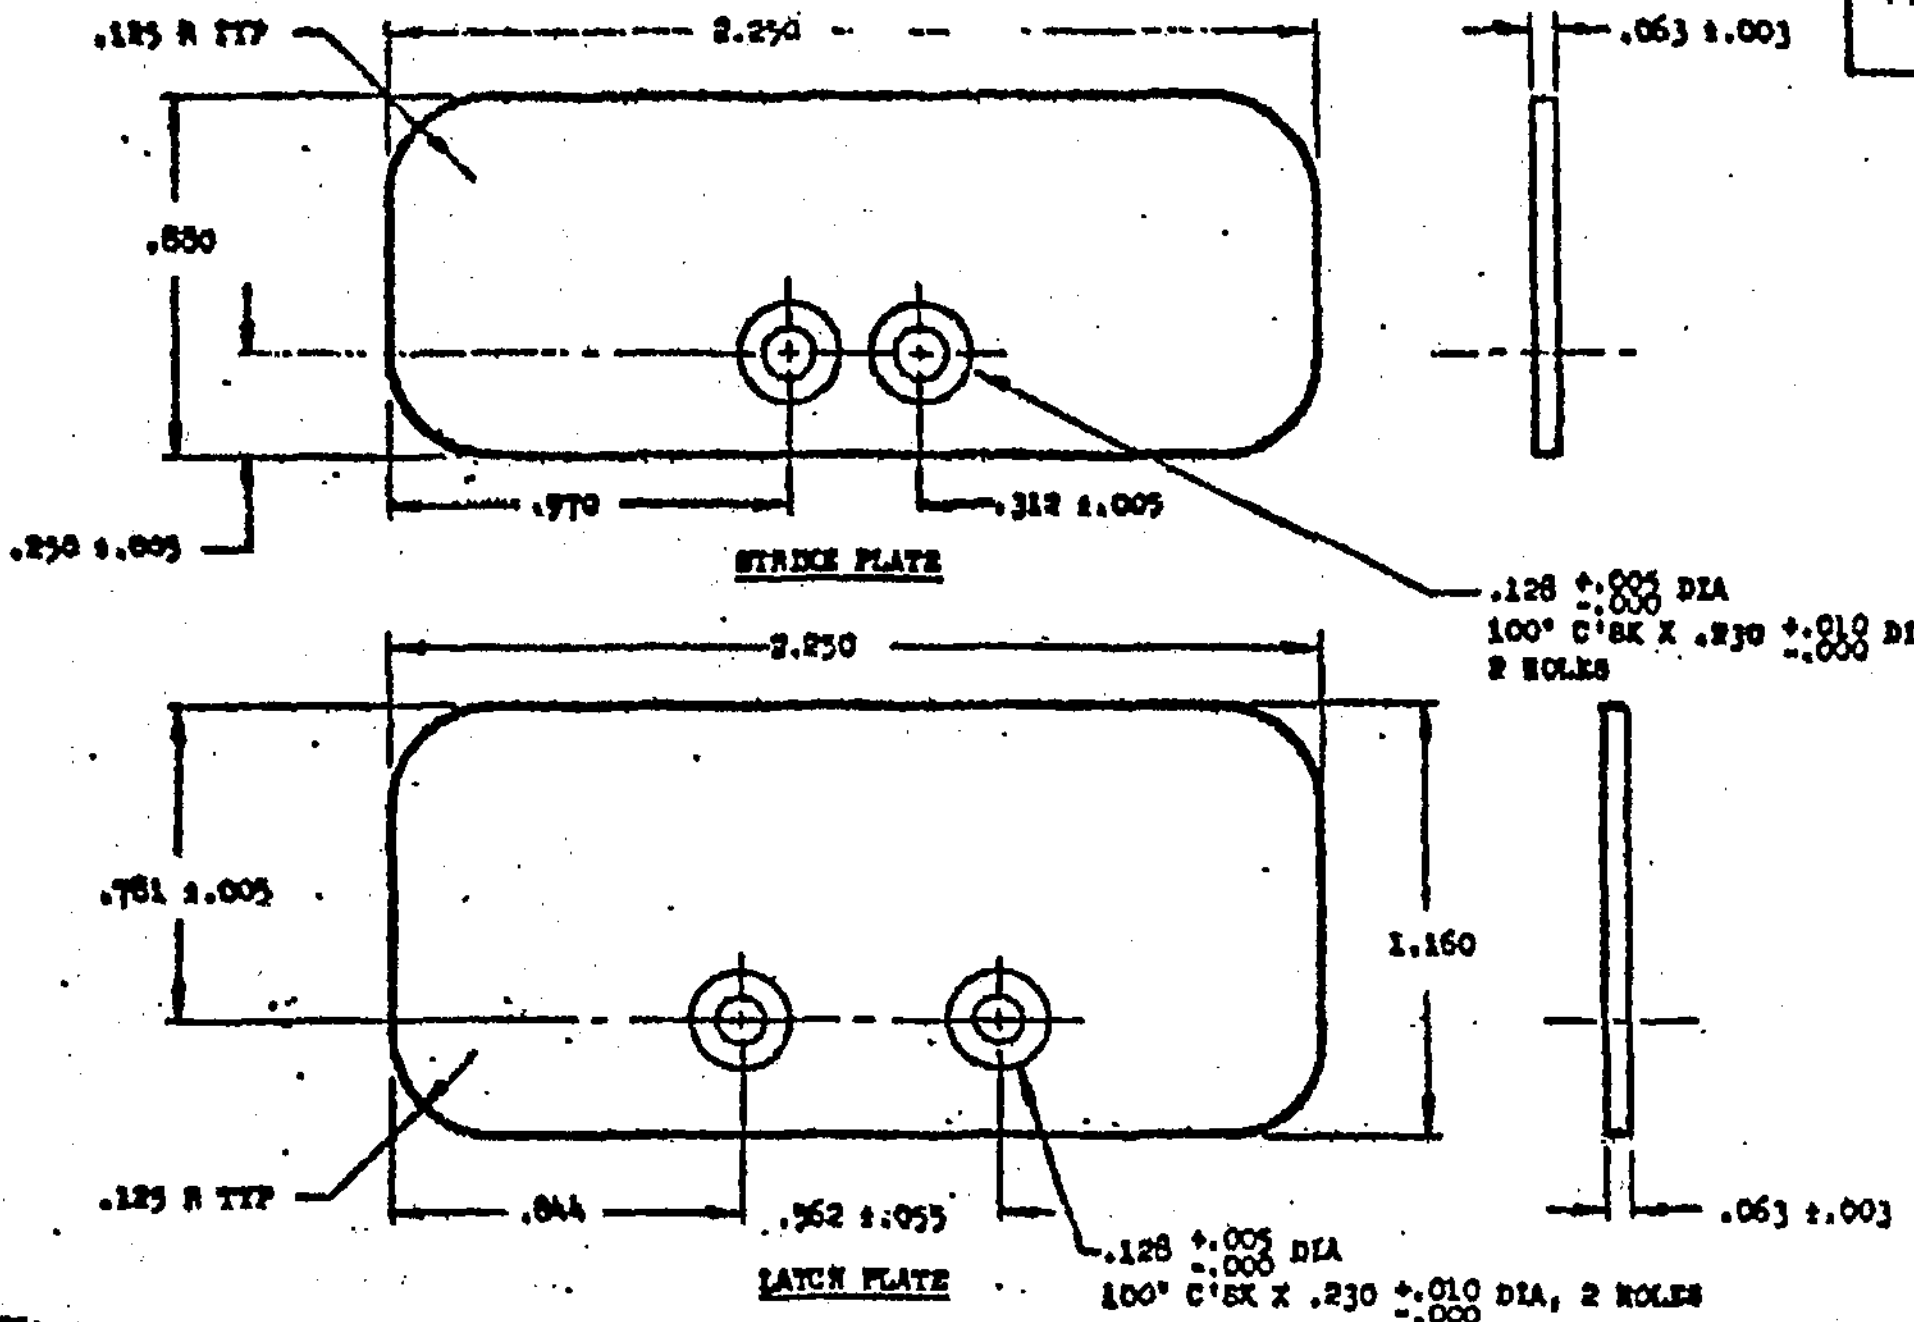

NOTES:

1. GEOMETRIC CHARACTERISTICS SHALL BE INTERPRETED IN ACCORDANCE WITH MIL-STD-8.
2. SIDES AND ENDS OF CONTAINERS SHALL BE STRAIGHT WITHIN .030 INCH TOTAL INDICATOR READING (TIR) IN ANY 6 INCHES OF LENGTH AND .040 INCH TIR OVER ENTIRE LENGTH OF ANY SIDE OR END WHEN MEASURED ALONG OUTSIDE FLAT SURFACE OF SEALING RAIL.
3. MEASUREMENT FOR PARALLELISM AND PERPENDICULARITY OF SIDES SHALL BE MADE ALONG OUTSIDE FLAT SURFACES OF SEALING RAILS, 3 INCHES FROM THE LINE OF INTERSECTION OF ANY SIDE AND ANY END, INWARD, ALONG SIDES OF THE EXTRUSIONS.
4. TOLERANCES ON .063 AND .090 DIMENSIONS FOR MATERIAL THICKNESS ARE MILL TOLERANCES AND APPLY TO SHEET STOCK BEFORE FORMING.
5. SEALING RAILS SHALL BE FLAT WITHIN .020 INCH TIR IN ANY 6 INCHES OF LENGTH AND .040 INCH TIR OVER ENTIRE LENGTH OF ANY SIDE OR END.
6. LOCATION OF INSTRUCTION LABEL SHOWN NOT MANDATORY. LOCATE ADJACENT TO PRESSURE EQUALIZER.
7. THE CONTAINER IDENTIFICATION LABEL SHALL BE LOCATED ON THE LOWER HALF OF THE CONTAINER, ON ANY SIDE, WHERE SPACE PERMITS.
8. VARIATION IN CORNER RADII ON ANY ONE CONTAINER SIZE SHALL NOT EXCEED .030 INCH.
9. VARIATION IN LENGTH OR WIDTH OF MATING HALVES OF CONTAINERS SHALL NOT EXCEED .020 INCH.
10. WELDING SYMBOLS SHALL BE INTERPRETED IN ACCORDANCE WITH JAN-STD-19. WELDED JOINTS AT ENDS OF SEALING RAILS SHALL BE LOCATED ON A STRAIGHT SIDE OR END, BETWEEN LATCHES. THEY SHALL BE STAGGERED SO THAT THE JOINT IN THE UPPER (FEMALE) RAIL DOES NOT COINCIDE WITH THE JOINT IN THE LOWER (MALE) RAIL. AT THE CONTRACTOR'S ELECTION, OTHER METHODS MAY BE UTILIZED FOR BONDING THE EXTRUSION TO THE CASE OR JOINING THE SEALING RAILS IN LIEU OF THE FUSION METHOD SPECIFIED IN THE PROCUREMENT DOCUMENT. SUCH ELECTION SHALL BE MADE AT THE CONTRACTOR'S RISK AND SHALL NOT IMPAIR IN ANY WAY HIS OBLIGATION TO MEET ALL PERFORMANCE STANDARDS AND OTHER REQUIREMENTS CALLED FOR BY ANY CONTRACT INCORPORATING THIS STANDARD. THE CONTRACTOR MAY ELECT TO USE A COMBINATION OF SPOT WELDS AND ORGANIC SEALANTS PROVIDED THE SPOT WELDS ARE SPACED A MINIMUM OF 2 INCHES APART ON CENTERS AND THAT THE CONTAINERS, SO CONSTRUCTED, MEET THE PERFORMANCE REQUIREMENTS OF THE PROCUREMENT DOCUMENT. THE GOVERNMENT DOES NOT WARRANT ANY METHOD OTHER THAN THE PRESCRIBED FUSION WELDING METHOD AND EXPRESSLY DISCLAIMS ALL LIABILITY OR WARRANTY FOR ANY OTHER METHOD ELECTED BY THE CONTRACTOR AS SUITABLE FOR USE IN THE PERFORMANCE OF HIS CONTRACT.
11. THE LENGTH OF ANY INDIVIDUAL SEALING RAIL SHALL BE AS REQUIRED FOR ITS APPLICABLE SHELL LESS .046 INCH MAXIMUM AS A WELDING ALLOWANCE. SEE VIEW Z-Z.
12. TOLERANCES ON SEALING RAIL EXTRUSIONS SHALL BE IN ACCORDANCE WITH FEDERAL STANDARD 245.
13. FOR LENGTH OF GASKET SEE PROCUREMENT SPECIFICATION. MATERIAL FOR GASKET: RUBBER CONFORMING TO SPECIFICATION MIL-R-3065, CODE NO. SC415A,C,F,Z (WHERE Z = 25 PERCENT MAXIMUM SET, 70 HOURS AT 212° F, METHOD B OF ASTM D395). SUGGESTED FORMULA AND CURING TIME IS AS FOLLOWS:

COMPOUNDING INGREDIENT	PARTS BY WEIGHT	COMPOUNDING INGREDIENT	PARTS BY WEIGHT
NEOPRENE TYPE WRT	100	THERMAX	20-25
NEOZONE D	1	ZINC OXIDE	5
MAGNESIUM OXIDE	4	PLASTICIZER SC	5-10
NA-22	0.75		

CURE 30 MINUTES AT 307° F.

14. SHEETS 1, 2, 3, AND 4 OF THIS STANDARD SUPERSEDE BUWEPS DRAWING NO. 2210448. SHEET 5 OF THIS STANDARD SUPERSEDES BUWEPS DRAWING NOS. 2241516, 2241517, 2241520, 2241521, 2249374, AND 2249375.
15. MATERIAL: SEE PROCUREMENT SPECIFICATION.
16. FINISH: SEE PROCUREMENT SPECIFICATION.
17. SHELLS FOR CONTAINERS -22 THROUGH -28 SHALL BE HEAT TREATED TO TEMPER T-6 AFTER FORMING AND PRIOR TO ASSEMBLY WITH SEALING RAILS. HEAT TREATMENT OF SHELLS FOR CONTAINERS -1 THROUGH -21 IS NOT REQUIRED.
18. BREAK ALL SHARP EDGES .022 INCH MAXIMUM.
19. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031.
20. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
21. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 23 Jan 63   REVISED (A)   FOR CHANGES, SEE SHEET 1 THRU 6

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy, and it is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

P.A: NAVY-WP Other Cust	TITLE CONTAINERS, REUSABLE, ALUMINUM, HAND PORTABLE	MILITARY STANDARD MS18026(WP)
PROCUREMENT SPECIFICATION MIL-C-23525(Wep)	SUPERSEDES: SEE NOTE 14 FOR SUPERSEDURE	SHEET 6 OF

DD FORM