
FED. SUP CLASS
4220

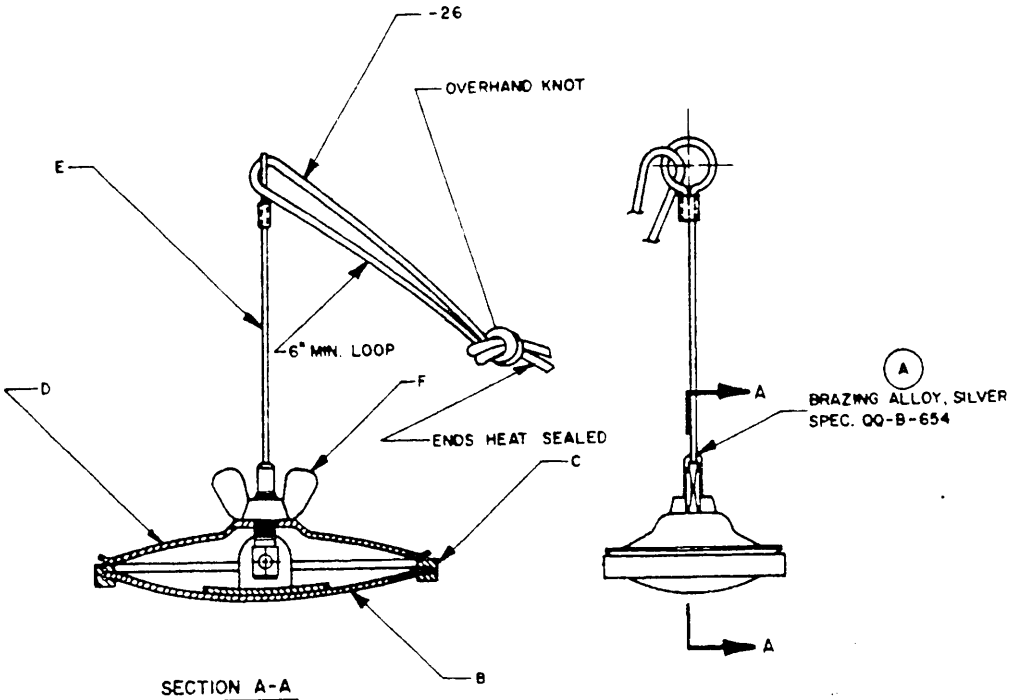

SECTION A-A

-1, -2, & -3 ASSEMBLY

DASH NO	B PART	C PART	D PART	E PART	F PART
-1	-23	-13	-4	-18	MS35425-39
-2	-24	-14	-5	-19	MS35425-39
-3	-25	-15	-6	-20	MS35425-42

MATERIAL: FOR -26 NYLON CORD $\frac{1}{8}$ INCH DIA 19 INCHES LONG
SPEC. MIL-C-5040

(A) FOR CHANGES SEE PAGES 1, 7, AND 8

APPROVED 8 APRIL 1968 REVISED (A) 29 AUG 75

This mili... standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities:


Review activities:
AIR FORCE-84


P.A. USAF - 82 Other Cust SH	TITLE PLUG ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STANDARD MS 27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 8

DD FORM 673-1 (Obsolete)


Source: https://assist.dla.mil -- Downloaded: 20260...
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4220

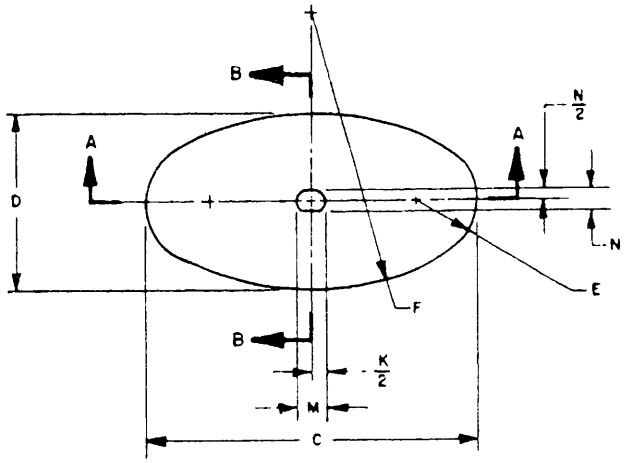



SECTION B-B

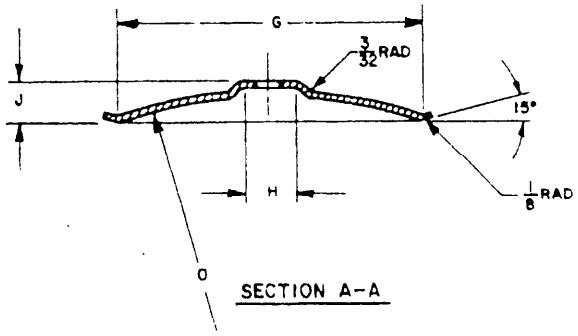

SECTION A-A

-4, -5, & -6 COVER

DASH NO	C DIM	D DIM	E RAD	F RAD	G DIM	H DIA	J DIM	K DIM	L RAD	M DIM +.005 -.000	N DIM +.005 -.000	O RAD
-4	3-1/4	1-3/4	5/8	2-3/4	3	1/2	13/32	1-1/2	1-5/32	.252	.182	4-17/32
-5	5-1/4	2-1/4	3/4	5-1/2	5	1/2	13/32	2	2-1/8	.252	.182	14-7/8
-6	7-3/4	3-1/2	1-3/16	7-7/8	7-1/2	3/4	17/32	3-1/4	3-3/4	.377	.292	21-1/4

MATERIAL: AL ALLOY, SPEC. QQ-A-250/8
FINISH: ANODIC COATING, SPEC. MIL-A-8625

NOTE:
1. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm \frac{1}{32}$

P.A. USAF-82	TITLE	MILITARY STAY D
Other Cust SH	PLUG, ASSEMBLY, (SEALING CLAMP) LIFE RAFT REPAIR	MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 8

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


User activities.

Review activities:
AIR FORCE-84

AMSC N/A FSC 4220 REVISED (A) FOR CHANGES SEE PAGES 1 7 8

Source: https://assist.dla.mil -- Downloaded: 20260423T16:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4 220

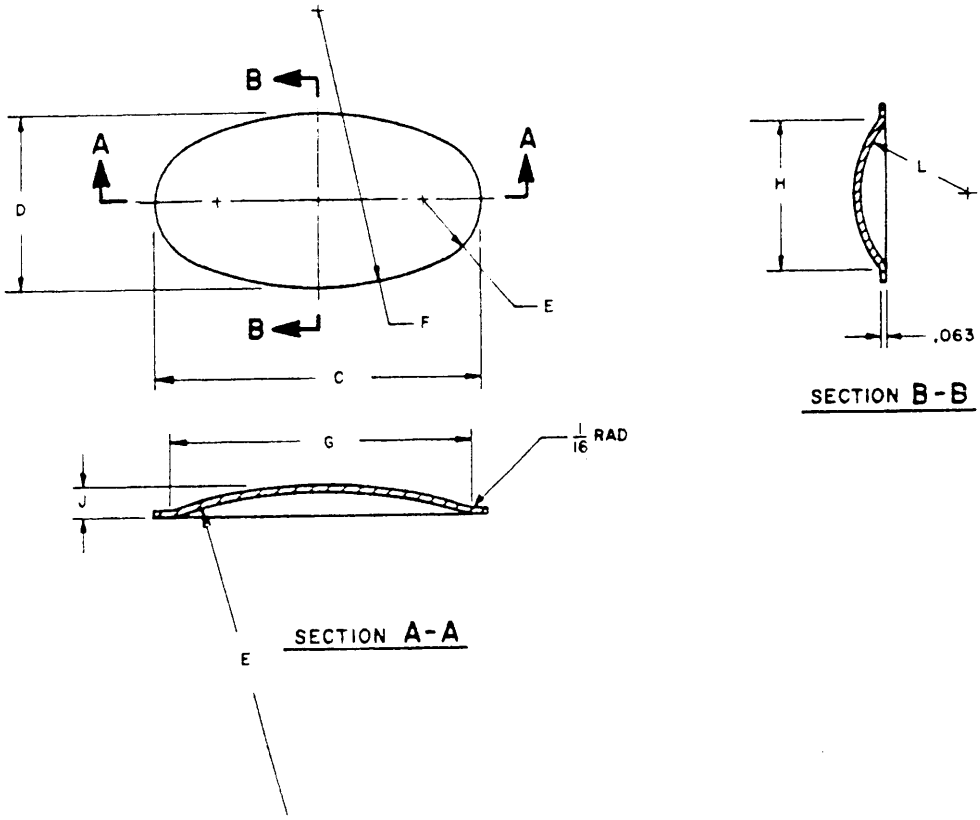

SECTION B-B

SECTION A-A

-7, -8, & -9 BASE

DASH NO	C DIM	D DIM	E RAD	F RAD	G DIM	H DIM	J DIM	K RAD	L RAD
-7	3-1/4	1-3/4	5/8	2-3/4	3	1-1/2	5/16	4-9/16	1-1/16
-8	5-1/4	2-1/4	3/4	5-1/2	5	2	5/16	12-3/4	2
-9	7-3/4	3-1/2	1-3/16	7-7/8	7-1/2	3-1/4	1/2	16-7/16	3-3/16

MATERIAL: AL ALLOY, SPEC. QQ-A-250/8

NOTE:

1. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm\frac{1}{32}$

APPROVED 8 APRIL 1968 REVISED (A) FOR CHANGES SEE PAGES 1,7 AND 8

User activities:

Review activities:
AIR FORCE - 84


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82 Other Cust SH	TITLE PLUG ASSEMBLY, (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STANDARD MS27826
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 3 OF 8

DD FORM 672-1 (Obsolete)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4220

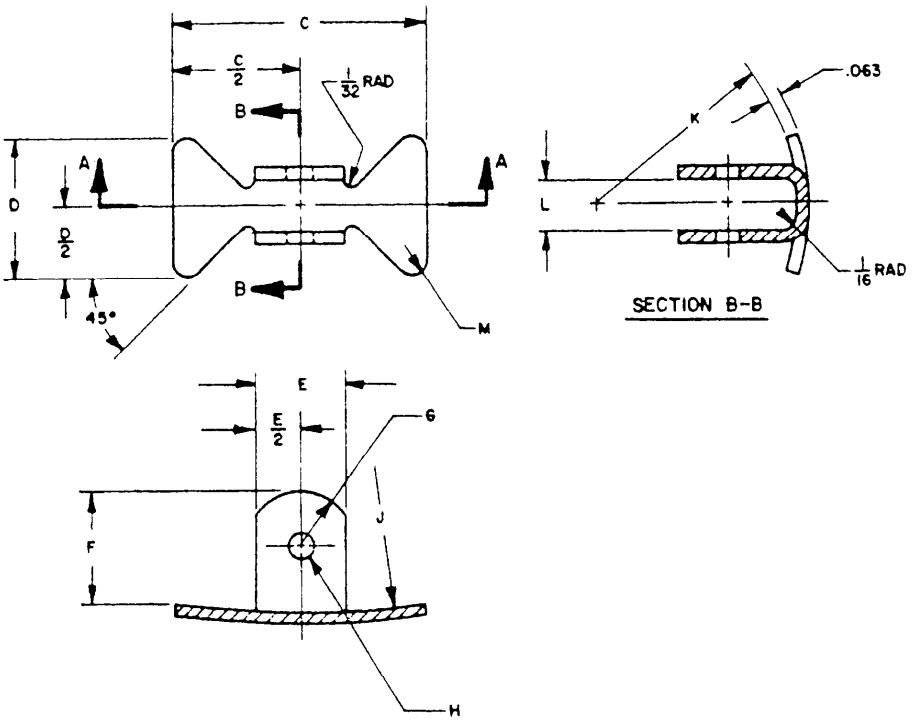

-10, -11, & -12 HINGE

DASH NO	C DIM	D DIM	E DIM	F DIM	G RAD	H DIA +.001 −.001	J RAD	K RAD	L DIM +.005 −.000	M RAD
-10	1-1/4	11/16	7/16	1/2	1/4	.128	4-1/2	1	.250	1/16
-11	1-1/4	11/16	7/16	1/2	1/4	.128	12-11/16	1-15/16	.250	1/16
-12	2	1-5/16	9/16	3/4	5/16	.191	16-3/8	3-1/8	.375	3/32

MATERIAL : AL. ALLOY, SPEC. QQ-A-250/8

NOTE:
1. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm \frac{1}{32}$


AIR FORCE - 84

Agencies of the Department of Defense, selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82	TITLE	MILITARY STAY
Other Cust SH	PLUG ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 4 OF 5

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:52Z
Check the source to verify that this is the current version before use.

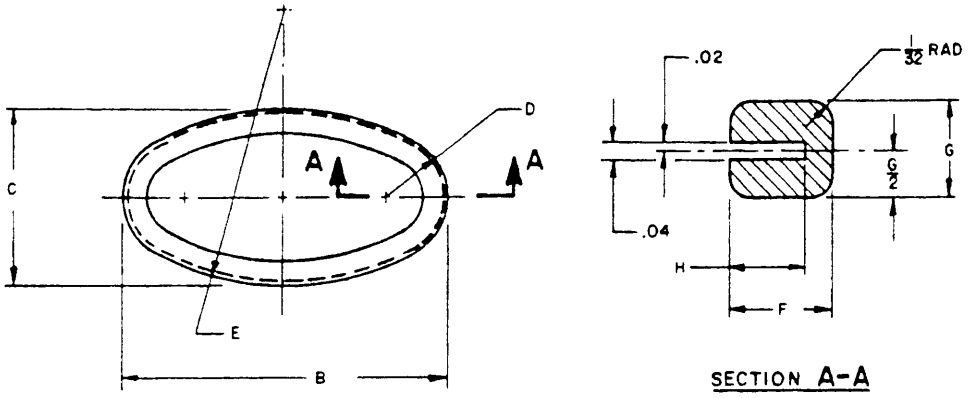

SECTION A-A

-13, -14, & -15 GASKET

DASH NO.	B DIM	C DIM	D RAD	E RAD	F DIM	G DIM	H DIM
-13	3-1/4	1-3/4	5/8	2-3/4	1/4	15/64	3/16
-14	5-1/4	2-1/4	3/4	5-1/2	1/4	15/64	3/16
-15	7-3/4	3-1/2	1-3/16	7-7/8	3/8	19/64	9/32

MATERIAL: RUBBER, SPEC. MIL-R-15624, CLASS I

NOTES:
1. DIMENSIONS SHOWN ARE TYPICAL WHEN INSTALLED. GASKET SHALL NOT BE STRETCHED MORE THAN 15% TO FIT.
2. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm\frac{1}{64}$.

APPROVED 8 APRIL 1968 REVISED (A) FOR CHANGES SEE PAGES 1, 7, AND 8

User activities:

Review activities:
AIR FORCE - 84


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. USAF - 82 Other Cust SH	TITLE PLUG ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STANDARD MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 5 OF 8

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.

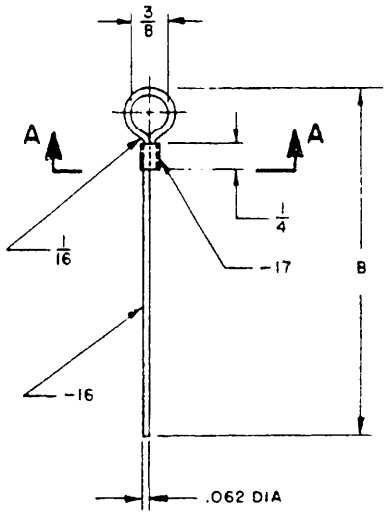



SECTION A-A

-18, -19, & -20 HANDLE

DASH NO	B DIM ±1/8
-18	3-1/2
-19	4-1/2
-20	5-1/2

MATERIAL: FOR -16 STEEL WIRE, SPEC. QQ-W-461, FINISH NO 3, TEMPER - ANNEALED
FOR -17 BRASS TUBING.


FINISH: CADMIUM PLATE, SPEC. QQ-P-416, TYPE II, CLASS 1.

NOTES:
1. -17 MAY BE OMITTED AT THE OPTION OF THE MANUFACTURER PROVIDED THE -16 LOOP IS WELDED CLOSED.
2. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm \frac{1}{32}$.

User activities:
Review activities:
AIR FORCE-84
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust SH	TITLE: PLUG ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STANDARD MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 6 OF 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T16:52Z
Check the source to verify that this is the current version before use.

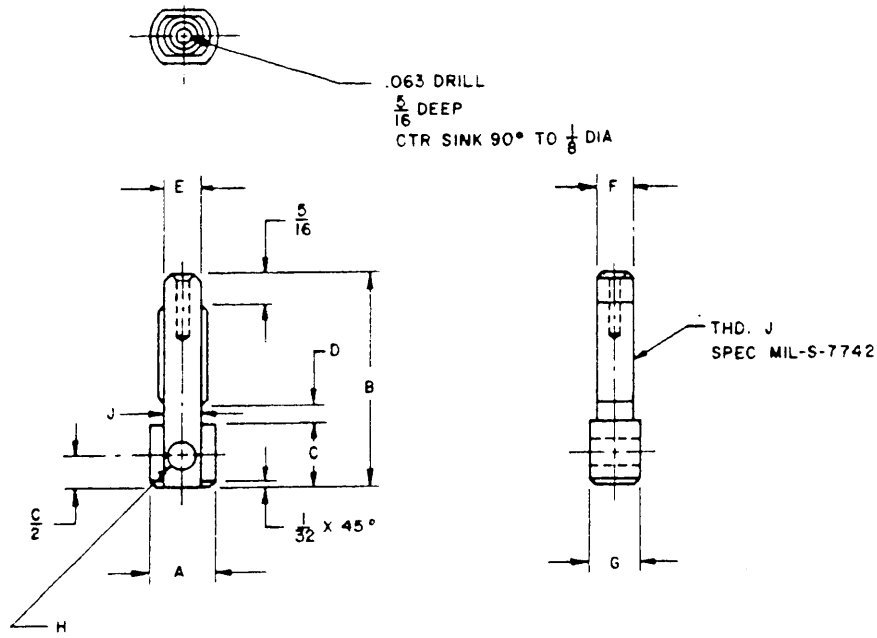

-21, & -22 STUD

DASH NO	A DIA	B DIM	C DIM	D DIM ±.010	E DIA +.000 -.005	F DIM +.000 -.000	G DIM +.000 -.005	H DRILL ±.001	J DIA ±.005	K THREAD
-21	21/64	1-1/16	5/16	.093	.180	.180	.250	.128	.188	1/4-20UNC-2A
-22	27/64	1-1/2	3/8	.125	.250	.290	.375	.191	.250	3/8-16UNC-2A

(A) MATERIAL: STEEL, SPEC. QQ-S-637
FINISH: CADMIUM PLATE, SPEC. QQ-P-416, TYPE II, CLASS 1
NOTE:
1. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ± 1/32.


APPROVED 8 APRIL 1968 REVISED (A) FOR CHANGES SEE PAGES 1, 7, AND 8


User activities:
Review activities: AIR FORCE-84
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust SH	TITLE PLUG ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STANDARD MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 7 OF 8

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T16:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4220

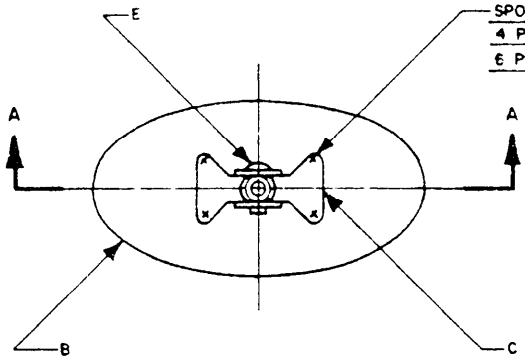

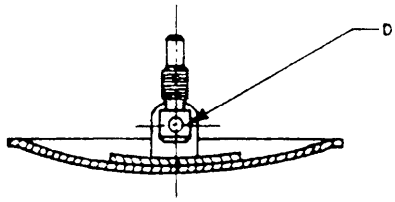

SECTION A-A

-23, -24, & -25 BASE ASSEMBLY

DASH NO	B PART	C PART	D PART	E PART
-23	-7	-10	-21	MS16535-142
-24	-8	-11	-21	MS16535-142
-25	-9	-12	-22	MS16535-331

(A)

FINISH: FOR B PART AND C PART ANODIC COATING, SPEC. MIL-A-8625 AFTER WELDING

NOTE:
1. UNLESS OTHERWISE SPECIFIED TOLERANCES ON FRACTIONS ARE $\pm \frac{1}{32}$

P.A. USAF - B2 Other Cust SH	TITLE PLUG, ASSEMBLY (SEALING CLAMP) LIFE RAFT REPAIR	MILITARY STAN. D MS27826
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 8 OF 8

DD FORM 672-1 (Coordinated)

engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:52Z
Check the source to verify that this is the current version before use.