

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

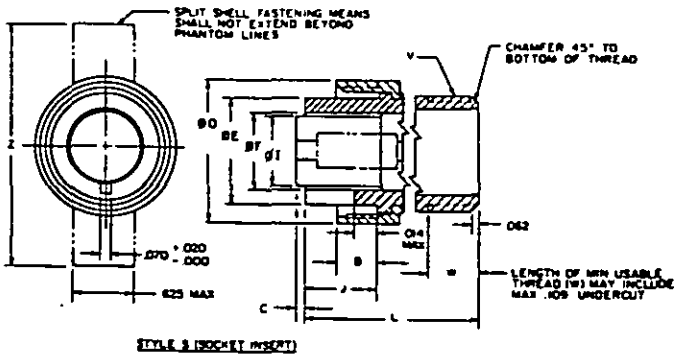

STYLE S (SOCKET INSERT)

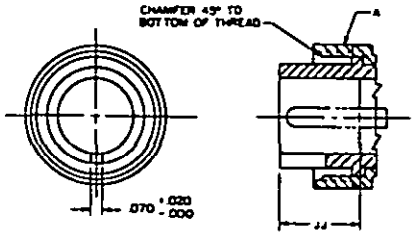

STYLE P (PIN INSERT)

CLASS A-SOLID SHELL

SIZE	A COUPLING THREAD	B +.000/-.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN Ø INSIDE	Ø1 MAX INSERT	J LENGTH ENGAGEMENT ±.005	(a) JJ +.031/-.000 INSERT LOCATION	L MAX OVERALL LENGTH	Q MAX OVERALL Ø OUTSIDE	V THREAD	W MIN USABLE THREAD	Z MAX CLASS B ONLY	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.365	.252	.250	.531	.562	1.469	.844	1/2-28	.375	.844	MIL-STD-1651
10S	5/8-24		.440	.323	.320			1.531	.969			.969	
10SL			.446	—	.440					5/8-24		1.062	
12S	3/4-20		.555	.450	.445			1.688	1.062				
12		.625				.719	.750	2.062					
14S	7/8-20	.375	.675	.526	.525	.531	.562	1.688	1.156	3/4-20		1.156	
14		.625				.719	.750	2.062					
16S	1 -20	.375	.805	.651	.650	.531	.562	1.688	1.250	7/8-20		1.250	
16		.625				.719	.750	2.062	1.344	1 -20		1.641	
18	1-1/8-18		.930	.776	.770			2.188	1.469	1-3/16-18		1.812	
20	1-1/4-18		1.050	.932	.925				1.594			1.938	
	1-3/8-18		1.175	1.026	1.020			2.312	1.719	1-7/16-18		2.062	
24	1-1/2-18		1.300	1.151	1.145				1.969			2.312	
28	1-3/4-18		1.520	1.370	1.365				2.219	1-3/4-18	.438	2.594	
32	2 -18		1.770	1.620	1.615			2.438	2.469	2 -18	.500	2.844	
36	2-1/4-16		1.980	1.838	1.830				2.719	2-1/4-16		3.000	
40	2-1/2-16		2.230	2.057	2.047								

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3106 20 AUG 92 REV D

SUPERSEDING
MS3106: C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) CLASS A IS CANCELLED AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3456W WITH APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3406.
(b) WHERE RESILIENT INSERTS ARE USED, IT MAY BE .109 LESS THAN THAT INDICATED.
(c) SOCKET INSERT OF HARD MATERIAL SHALL EXTEND .016 MAXIMUM BEYOND OR .032 MAXIMUM BELOW SHELL. SOCKET INSERT OF RESILIENT MATERIAL SHALL EXTEND .047 + .000 - .047 BEYOND SHELL AS SHOWN.
(d) CONNECTORS MS3106A REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3106A (OR B) CONNECTORS.

EXAMPLE OF PART NUMBER:

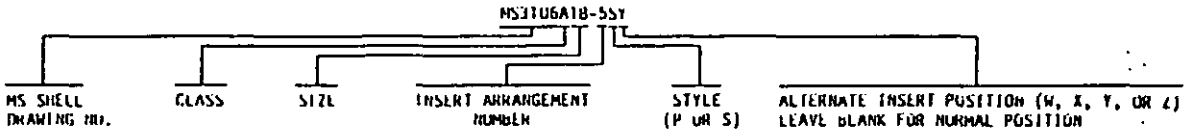

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CERTAIN PROVISIONS OF THIS SPECIFICATION SHEET ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS NEPR 28 AND STANAG 3947. WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS SPECIFICATION SHEET IS PROPOSED WHICH WILL MODIFY THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D
SUPERSEDING MS3106 C 31 AUG 90
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.


DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

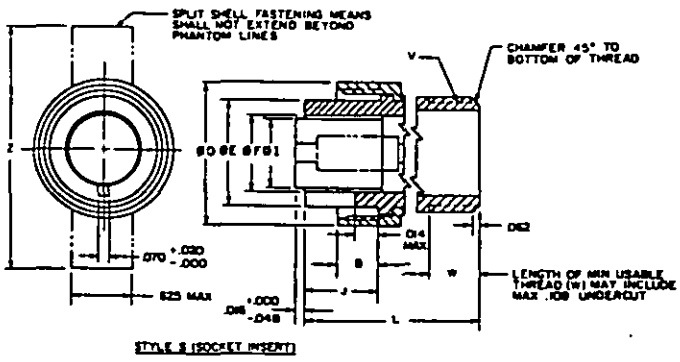

STYLE S (SOCKET INSERT)

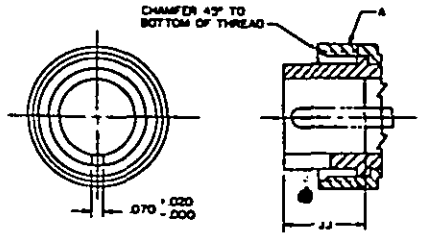

STYLE P (PIN INSERT)

CLASS K- FIREWALL

SIZE	A COUPLING THREAD	B +.000/-.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN Ø INSIDE	H MAX INSERT	J LENGTH ENGAGE-MENT	(a) JJ +.031/-.000 INSERT LOCATION	L MAX OVERALL LENGTH	Q MAX OVERALL Ø OUTSIDE	Y THREAD	W MIN	Z MAX	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.365	.252	.250	.531	.562	2.188	.844	1/2-28	.375	.844	MIL-STD-1651
10S	5/8-24		.440	.323	.320				.969	5/8-24		.969	
10SL			.446		.440							1.062	
12S	3/4-20		.555	.450	.448				1.062				
12		.625				.719	.750	2.875					
14S	7/8-20	.375	.675	.526	.525	.531	.562	2.188	1.172	3/4-20		1.156	
14		.625				.719	.750	2.875					
16S	1 -20	.375	.805	.651	.650	.531	.562	2.188	1.266	7/8-20		1.250	
16		.625				.719	.750	2.875					
18	1-1/8-18		.930	.776	.770				1.359	1 -20		1.641	
20	1-1/4-18		1.050	.932	.925				1.484	1-3/16-18		1.812	
22	1-3/8-18		1.175	1.026	1.020				1.609			1.938	
24	1-1/2-18		1.300	1.151	1.145			3.125	1.734	1-7/16-18		2.062	
28	1-3/4-18		1.520	1.370	1.365				1.984			2.312	
32	2 -18		1.770	1.620	1.615				2.234	1-3/4-18	.438	2.594	
36	2-1/4-16		1.980	1.838	1.830				2.484	2 -18	.500	2.844	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D

SUPERSEDING MS3106 C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) CLASS K IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3456K WITH APPROPRIATE MS5049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3406.

(b) CONNECTORS MS3106K REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3106K CONNECTORS.

EXAMPLE OF PART NUMBER:

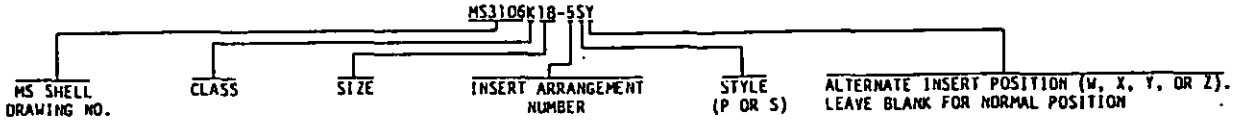

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3890	MILITARY SPECIFICATION SHEET *BRE* CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D SUPERSEDING MS3106 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 4 of 10


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

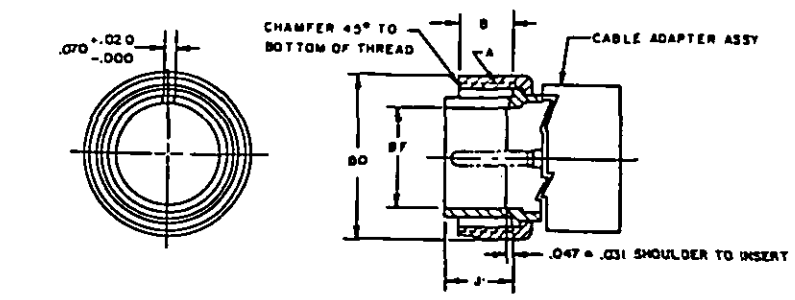

STYLE P (PIN INSERT)

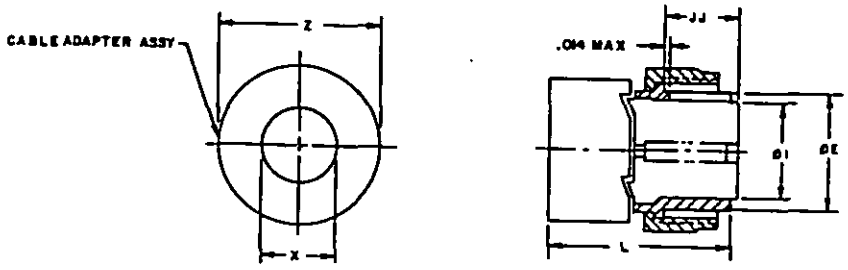

STYLE S (SOCKET INSERT)

CLASS E-ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B +.000 -.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN Ø INSIDE	ØI MAX INSERT	J +.005 LENGTH ENGAGEMENT	JJ +.047 -.000 INSERT LOCATION	L MAX OVER-ALL LENGTH	Q COUPLING NUT MAX Ø OUTSIDE	X MIN CABLE CLEARANCE	Z MAX ACROSS ADAPTER ASSY	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.365	.252	.250	.531	.531	2.250	.844	.172	1.046	MIL-STD-1651
10S	5/8-24		.440	.323	.320				.969	.281	1.125	
10SL			.446	--	.440							
12S	3/4-20	.625	.555	.450	.448	.719	.719	2.625	1.062			
14S	7/8-20	.375	.675	.526	.525	.531	.531	2.250	1.156	.406	1.343	
14		.625				.719	.719	2.625				
16S	1 -20	.375	.805	.651	.650	.531	.531	2.250	1.250	.500	1.484	
16		.625				.719	.719	2.625				
18	1-1/8-18		.930	.776	.770			2.688	1.344	.531	1.609	
20	1-1/4-18		1.050	.932	.925			2.750	1.469	.656	1.890	
22	1-3/8-18		1.175	1.026	1.020			2.969	1.594	.750		
24	1-1/2-18		1.300	1.151	1.145				1.719	.781	2.170	
28	1-3/4-18		1.520	1.370	1.365			3.031	1.969	.922		
32	2 -18		1.770	1.620	1.615				2.219	1.156	2.656	
36	2-1/4-16		1.980	1.838	1.830			3.281	2.469	1.250	2.922	
40	2-1/2-16		2.230	2.057	2.045			3.500	2.719	1.562	3.520	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3106 — 20 AUG 92 REV D

SUPERSEDING MS3106_C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS E IS CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES USE MS3106F FOR CONNECTOR WITH CLAMP AND 3106R FOR CONNECTOR WITH GROMMET SEAL. MANUFACTURERS MAY CONTINUE TO SUPPLY MS3106E CONNECTORS UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3456W WITH APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3406.

(b) CONNECTORS MS3106E REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3106E CONNECTORS.

EXAMPLE OF PART NUMBER:

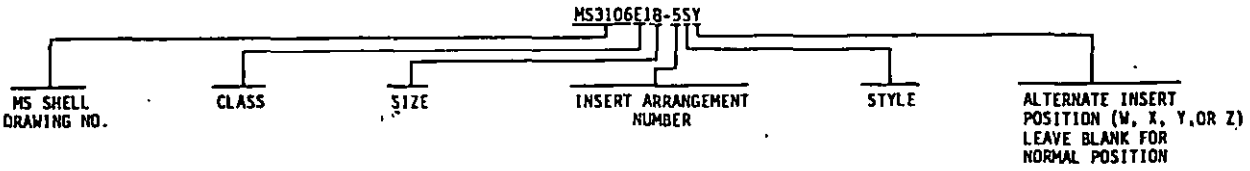

DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

(D) DENOTES CHANGE


PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG *PROJECT NUMBER:* 5935-3890	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D SUPERSEDING MS3106 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 6 of 10


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

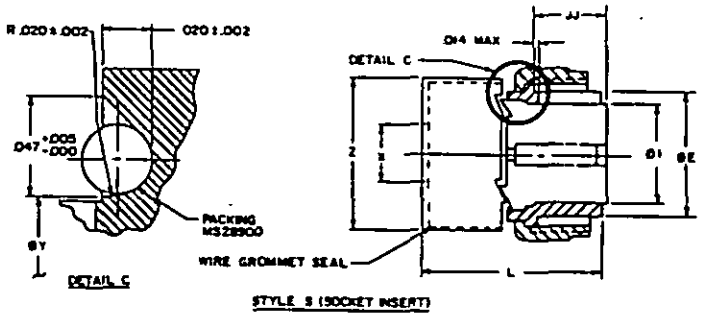

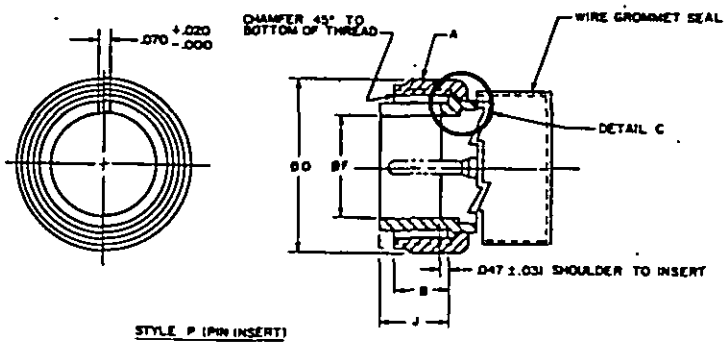

CLASS R-ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B +.000 -.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN Ø INSIDE	ØI MAX INSERT	J +.005 LENGTH ENGAGE-MENT	JJ +.047 -.000 INSERT LOCATION	L (a) MAX OVERALL LENGTH	Q COUPLING NUT MAX MAX Ø OUTSIDE	X MIN CABLE CLEARANCE	ØY +.005 -.010	Z MAX ACROSS WIRE GROMMET SEAL	FOR INSERT ARRANGEMENT SEE DRAWING	PACKING MS28900 DASH NO.
8S	1/2-28	.375	.365	.252	.250	.531	.531	1.838	.844	.172	.355	1.046	MIL-STD-1651	-8
10S	5/8-24		.440	.323	.320				.969		.440			-10
10SL			.446	—	.440						.446	1.125		
12S	3/4-20		.555	.450	.448				1.062	.281	.555			-12
12		.625				.719	.719	2.181						
14S	7/8-20	.375	.675	.526	.525	.531	.531	1.838	1.156	.406	.675	1.345		-14
14		.625				.719	.719	2.181						
16S	1 -20	.375	.805	.651	.650	.531	.531	1.838	1.250	.500	.805	1.484		-16
16		.625				.719	.719	2.181						
18	1-1/8-18		.930	.776	.770			2.281	1.344	.531	.930	1.609		-18
20	1-1/4-18		1.050	.932	.925				1.469	.656	1.050	1.890		-20
22	1-3/8-18		1.175	1.026	1.020				1.594	.750	1.175			-22
24	1-1/2-18		1.300	1.151	1.145				1.719	.781	1.300			-24
28	1-3/4-18		1.520	1.370	1.365				1.969	.922	1.520			-28
32	2 -18		1.770	1.620	1.615			2.322	2.219	1.156	1.770	2.656		-32
36	2-1/4-16		1.980	1.838	1.830				2.469	1.250	1.980	2.922		-36
40	2-1/2-16		2.230	2.057	2.045			2.430	2.719	1.562	2.230	3.328		-40

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3106 20 AUG 92 REV D

SUPERSEDING
MS3106 C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS R IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3456W CONNECTOR WITH APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3406.
(b) ADD .375 FOR SIZE "D" CONTACTS.
(c) CONNECTORS MS3106R REPLACE AND ARE INTERCHANGEABLE WITH CURRESPONDING MS3106E AND AN3106E CONNECTORS WITHOUT SADDLE TYPE CABLE CLAMP.

EXAMPLE OF PART NUMBER:

MS3106R18-5S1

MS SHELL DRAWING NO.	CLASS	SIZE	INSERT ARRANGEMENT NUMBER	STYLE (P OR S)	ALTERNATE INSERT POSITION (W, X, Y, OR Z) LEAVE BLANK FOR NORMAL POSITION

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3890	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D SUPERSEDING MS3106 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 8 of 10


DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

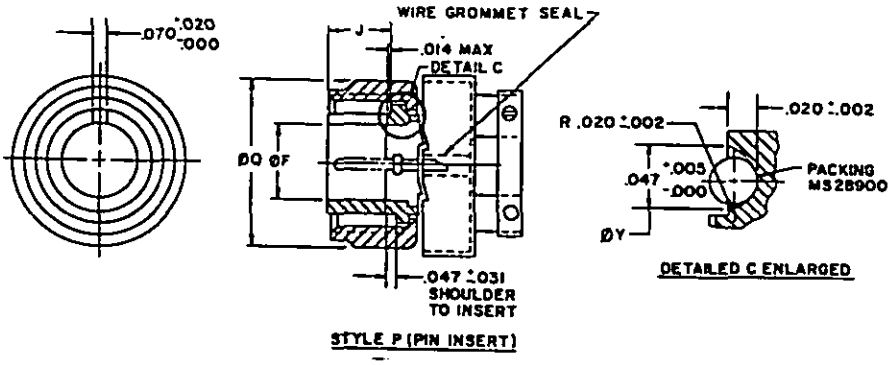

STYLE P (PIN INSERT)

DETAILED C ENLARGED

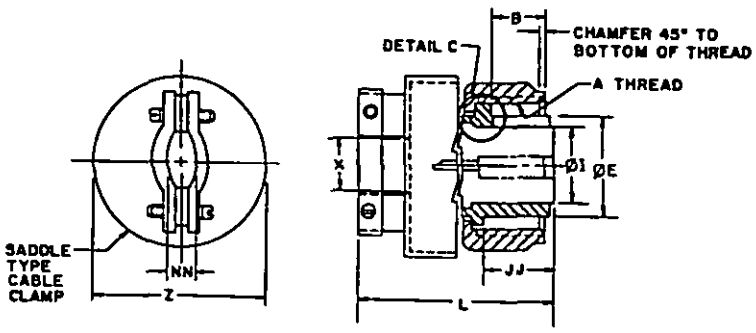

STYLE S (SOCKET INSERT)

CLASS F-ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B +.000 -.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN INSIDE Ø INSIDE	ØI MAX INSERT	J ±.005 LENGTH ENGAGEMENT	JJ +.047 -.000 INSERT LOCATION	L (a) MAX OVERALL LENGTH	Q COUPLING NUT MAX MAX Ø OUTSIDE	NN MAX CLOSED	Z MIN CABLE CLEARANCE	ØY +.005 -.010	Z MAX ACROSS CLAMP	FOR INSERT ARRANGEMENT SEE DRAWING	PACKING MS28900 DASH NO.
8S	1/2-28	.375	.365	.252	.250	.531	.531	2.312	.844	.200	.172	.355	1.046	MIL-STD-1651	-8
10S	5/8-24		.440	.323	.320				.969			.440			-10
10SL			.446	—	.440							.446			
12S	3/4-20		.555	.450	.448				1.062		.281	.555	1.125		-12
12		.625				.719	.719	2.656							
14S	7/8-20	.375	.675	.526	.525	.531	.531	2.312	1.156	.312	.406	.675	1.343		-14
14		.625				.719	.719	2.656							
16S	1 -20	.375	.805	.651	.650	.531	.531	2.312	1.250	.360	.500	.805	1.484		-16
16		.625				.719	.719	2.656							
18	1-1/8-18		.930	.776	.770			2.781	1.344	.422	.531	.9.	1.609		-18
20	1-1/4-18		1.050	.932	.925				1.469	.531	.656	1.050	1.890		-20
22	1-1/8-18		1.175	1.026	1.020				1.594		.740	1.175			-22
24	1-1/2-18		1.300	1.151	1.145			2.969	1.719	.594	.781	1.300	2.170		-24
28	1-3/4-18		1.520	1.370	1.365			3.031	1.969		.922	1.520			-28
32	2 -18		1.770	1.620	1.615			3.250	2.219		1.156	1.770	2.656		-32
36	2-1/4-16		1.980	1.838	1.830			3.281	2.469	.790	1.250	1.980	2.922		-36
40	2-1/2-16		2.230	2.057	2.045			3.500	2.723	1.100	1.562	2.230	3.531		-40

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3890

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D

SUPERSEDING MS3106 C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188


NOTES:

Ⓓ (a) CLASS F IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3456W WITH APPROPRIATE MS5049/52 BACKSHELL. *FOR SHIPBOARD JACKETED CABLES USE MS3406.*

(b) ADD .375 FOR SIZE "0" CONTACTS.

(c) CONNECTORS MS3106F REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3106E AND AN3106E CONNECTORS WITH SADDLE TYPE CABLE CLAMPS.

EXAMPLE OF PART NUMBER:

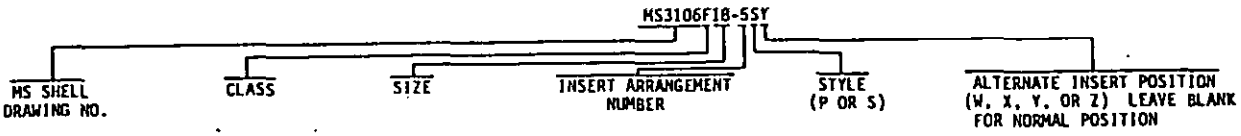

DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3890	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, STRAIGHT, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3106 20 AUG 92 REV D SUPERSEDING MS3106 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 10 of 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.