
This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

User activities:

Review activities:

FED. SUP CLASS
5935

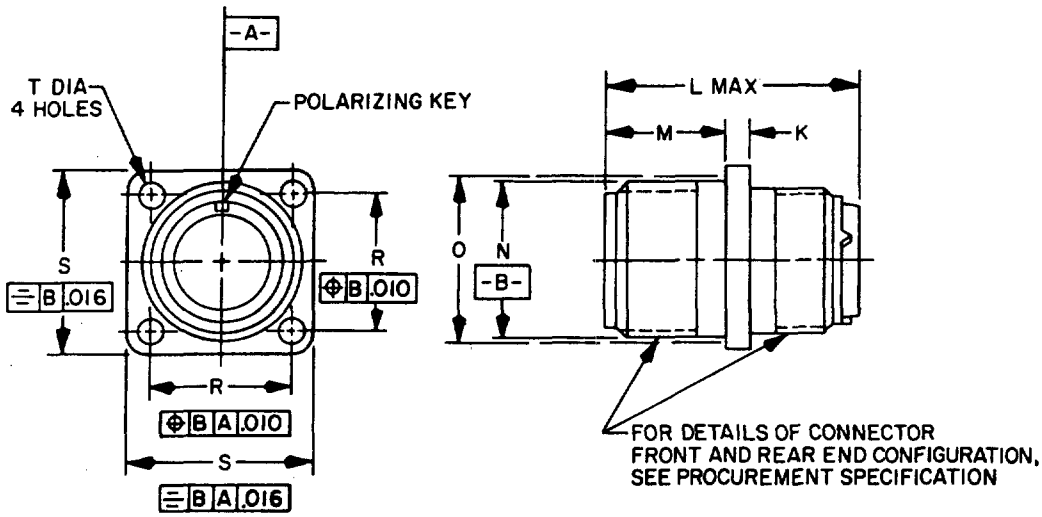

CLASSES D, K, L, U, W ENVIRONMENT RESISTANT

Class R cancelled after 18 Oct 71.
Class Y cancelled after 18 Feb 72.
Class K connectors with electroless nickel finish inactive for design after 25 Apr 74.
Classes L, U, and W inactive for design after 23 Mar 76.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
4. (G) MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
5. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
6. For insert arrangements see MIL-STD-1651.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 7 Nov 69 REVISED (E) 25 Apr 74 (F) 17 DEC 75 (G) 23 MAR 76

(G) DENOTES CHANGES

P.A Navy - AS Other Cust	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 1 OF 6

DD FORM 1 MAY 73 672 *(Limited coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-N035-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	K ±.015	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8, 4 & 0 CONT'S	M +.031 -.000	N +.000 -.062	O (REF) MTG. HOLE	R T.P. C_L-C_L	S ±.031	T +.010 -.005 CLASS DLUW	T +.010 -.005 CLASS K
8S	.083	2.031		.562	.532	.562	.594	.875	.120	.150
10S					.656	.688	.719	1.000		
10SL					.656	.688	.719	1.000		
12S		2.031		.562	.782	.812	.812	1.094		
12		2.125		.750	.782	.812	.812	1.094		
14S		2.031		.562	.906	.938	.906	1.188		
14		2.125		.750	.906	.938	.906	1.188		
16S		2.031		.562	1.032	1.062	.969	1.281		
16	.083	2.125	2.500	.750	1.032	1.062	.969	1.281		.150
18	.125				1.156	1.188	1.062	1.375		.177
20					1.282	1.312	1.156	1.500		
22				.750	1.406	1.438	1.250	1.625	.120	
24				.812	1.532	1.562	1.375	1.750	.147	
28				.812	1.782	1.812	1.562	2.000	.147	.177
32				.875	2.032	2.062	1.750	2.250	.173	.209
36					2.282	2.312	1.938	2.500		
40					2.532	2.562	2.188	2.750		
44					2.782	2.812	2.375	3.000		
48	.125	2.125	2.500	.875	3.032	3.062	2.625	3.250	.173	.209

(G)

EXAMPLE OF PART NO.: MS3400D 18-5PX

MS3400 D 18 - 5 P X

- MS3400 — Basic part number
- D — Class D, K, L, U & W
- 18 — Material designator S - Stainless steel. T - Ferrous alloy with cadmium plate. Leave blank for aluminum alloy.
- 5 — Shell size
- P — Insert arrangement
- X — Contact designator
- Alternate insert position W, X, Y, or Z. - Leave blank for normal position.

APPROVED 7 Nov 69 REVISED (F) Entire standard revised (G) FOR CHANGES SEE PAGES I THRU 6

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 2 OF 6


DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

User activities:

Review activities:

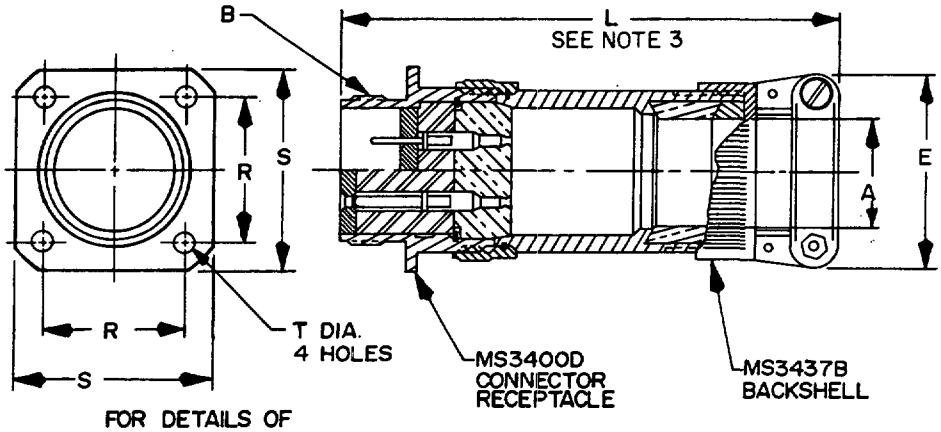

FOR DETAILS OF CONNECTOR FRONT & REAR END CONFIGURATION SEE PROCUREMENT SPECIFICATION

CLASS DJ ENVIRONMENT RESISTANT

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. For size 8, 4 and 0 contacts, add .375 to overall length.
4. (G) Unit package shall be marked with class DJ part number only. Connector shall be marked with class D part number.
5. This assembly is available only with class D or DS connector receptacle for jacketed cable.
6. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
7. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
8. Dimensions and tolerances in accordance with ANSI Y14.5-1973.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 7 Nov 69 REVISED (F) Entire standard revised (G) For changes see pages 1 THRU 6

P.A Navy - AS Other Cust 0	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT - RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 3 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS
5935

ASSEMBLY NO.	CONNECTOR RECEPTACLE NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX.	A CABLE ENTRY MIN.	B THREAD CLASS 2	E MAX.	L MAX.	R +.005 -.000	S +.031 -.000	T DIA. MAX.
MS3400DJ 10AXX	MS3400D-10S-XX	MS3437B-9A	.312	.125	.625-24UNEF	.957	4.938	.719	1.000	.120
10BXX	-10S-XX	-11A	.437	.250		1.145	5.688	.719	1.000	.120
10DXX	-10S-XX	-136A	.375	.250		1.145	4.938	.719	1.000	.120
11AXX	-10SL-XX	-9A	.312	.125		.957	4.938	.719	1.000	.120
11BXX	-10SL-XX	-11A	.437	.250		1.145	5.688	.719	1.000	.120
11DXX	-10SL-XX	-136A	.375	.250	.625-24UNEF	1.145	4.938	.719	1.000	.120
13AXX	-12S-XX	-114A	.312	.125	.750-20UNEF	.957	4.938	.812	1.094	.120
13BXX	-12S-XX	-15A	.625	.350		1.332	5.688	.812	1.094	.120
13DXX	-12S-XX	-138A	.500	.350		1.332	4.938	.812	1.094	.120
13EXX	-12S-XX	-13A	.437	.250		1.145	4.938	.812	1.094	.120
12AXX	-12-XX	-114A	.312	.125		.957	4.938	.812	1.094	.120
12BXX	-12-XX	-15A	.625	.350		1.332	5.688	.812	1.094	.120
12DXX	-12-XX	-138A	.500	.350		1.332	4.938	.812	1.094	.120
12EXX	-12-XX	-13A	.437	.250	.750-20UNEF	1.145	4.938	.812	1.094	.120
15AXX	-14S-XX	-116A	.437	.250	.875-20UNEF	1.145	4.938	.906	1.188	.120
15BXX	-14S-XX	-19A	.750	.500		1.551	5.750	.906	1.188	.120
15DXX	-14S-XX	-17A	.575	.350		1.332	4.938	.906	1.188	.120
15EXX	-14S-XX	-150A	.312	.125		.957	4.938	.906	1.188	.120
14AXX	-14-XX	-116A	.437	.250		1.145	4.938	.906	1.188	.120
14BXX	-14-XX	-19A	.750	.500		1.551	5.750	.906	1.188	.120
14DXX	-14-XX	-17A	.575	.350		1.332	4.938	.906	1.188	.120
14EXX	-14-XX	-150A	.312	.125	.875-20UNEF	.957	4.938	.906	1.188	.120
17AXX	-16S-XX	-21A	.700	.500	1.000-20UNEF	1.551	5.000	.969	1.284	.120
17BXX	-16S-XX	-23A	.937	.625		1.770	5.812	.969	1.284	.120
17DXX	-16S-XX	-112A	.437	.250		1.145	4.938	.969	1.284	.120
17EXX	-16S-XX	-118A	.625	.350		1.332	4.938	.969	1.284	.120
16AXX	-16-XX	-21A	.700	.500		1.551	5.000	.969	1.284	.120
16BXX	-16-XX	-23A	.937	.625		1.770	5.812	.969	1.284	.120
16DXX	-16-XX	-112A	.437	.250		1.145	4.938	.969	1.284	.120
16EXX	-16-XX	-118A	.625	.350	1.000-20UNEF	1.332	4.938	.969	1.284	.120
18AXX	-18-XX	-25A	.625	.350	1.125-18UNEF	1.332	4.938	1.062	1.375	.120
18BXX	-18-XX	-27A	.750	.500		1.551	5.000	1.062	1.375	.120
18EXX	-18-XX	-120A	.312	.125		.957	4.938	1.062	1.375	.120
18FXX	-18-XX	-122A	.437	.250	1.125-18UNEF	1.145	4.938	1.062	1.375	.120
20AXX	-20-XX	-31A	.625	.350	1.250-18UNEF	1.332	5.938	1.156	1.500	.120
20BXX	-20-XX	-33A	.750	.500		1.551	6.000	1.156	1.500	.120
20EXX	-20-XX	-37A	1.250	.875		2.113	7.062	1.156	1.500	.120
20FXX	-20-XX	-124A	.437	.250		1.145	5.938	1.156	1.500	.120
20GXX	-20-XX	-140A	.904	.625	1.250-18UNEF	1.770	6.062	1.156	1.500	.120
22AXX	-22-XX	-39A	.625	.350	1.375-18UNEF	1.332	5.938	1.250	1.625	.120
22BXX	-22-XX	-41A	.750	.500		1.551	6.000	1.250	1.625	.120
22DXX	-22-XX	-43A	.937	.625		1.770	6.062	1.250	1.625	.120
22EXX	-22-XX	-45A	1.250	.875		2.113	7.062	1.250	1.625	.120
MS3400DJ 22FXX	MS3400D-22-XX	MS3437B-126A	.312	.125	1.375-18UNEF	.957	5.938	1.250	1.625	.120

APPROVED 7 Nov 69 REVISED (F) Entire standard revised (G) For changes see pages 1 THRU 6

(G)

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 4 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

ASSEMBLY NO.	CONNECTOR RECEPTACLE NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX.	A CABLE ENTRY MIN.	B THREAD CLASS 2	E MAX.	L MAX.	R +.005 -.000	S +.031 -.000	T DIA. MAX.
MS3400DJ 22GXX	MS3400D-22-XX	MS3437B-128A	.437	.250	1.375-18UNEF	1.145	5.938	1.250	1.625	.120
22HXX	-22-XX	-142A	1.029	.875	1.375-18UNEF	2.113	6.312	1.250	1.625	.120
24AXX	-24-XX	-47A	.750	.500	1.500-18UNEF	1.551	6.000	1.375	1.750	.147
24BXX	-24-XX	-49A	.812	.625		1.770	6.062	1.375	1.750	.147
24DXX	-24-XX	-51A	.937	.625		1.770	6.062	1.375	1.750	.147
24EXX	-24-XX	-53A	1.250	.875		2.113	7.062	1.375	1.750	.147
24FXX	-24-XX	-130A	.625	.350		1.332	5.938	1.375	1.750	.147
24GXX	-24-XX	-144A	1.144	.875	1.500-18UNEF	2.113	6.312	1.375	1.750	.147
28AXX	-28-XX	-55A	.750	.500	1.750-18UNS	1.551	6.000	1.562	2.000	.147
28BXX	-28-XX	-57A	.937	.625		1.770	6.062	1.562	2.000	.147
28DXX	-28-XX	-59A	1.250	.875		2.113	6.312	1.562	2.000	.147
28EXX	-28-XX	-61A	1.375	1.000	1.750-18UNS	2.363	6.438	1.562	2.000	.147
32AXX	-32-XX	-63A	.937	.625	2.000-18UNS	1.770	6.062	1.750	2.250	.173
32BXX	-32-XX	-65A	1.250	.875		2.113	6.312	1.750	2.250	.173
32DXX	-32-XX	-67A	1.375	1.000		2.363	6.438	1.750	2.250	.173
32EXX	-32-XX	-69A	1.625	1.250	2.000-18UNS	2.770	6.750	1.750	2.250	.173
36AXX	-36-XX	-71A	1.250	.875	2.250-16UN	2.113	7.312	1.938	2.500	.173
36BXX	-36-XX	-73A	1.375	1.000		2.363	7.438	1.938	2.500	.173
36DXX	-36-XX	-75A	1.625	1.250		2.770	7.688	1.938	2.500	.173
36EXX	-36-XX	-146A	1.840	1.437		3.020	7.750	1.938	2.500	.173
36FXX	-36-XX	-132A	.750	.500		1.551	7.000	1.938	2.500	.173
36GXX	-36-XX	-148A	.937	.625	2.250-16UN	1.770	7.062	1.938	2.500	.173
40AXX	-40-XX	-79A	1.250	.875	2.500-16UN	2.113	7.312	2.188	2.750	.173
40BXX	-40-XX	-81A	1.375	1.000		2.363	7.438	2.188	2.750	.173
40DXX	-40-XX	-83A	1.625	1.250		2.770	7.688	2.188	2.750	.173
40EXX	-40-XX	-85A	1.840	1.437		3.020	7.750	2.188	2.750	.173
40FXX	-40-XX	-134A	.750	.500	2.500-16UN	1.551	7.000	2.188	2.750	.173
44AXX	-44-XX	-87A	1.250	.875	2.750-16UN	2.113	7.312	2.375	3.000	.173
44BXX	-44-XX	-89A	1.375	1.000		2.363	7.438	2.375	3.000	.173
44DXX	-44-XX	-91A	1.625	1.250		2.770	7.688	2.375	3.000	.173
44EXX	-44-XX	-93A	1.840	1.437		3.020	7.750	2.375	3.000	.173
44FXX	-44-XX	-154A	.937	.625	2.750-16UN	1.770	7.062	2.375	3.000	.173
48AXX	-48-XX	-95A	1.250	.875	3.000-16UN	2.113	7.312	2.625	3.250	.173
48BXX	-48-XX	-97A	1.375	1.000		2.363	7.438	2.625	3.250	.173
48DXX	-48-XX	-99A	1.625	1.250		2.770	7.688	2.625	3.250	.173
MS3400DJ 48EXX	MS3400D-48-XX	MS3437B-101A	1.840	1.437	3.000-16UN	3.020	7.750	2.625	3.250	.173

APPROVED 7 Nov 69 REVISED (F) Entire standard revised (G) For changes see pages 1 THRU 6 (G)

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS	International interest.	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 5 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

User activities:


Review activities:

FED. SUP CLASS
5935

SUPERSESSION DATA

Bushipps Dwg. RE49D2039 Part number	Superseded by Part number
10-214010-**	MS3400DJ10A**
011-**	11A**
012-**	13A** Ⓖ
013-**	12A**
014-**	15A**
015-**	14A**
016-**	17E**
017-**	16E**
018-**	18A**
020-**	20B**
022-**	22B**
024-**	24D**
028-**	28B**
032-**	32B**
036-**	36B**
040-**	40D**
10-214044-**	MS3400DJ44E**

EXAMPLE OF PART NO.: MS3400DJ 18A11PY

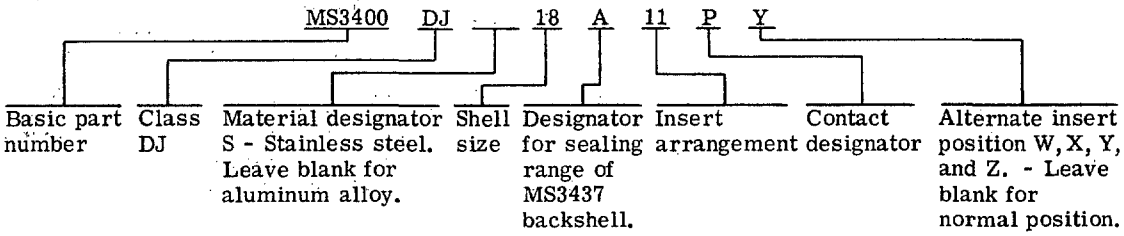

APPROVED 7 Nov 69 REVISED Ⓕ Entire standard revised Ⓖ For changes see pages 1 THRU 6

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, WALL MOUNTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3400(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/4221