
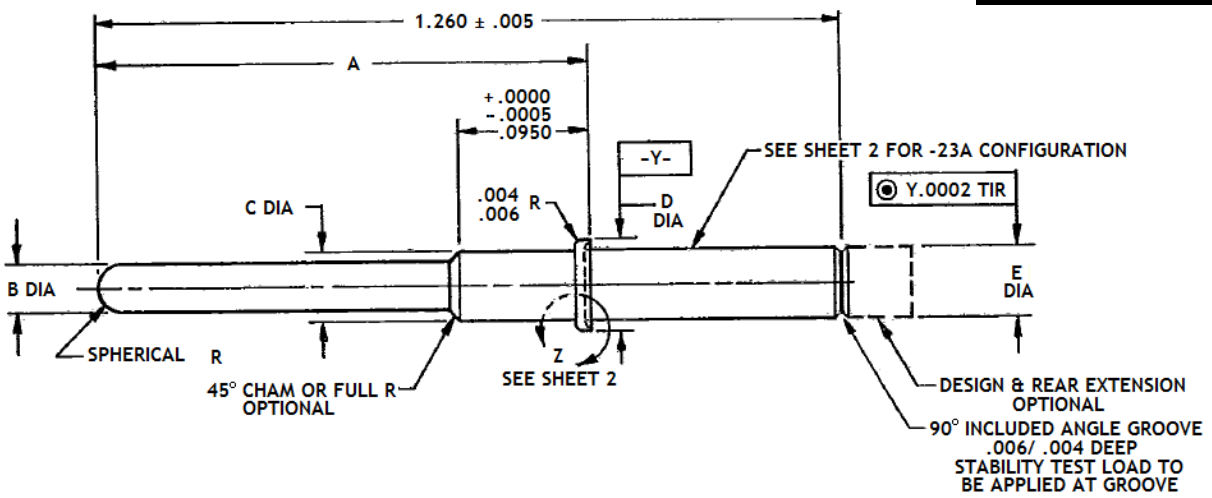


DASH NUMBER	A +.0005 -.0000	B ±.0005	C ±.0005	D +.0002 -.0000	E +.0000 -.0002
-23A	.4200	.0270	.0385	.0540	.0480
-20A	.4200	.0405	.0610	.0745	.0615
-16A	.4200	.0625	.0929	.1065	.0925
-12A	.4200	.0945	.1510	.1680	.1515

FIGURE I
GAGE FOR PIN LOCATION AND RETENTION FEATURE TESTS
SERIES 3 AND 4 CONNECTORS ONLY

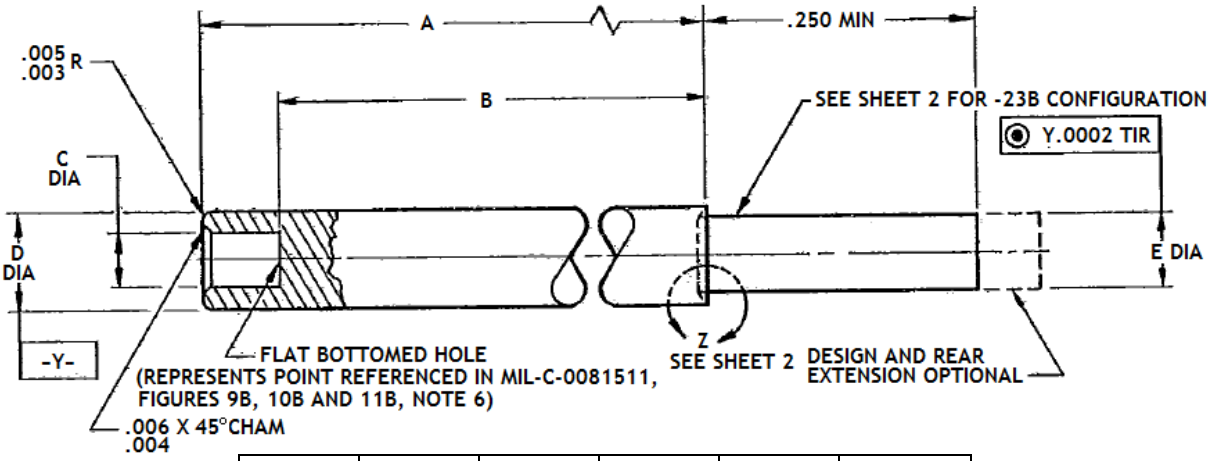

DASH NUMBER	A +.0000 -.0005	B +.0005 -.0000	C ±.001	D +.0002 -.0000	E +.0000 -.0002
-23B	.726	.688	.030	.0540	.0480
-20B	.726	.681	.043	.0745	.0615
-16B	.726	.676	.066	.1065	.0925
-12B	.716	.666	.098	.1680	.1515

FIGURE II
GAGE FOR SOCKET LOCATION AND RETENTION FEATURE TESTS
SERIES 3 CONNECTORS ONLY

NOTES: SEE SHEET 2

APPROVED 18 OCT 71 REVISED


Reviewer symbols:
NAVY – EC

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY – AS Other Cust.	TITLE **TEST GAGE, CONTACT LOCATION AND RETENTION FEATURE, MIL-C-0081511 SERIES 3 AND 4 CONNECTORS**	**MILITARY STANDARD** **MS 3435 (NAVY)**
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

Reviewer symbols:
NAVY – EC

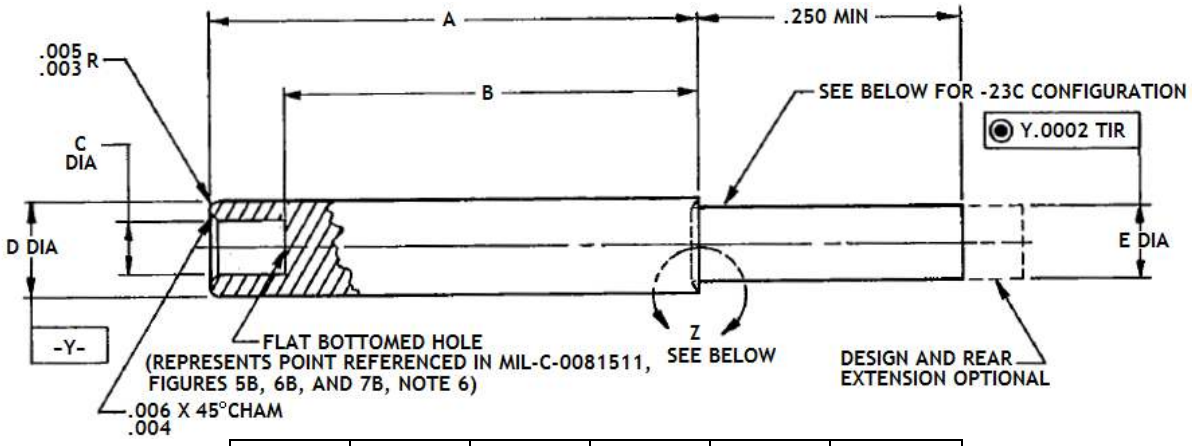


DASH NUMBER	A +.0000 -.0005	B +.0005 -.0000	C ±.001	D +.0002 -.0000	E +.0000 -.0002
-23C	.3960	.358	.030	.0540	.0480
-20C	.3960	.351	.043	.0745	.0615
-16C	.3960	.346	.066	.1065	.0925
-12C	.3860	.336	.098	.1680	.1515

FIGURE III
GAGE FOR SOCKET LOCATION AND RETENTION FEATURE TESTS
SERIES 4 CONNECTORS ONLY



SECTION AT Z

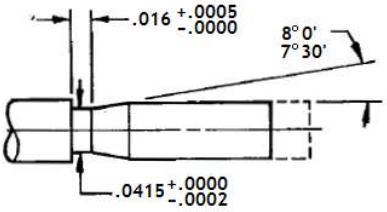

GAGE END, REAR, -23 ONLY

APPLICABLE TO FIGURES I, II, AND III

5. PART NUMBER EXAMPLE: MS::::::::-23A
BASIC PART NUMBER — DASH NUMBER (CORRESPONDS TO CAVITY SIZE)

4. ALL DIA'S TO BE CONCENTRIC TO --y-- WITHIN .002 TIR UNLESS OTHERWISE SPECIFIED.

3. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

2. SURFACE ROUGHNESS: 32 MICROINCH OR BETTER.

1. MATERIAL: STEEL SUITABLEY TREATED TO WITHSTAND USAGE.

NOTES:

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 18 OCT 71 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.