
INCH-POUND
MS39061E
2 December 2021
SUPERSEDING
MS39061D
21 December 2004

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, SPST, AND SPDT, 24 VOLT DC, 25 AMPERE (WATERPROOF)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-DTL-13735.

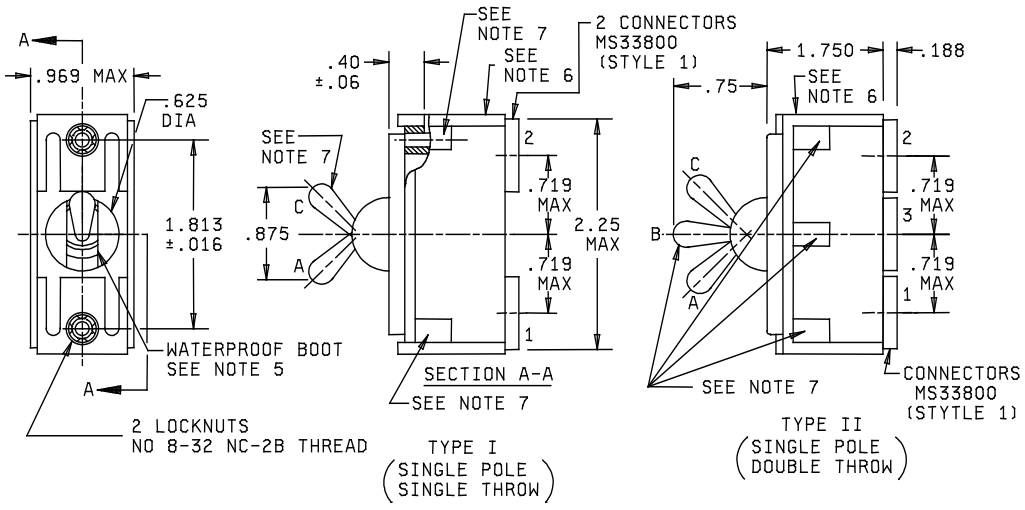


Configuration A

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.030 on decimals and ±.5º on angles.
3. Switch shall withstand a force of 25 pounds applied .125 ±.031 inch from the end of the switch lever. and the lever dimensions shall be such as to allow for incorporation of the luminous shown on USAF DWG 43A17587.
4. Waterproof boot for switch lever shall meet the environmental requirements of MIL-DTL-13735.
5. Contour of switch optional provided maximum dimensions specified are not exceeded.
6. Marking shall consist of the PIN and Manufacturers Identification in accordance with MIL-STD-130 and lever position identification in accordance with figure 1, configuration A.

FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

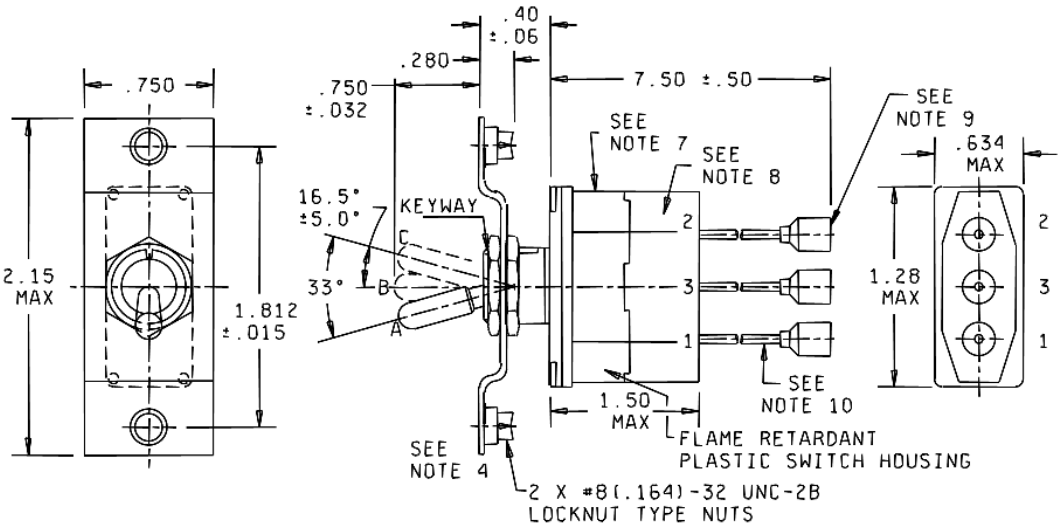


Configuration B (Grade 1, Type I and II).

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.030 on decimals and ±10º on angles.
3. Mounting plate shall be rigidly and firmly assembled to the switch as shown.
4. Switch shall withstand a force of 25 pounds applied .125 ±.031 inch from the end of the switch lever.
5. The lever dimensions shall be such as to allow for incorporation of the luminous shown on figure 2.
6. Contour of switch optional provided maximum dimensions specified are not exceeded.
7. All exposed switch terminals shall be encapsulated with potting material. Presence of thin traces of potting material on switch base allowed.
8. All wire leads shall be supplied with connectors in accordance with MS27142-2 per MS27142 or equivalent.
9. Lead wires shall be 14 AWG, M13486/1-5 in accordance with MIL-DTL-13486/1, color black. Each lead wire shall be marked with numerals 1 through 3. Non-functional lead wires shall not be supplied.
10. At minimum, marking shall consist of the PIN and Manufacturers Identification in accordance with MIL-STD-130 and lever position identification in.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

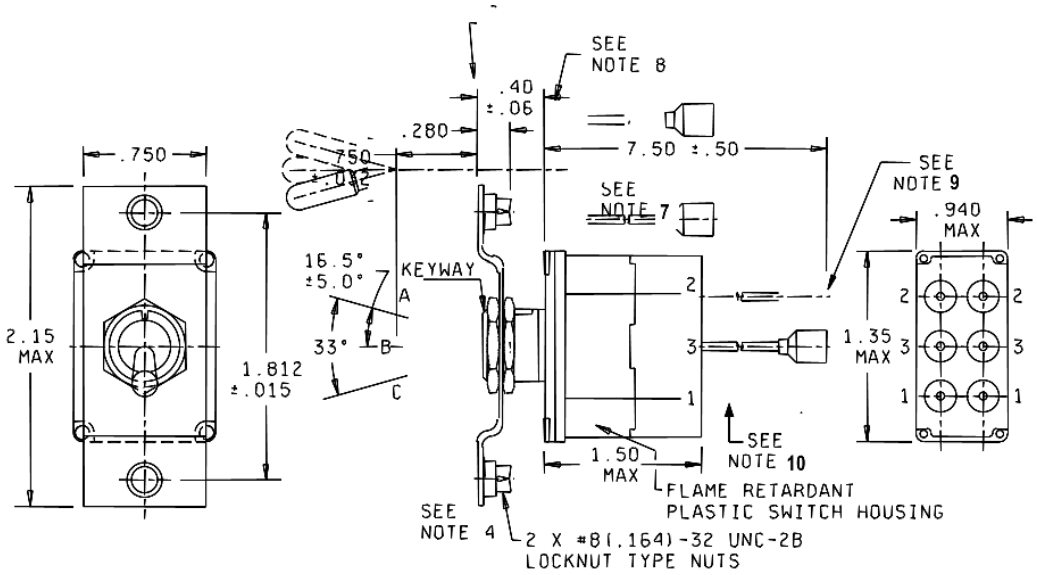

Configuration C (Grade 1, Type III and IV).

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.030 on decimals and ±10º on angles.
3. Mounting plate shall be rigidly and firmly assembled to the switch as shown.
4. Switch shall withstand a force of 25 pounds applied .125 ±.031 inch from the end of the switch lever.
5. The lever dimensions shall be such as to allow for incorporation of the luminous shown on figure 2.
6. Contour of switch optional provided maximum dimensions specified are not exceeded.
7. All exposed switch terminals shall be encapsulated with potting material. Presence of thin traces of potting material on switch base allowed.
8. All wire leads shall be supplied with connectors in accordance with MS27142-2 per MS27142 or equivalent.
9. Lead wires shall be 14 AWG, M13486/1-5 in accordance with MIL-DTL-13486/1, color black. Each lead wire shall be marked with numerals 1 through 3. Non-functional lead wires shall not be supplied.
10. Marking shall consist of the PIN and Manufacturers Identification in accordance with MIL-STD-130 and lever position identification.

FIGURE 1. Dimensions and configurations - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

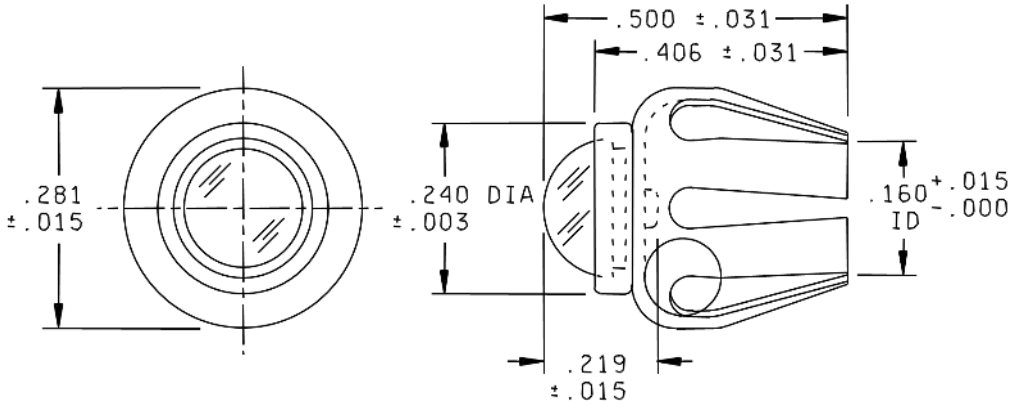


FIGURE 2. Luminous dimensions

REQUIREMENTS:

Dimension and configuration: See figure 1.

Terminals:

Configuration A: MS33800 or equivalent. Wire leads (when applicable), shall be 16 AWG, M13486/1-3 in accordance with MIL-DTL-13486/1, color black. Each lead wire shall be marked with numerals 1 through 3. Non-functional lead wires shall not be supplied.

Configuration B or C: MS27142-2 per MS27142 or equivalent. Wire leads (when applicable), shall be 14 AWG, M13486/1-5 in accordance with MIL-DTL-13486/1, color black. Each lead wire shall be marked with numerals 1 through 3. Non-functional lead wires shall not be supplied.

Switching characteristics: See table II. Direction of movement of internal mechanism is opposite to the direction of the toggle movement.

Sealing: The switches shall be immersed in an enclosure containing water. The enclosure shall be subjected to a vacuum resulting in an absolute pressure equal to 2.0 ±0.5 inches of mercury for 5 minutes. The immersed switches shall be observed for leakage as evidenced by a continuous stream of bubbles emanating from the water prior to release of the vacuum.

Electrical ratings: See table I.

Contact voltage drop: Shall not exceed 50 millivolts when tested using load of 100 milliamperes at 2-6 volts dc. Switch contacts shall be actuated 3 times prior to taking the final measurement.

Part or Identifying Number (PIN): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings, configurations A, B, and C.

Load	Configuration A 24 V dc (amperes)	Configuration B 24 V dc (amperes)	Configuration C 24 V dc (amperes)
Resistive	25	25	25
Inductive	15	15	15
Lamp	6	6	6

TABLE II. Switching characteristics and PIN's for configuration A.

PIN	Former Government Designation	MIL-DTL-13735	Configuration 1/	Circuit with toggle lever in position			
		Type	Class		A	B Center	C
MS39061-1	8376806	I	B	A or B	On (1–2)	None	Off
MS39061-2	8376807	I	A	A or B	Mom. On (1–2)	None	Off
MS39061-3	8376808	I	AB	A or B	On (1–2)	None	Mom. off
MS39061-4	8376809	II	B	A or B	On (2–3)	Off	On (1–3)
MS39061-5	8376810	I	AB	A or B	On (2–3)	None	Mom. On (1–3)
MS39061-6	8376811	II	AB	A or B	On (2–3)	Off	Mom. On (1–3)
MS39061-7	8376812	I	AB	A or B	On (2–3)	None	On (1–3)
MS39061-8	8376813	II	A	A or B	Mom. On (2–3)	Off	Mom. On (1–3)
MS39061-9	7954899	III	B	C	On (1–3)	None	Off
MS39061-10	7954900	IV	B	C	On (1–3	Off	On (2–3)
MS39061-11	7954901	IV	AB	C	Mom. On (1–3)	None	On (2–3)
MS39061-12	7954902	IV	AB	C	Mom. On (1–3)	Off	On (2–3)
MS39061-13	7954903	IV	B	C	On (1–3)	None	On (2–3)
MS39061-14	7954904	III	A	C	Mom. On (1–3)	None	Off
MS39061-15	7954905	IV	A	C	Mom. On (1–3)	Off	Mom. On (2-3)
MS39061-16	7954906	III	AB	C	On (1–)3	None	Mom. off

1/ Configurations A and B are functionally interchangeable.
2/ Configuration C is functionally interchangeable with multi-pole, grade 1, toggle switches per former Ordnance Corps drawing 7954899 through 7954906.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents

MIL-DTL-13735
MIL-DTL-13486/1
MS27142
MIL-STD-130
MS33800
USAF DWG 43A17587

Custodians:
Army - AT
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:45Z
Check the source to verify that this is the current version before use.